

## RECOMMENDATION 383-5\*

**RADIO-FREQUENCY CHANNEL ARRANGEMENTS FOR HIGH CAPACITY  
RADIO-RELAY SYSTEMS OPERATING IN THE LOWER 6 GHz BAND**

(Question 136/9)

(1959-1963-1966-1982-1986-1990-1992)

The CCIR,

*considers*

- a) that it is sometimes desirable to be able to interconnect radio-relay systems on international circuits in the 6 GHz band at radio frequencies;
- b) that, in a frequency band 500 MHz wide, it may be desirable to interconnect up to eight go and eight return channels;
- c) that economy may be achieved if at least four go and four return channels can be interconnected between systems, each of which uses common transmit-receive antennas;
- d) that many interfering effects can be substantially reduced by a carefully planned arrangement of the radio frequencies in radio-relay systems employing several radio-frequency channels;
- e) that the use of certain types of modulation permits the use of the radio-frequency channel arrangements defined for 1 800 telephone channel systems for the transmission of digital channels with a bit rate of the order of 140 Mbit/s or synchronous digital hierarchy bit rates;
- f) that for these digital radio systems, further economies are possible by accommodating up to eight go and eight return channels on a single antenna;
- g) that it may sometimes be desirable to interleave additional radio-frequency channels between those of the main pattern;
- h) that there may be a desire to interconnect more than eight go and eight return radio-frequency channels, each with a capacity significantly lower than 1 800 telephone channels;
- j) that it is also highly desirable to be able to operate systems using a mix of analogue and digital radio channels on the same route,

*recommends*

1. that the preferred radio-frequency channel arrangement for up to eight go and return channels with each channel being either an analogue channel accommodating 1 800 telephone channels, or the equivalent, or a digital channel with a capacity of the order of 140 Mbit/s, or synchronous digital hierarchy bit rates and operating at frequencies in the lower 6 GHz band (Note 7), should be as shown in Fig. 1 and should be derived as follows:

- Let:
- $f_0$  be the frequency of the centre of the band of frequencies occupied (MHz)
  - $f_n$  be the centre frequency of one radio-frequency channel in the lower half of the band (MHz)
  - $f'_n$  be the centre frequency of one radio-frequency channel in the upper half of the band (MHz);

---

\* This Recommendation applies only to line-of-sight and near line-of-sight radio-relay systems.

then the frequencies (MHz) of individual channels are expressed by the following relationships:

$$\text{lower half of the band: } f_n = f_0 - 259.45 + 29.65 n$$

$$\text{upper half of the band: } f'_n = f_0 - 7.41 + 29.65 n$$


where:

$$n = 1, 2, 3, 4, 5, 6, 7 \text{ or } 8;$$

FIGURE 1

**Radio-frequency channel arrangement for radio-relay systems operating in the 6 GHz band for use in international connections**

(All frequencies are in MHz)

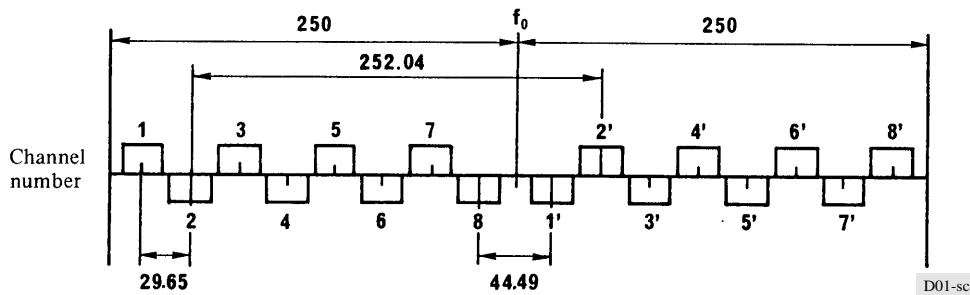

2. that, in a section over which the international connection is arranged, all the go channels should be in one half of the band, and all the return channels should be in the other half of the band;
3. that the go and return channels on a given section should preferably use polarizations as shown below:

	<i>Go</i>	<i>Return</i>
H(V)	1 3 5 7	2' 4' 6' 8'
V(H)	2 4 6 8	1' 3' 5' 7'

The following alternative arrangement of polarization may be used by agreement between the administrations concerned:

	<i>Go</i>	<i>Return</i>
H(V)	1 3 5 7	1' 3' 5' 7'
V(H)	2 4 6 8	2' 4' 6' 8'

4. that, when common transmit-receive antennas for double polarization are used and not more than four channels are accommodated on a single antenna, it is preferred that the channel frequencies be selected by either making  $n = 1, 3, 5$  and  $7$  in both halves of the band or making  $n = 2, 4, 6$  and  $8$  in both halves of the band (see Note 2);
5. that, when additional radio-frequency channels, interleaved between those of the main pattern, are required, the values of the centre frequencies of these radio-frequency channels should be  $14.825$  MHz below those of the corresponding main channel frequencies; in systems for  $1\ 800$  channels, or the equivalent, and digital high capacity digital systems, it may not be practical, because of the bandwidth of the modulated carrier, to use interleaved frequencies;
6. that up to  $16$  go and return radio-frequency channels, each with a capacity of up to  $600$  telephone channels, may be obtained on the same route if the additional radio-frequency channels are used simultaneously, with those of the main pattern. Different polarizations should be used alternately for adjacent radio-frequency channels in the same half of the band (see Note 3);

7. that the preferred centre frequency is 6 175.0 MHz; other centre frequencies may be used by agreement between the administrations concerned.

*Note 1* – The radio-frequency arrangement shown in Fig. 1 is suitable for use with the preferred intermediate frequency of 70 MHz (see Recommendation 403). It is also suitable for use with an intermediate frequency of 74.12965 MHz, which enables a common oscillator (14.82593 MHz) to be used for generating all the local oscillations for the system, if desired.

*Note 2* – When common transmit-receive antennas are used and not more than four channels are accommodated on a single antenna, channel frequencies may be selected, by agreement between administrations, by making  $n = 1, 3, 5$  and  $7$  in the lower half of the band, and  $n = 2, 4, 6$  and  $8$  in the upper half of the band. If a second similar antenna is used for four further channels, the channel frequencies may be selected by making  $n = 2, 4, 6$  and  $8$  in the lower half of the band and  $n = 1, 3, 5$  and  $7$  in the upper half of the band, but if only three further channels are required, the channel frequencies may be selected by making  $n = 2, 4$  and  $6$  in the lower half of the band and  $n = 3, 5$  and  $7$  in the upper half of the band to avoid the difficulty of separating frequencies  $8$  and  $1'$ .

*Note 3* – The use of a single antenna working allows for seven go and seven return channels based on the preferred arrangement of polarization and eight go and eight return channels based on the alternative arrangement of polarization.

*Note 4* – The primary purpose of this Recommendation is to facilitate the international interconnection of high-capacity radio-relay systems. It should therefore be noted, that the use of both the main and interleaved arrangements of radio frequencies on a route would limit the provision of systems with a capacity of 1 800 telephone channels using analogue modulation or the equivalent and the provision of high capacity digital channels operating on that route.

*Note 5* – In the Russian Federation, a radio-frequency channel arrangement conforming to the scheme in Fig. 1 of Recommendation 497 is used in the frequency band 5 925-6 425 MHz and for systems with a capacity of 1 800 telephone channels, or the equivalent. The reference frequency  $f_0$  is then 6 172 MHz.

*Note 6* – It should be noted that some administrations use radio-frequency channel arrangement conforming to Recommendation 635 (the reference frequency of 4 200 MHz being replaced by 6 425 MHz) in the frequency band 5 925-6 425 MHz for high capacity digital radio-relay systems with a capacity of up to about 200 Mbit/s (see Annex 1).

*Note 7* – Actual bit rates including overhead may be as much as 5% or more higher than net transmission rates.

## ANNEX 1

### Frequency arrangements derived from a homogeneous frequency pattern for the 6 GHz band

Radio-frequency channel arrangements derived from Recommendation 635 for the 6 GHz band are described below.

#### 1. 90 MHz co-channel radio-frequency channel arrangements for the lower 6 GHz band


The radio channelling plans shown in Fig. 2, for the frequency band 5 850-6 425 MHz are based upon the use of 140 Mbit/s systems employing reduced bandwidth quaternary phase-shift keyed (RB 4-PSK) modulation.

#### 2. 60/80 MHz radio-frequency channel arrangements for the 6 GHz band

Table 1 describes radio-frequency channel arrangements for the band 5 925-6 425 MHz which are used for 16-QAM or 256-QAM systems. Further information on the applications given in Table 1 is given in Recommendation 635.

FIGURE 2

**Radio-frequency channel arrangements for the lower 6 GHz band**  
(All frequencies are in MHz)

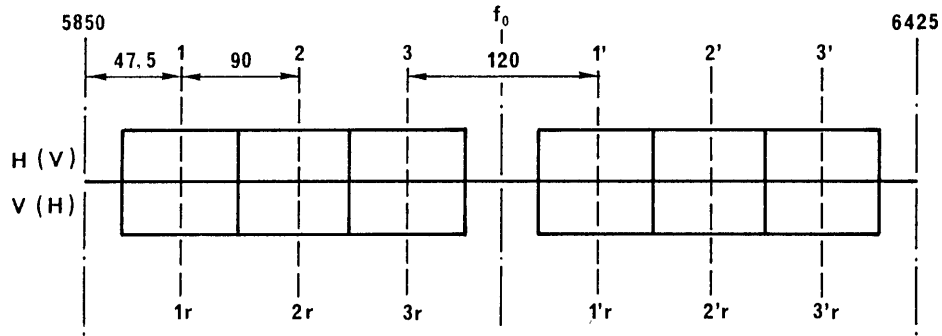

$f_0$  (centre frequency) = 6 137.5 MHz  
Symbol rate = 74 MBd  
 $X = 1.22$     $Y = 1.62$     $Z = 0.64$

D02-sc

TABLE 1

**Radio-frequency channel arrangements for the 6 GHz band**

Modulation (capacity per channel)	16-QAM (200 Mbit/s)	16-QAM (155.52 Mbit/s) 256-QAM (311.04 Mbit/s)	256-QAM (311.04 Mbit/s)
Frequency band (MHz)	5 925-6 425	5 925-6 425	5 925-6 425
Centre frequency of the band $f_0$ (MHz)	6 175	6 175	6 175
Centre frequency of the carriers $f_n$ (MHz)	$f_0 \pm (50 + 80 n)$ $n = 0, 1, 2$	$f_0 \pm 20 n$ $n = 1, 2, \dots, 12$	$f_0 \pm (15 + 10 n)$ $n = 0, 1, \dots, 23$
Interleaved or co-channel	Co-channel	Co-channel	Co-channel
Transmission method	Single carrier transmission method	3-carrier transmission method (20 MHz bandwidth/carrier)	6-carrier transmission method (10 MHz bandwidth/carrier)
Number of channels	6	8	8
Channel bandwidth $XS$ (MHz) $X$	80 1.6	60 1.54	60 1.54
Centre gap $YS$ (MHz) $Y$	100 2.0	80 2.06	80 2.06
Guard space $ZS$ (MHz) $Z$	40 0.8	30 0.77	30 0.77