

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**G.8272.1/Y.1367.1**

**Amendment 2**  
(08/2019)

SERIES G: TRANSMISSION SYSTEMS AND MEDIA,  
DIGITAL SYSTEMS AND NETWORKS

Packet over Transport aspects – Synchronization, quality  
and availability targets

SERIES Y: GLOBAL INFORMATION  
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS,  
NEXT-GENERATION NETWORKS, INTERNET OF  
THINGS AND SMART CITIES

Internet protocol aspects – Transport

---

Timing characteristics of enhanced primary  
reference time clocks

**Amendment 2**

Recommendation ITU-T G.8272.1/Y.1367.1 (2016) –  
Amendment 2

ITU-T G-SERIES RECOMMENDATIONS  
**TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS**

INTERNATIONAL TELEPHONE CONNECTIONS AND CIRCUITS	G.100–G.199
GENERAL CHARACTERISTICS COMMON TO ALL ANALOGUE CARRIER-TRANSMISSION SYSTEMS	G.200–G.299
INDIVIDUAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON METALLIC LINES	G.300–G.399
GENERAL CHARACTERISTICS OF INTERNATIONAL CARRIER TELEPHONE SYSTEMS ON RADIO-RELAY OR SATELLITE LINKS AND INTERCONNECTION WITH METALLIC LINES	G.400–G.449
COORDINATION OF RADIOTELEPHONY AND LINE TELEPHONY	G.450–G.499
TRANSMISSION MEDIA AND OPTICAL SYSTEMS CHARACTERISTICS	G.600–G.699
DIGITAL TERMINAL EQUIPMENTS	G.700–G.799
DIGITAL NETWORKS	G.800–G.899
DIGITAL SECTIONS AND DIGITAL LINE SYSTEM	G.900–G.999
MULTIMEDIA QUALITY OF SERVICE AND PERFORMANCE – GENERIC AND USER-RELATED ASPECTS	G.1000–G.1999
TRANSMISSION MEDIA CHARACTERISTICS	G.6000–G.6999
DATA OVER TRANSPORT – GENERIC ASPECTS	G.7000–G.7999
PACKET OVER TRANSPORT ASPECTS	G.8000–G.8999
Ethernet over Transport aspects	G.8000–G.8099
MPLS over Transport aspects	G.8100–G.8199
<b>Synchronization, quality and availability targets</b>	<b>G.8200–G.8299</b>
Service Management	G.8600–G.8699
ACCESS NETWORKS	G.9000–G.9999

*For further details, please refer to the list of ITU-T Recommendations.*

# Recommendation ITU-T G.8272.1/Y.1367.1

## Timing characteristics of enhanced primary reference time clocks

### Amendment 2

#### Summary

Recommendation ITU-T G.8272.1/Y.1367.1 specifies the requirements for enhanced primary reference time clocks (ePRTCs) suitable for time and phase synchronization in packet networks. It defines the error allowed at the time output of the ePRTC.

These requirements apply under the normal environmental conditions specified for the equipment.

Amendment 2 provides the following updates:

- Added case where ePRTC includes an integrated T-GM clock.

#### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T G.8272.1/Y.1367.1	2016-11-13	15	<a href="http://handle.itu.int/11.1002/1000/13162">11.1002/1000/13162</a>
1.1	ITU-T G.8272.1/Y.1367.1 (2016) Amd. 1	2017-08-13	15	<a href="http://handle.itu.int/11.1002/1000/13325">11.1002/1000/13325</a>
1.2	ITU-T G.8272.1/Y.1367.1 (2016) Amd. 2	2019-08-29	15	<a href="http://handle.itu.int/11.1002/1000/14014">11.1002/1000/14014</a>

#### Keywords

Frequency synchronization, phase synchronization, primary reference clock, time synchronization.

---

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2019

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	<b>Page</b>
1 Scope.....	1
2 References.....	1
3 Definitions .....	2
4 Abbreviations and acronyms .....	2
5 Conventions .....	2
6 Time error, wander and jitter in locked mode .....	2
6.1 Time error in locked mode .....	3
6.2 Wander in locked mode.....	3
6.3 Jitter .....	5
7 Phase discontinuity .....	6
8 Transient response and holdover performance .....	6
8.1 Transient between time locked and frequency reference locked.....	6
8.2 Phase/time holdover based on local frequency reference during loss of phase/time input.....	6
9 Interfaces.....	7
9.1 Phase and time interfaces .....	7
9.2 Frequency interfaces.....	8
Annex A – ePRTC autonomous primary reference clock requirements.....	9
Appendix I – ePRTC functional model.....	10
Appendix II – ePRTC holdover model .....	12
II.1 General clock model.....	12
II.2 Ideal holdover model .....	12
II.3 ePRTC holdover performance characterization .....	13
Bibliography.....	15



# Recommendation ITU-T G.8272.1/Y.1367.1

## Timing characteristics of enhanced primary reference time clocks

### Amendment 2

*Editorial note: This is a complete-text publication. Modifications introduced by this amendment are shown in revision marks relative to Recommendation ITU-T G.8272.1/Y.1367.1 (2016) plus its Amd.1 (2017).*

#### 1 Scope

This Recommendation specifies the requirements for enhanced primary reference time clocks (ePRTCs) suitable for time, phase and frequency synchronization in packet networks. These requirements apply under the normal environmental conditions specified for the equipment.

The ePRTC provides a reference time signal traceable to a recognized time standard (e.g., coordinated universal time (UTC)) and also a frequency reference. Compared to the primary reference time clock (PRTC) as defined in [ITU-T G.8272], the ePRTC is subject to more stringent output performance requirements and includes a frequency input directly from an autonomous primary reference clock. The performance of the autonomous primary reference clock for this particular application is specified in Annex A.

An ePRTC provides the reference signal for time, phase, and frequency synchronization for clocks within a network or section of a network. In particular, the ePRTC can also provide the reference signal to the telecom grand master (T-GM) within the network node where the ePRTC is located.

This Recommendation defines the ePRTC output requirements, including the ePRTC integrated with a T-GM clock. The requirements for the ePRTC integrated with a T-GM clock are for further study.

#### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T G.703] Recommendation ITU-T G.703 (2016), *Physical/electrical characteristics of hierarchical digital interfaces.*
- [ITU-T G.810] Recommendation ITU-T G.810 (1996), *Definitions and terminology for synchronization networks.*
- [ITU-T G.811] Recommendation ITU-T G.811 (1997), *Timing characteristics of primary reference clocks.*
- [ITU-T G.811.1] Recommendation ITU-T G.811.1 (2017), *Enhanced primary reference clock.*
- [ITU-T G.8260] Recommendation ITU-T G.8260 (2015), *Definitions and terminology for synchronization in packet networks.*
- [ITU-T G.8271] Recommendation ITU-T G.8271/Y.1366 (~~2016~~2017), *Time and phase synchronization aspects of packet networks.*

[ITU-T G.8272] Recommendation ITU-T G.8272/Y.1367 (~~2015~~2018), *Timing characteristics of primary reference time clocks*.

### 3 Definitions

Definitions related to synchronization are contained in [ITU-T G.810] and [ITU-T G.8260].

### 4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

ePRTC	Enhanced Primary Reference Time Clock
FM	Frequency Modulation
GNSS	Global Navigation Satellite System
MTIE	Maximum Time Interval Error
NE	Network Equipment
PPS	Pulse Per Second
PRC	Primary Reference Clock
PRTC	Primary Reference Time Clock
PTP	Precision Time Protocol
SSU	Synchronization Supply Unit
T-GM	Telecom Grand Master
TDEV	Time Deviation
UTC	Coordinated Universal Time

### 5 Conventions

None.

### 6 Time error, wander and jitter in locked mode

The noise generation of an ePRTC is characterized by two main aspects:

- 1) the constant time error (time offset) at its output compared to the applicable primary time standard (e.g., UTC);
- 2) the amount of phase error (wander and jitter) produced at its output.

For characterization of the second aspect described above (phase error) the calculation of the maximum time interval error (MTIE) and the time deviation (TDEV) is useful.

Clause 6.1 defines the time error requirements applicable at the output of the ePRTC, which correspond to the combination of the two aspects described above (constant time error and phase error). No requirement is defined for the constant time error component taken alone, only when it is combined with the phase error.

Clauses 6.2 and 6.3 define the wander and jitter requirements applicable at the output of the ePRTC, which correspond to the second aspect described above (phase error).

~~The performance of the output of the combined ePRTC and T-GM function is for further study.~~



The performance specified in clauses 6.1 and 6.2 also applies to the output of the combined ePRTC and T-GM function when integrated into a single piece of equipment. Therefore, there is no additional allowance for the inclusion of the T-GM function.

NOTE – Optimization of the noise inside the equipment is possible by combining the two functions. Therefore, the total noise of equipment that integrates the ePRTC and T-GM can be the same as equipment that only contains the ePRTC.

## 6.1 Time error in locked mode

Under normal, locked operating conditions, the time output of the ePRTC, or the combined ePRTC and T-GM function, should be accurate to within 30 ns or better when verified against the applicable primary time standard (e.g., UTC). For the ePRTC this value includes all the noise components, i.e., the constant time error (time offset) and the phase error (wander and jitter) of the ePRTC. ~~The combined ePRTC and T-GM function is for further study.~~

For the combined ePRTC and T-GM function, the time error samples are measured through a moving-average low-pass filter of at least 100 consecutive time error samples. This filter is applied by the test equipment to remove errors caused by timestamp quantization, or any quantization of packet position in the test equipment, before calculating the maximum time error.

Normal, locked operating conditions mean that:

- the ePRTC is fully locked to the incoming reference time signal, and is not operating in warm-up;
- there are no failures or facility errors in the reference path, including but not limited to antenna failures;
- the environmental conditions are within the operating limits specified for the equipment;
- the equipment is properly commissioned and calibrated for fixed offsets such as antenna cable length, cable amplifiers and receiver delays;
- the reference time signal (e.g., global navigation satellite system (GNSS) signal) is operating within limits, as determined by the relevant operating authorities;
- if the reference time signal is operated over a radio system such as GNSS, multipath reflections and interference from other local transmissions, such as jamming, must be minimized to an acceptable level;
- there are no extreme propagation anomalies, such as severe thunderstorms or solar flares.

## 6.2 Wander in locked mode


The wander requirements apply to all the interfaces listed in clause 9.2.2.

When the ePRTC is in the normal, locked mode of operation, the wander, expressed in MTIE, measured using a similar configuration as the synchronized clock configuration defined in Figure 1a of [ITU-T G.810] (with the use of a time standard instead of a frequency standard), should have the following limits shown in Table 1:

**Table 1 – Wander generation (MTIE)**

MTIE limit (ns)	Observation interval $\tau$ (s)
4	$0.1 < \tau \leq 1$
$0.11114 \times \tau + 3.89$	$1 < \tau \leq 100$
$0.0375 \times 10^{-3} \tau + 15$	$100 < \tau \leq 400,000$
30	$\tau > 400,000$

The resultant requirements are shown in Figure 1.

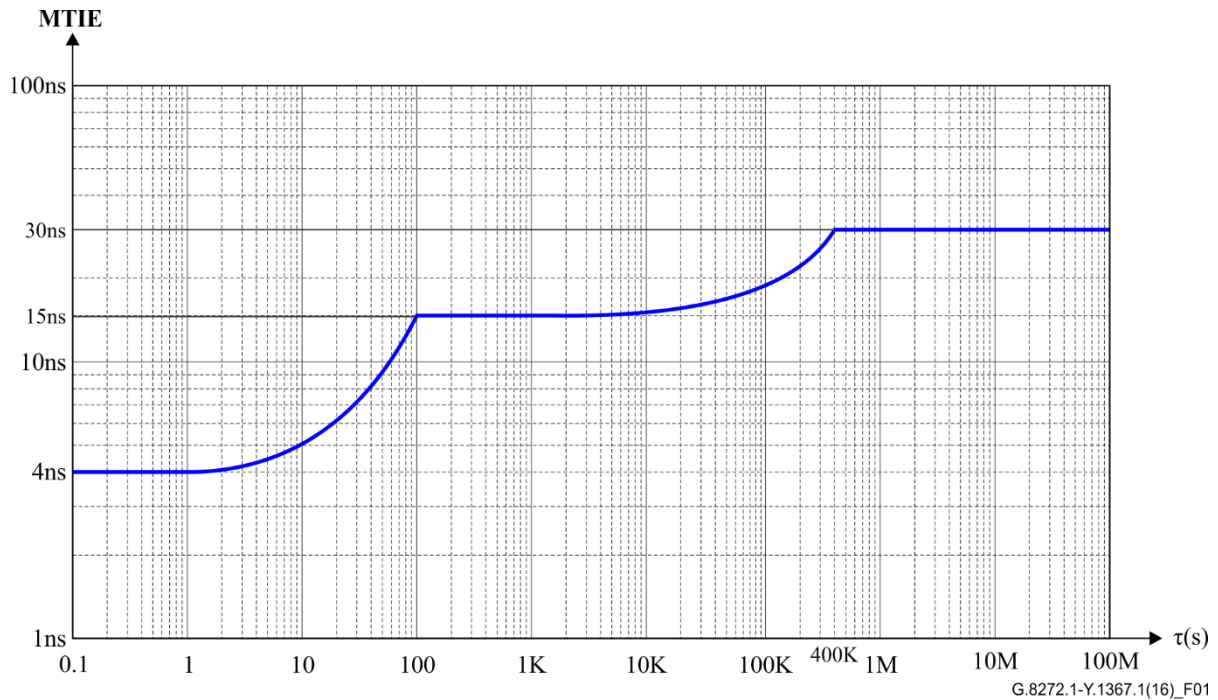

**Figure 1 – MTIE as a function of an observation (integration) interval  $\tau$**


NOTE 1 – For the 1 pulse per second (PPS) output interface, the MTIE mask is applicable for observation intervals greater than or equal to 1 second.

When the ePRTC is in the normal, locked mode of operation, the wander, expressed in TDEV, measured using a similar configuration as the synchronized clock configuration defined in Figure 1a of [ITU-T G.810] (with the use of a time standard instead of a frequency standard), should have the following limits shown in Table 2:

**Table 2 – Wander generation (TDEV)**

TDEV limit (ns)	Observation interval $\tau$ (s)
1	$0.1 < \tau \leq 30,000$
$3.33333 \times 10^{-5} \tau$	$30,000 < \tau \leq 300,000$
10	$300,000 < \tau < 1,000,000$

The resultant requirements are shown in Figure 2.

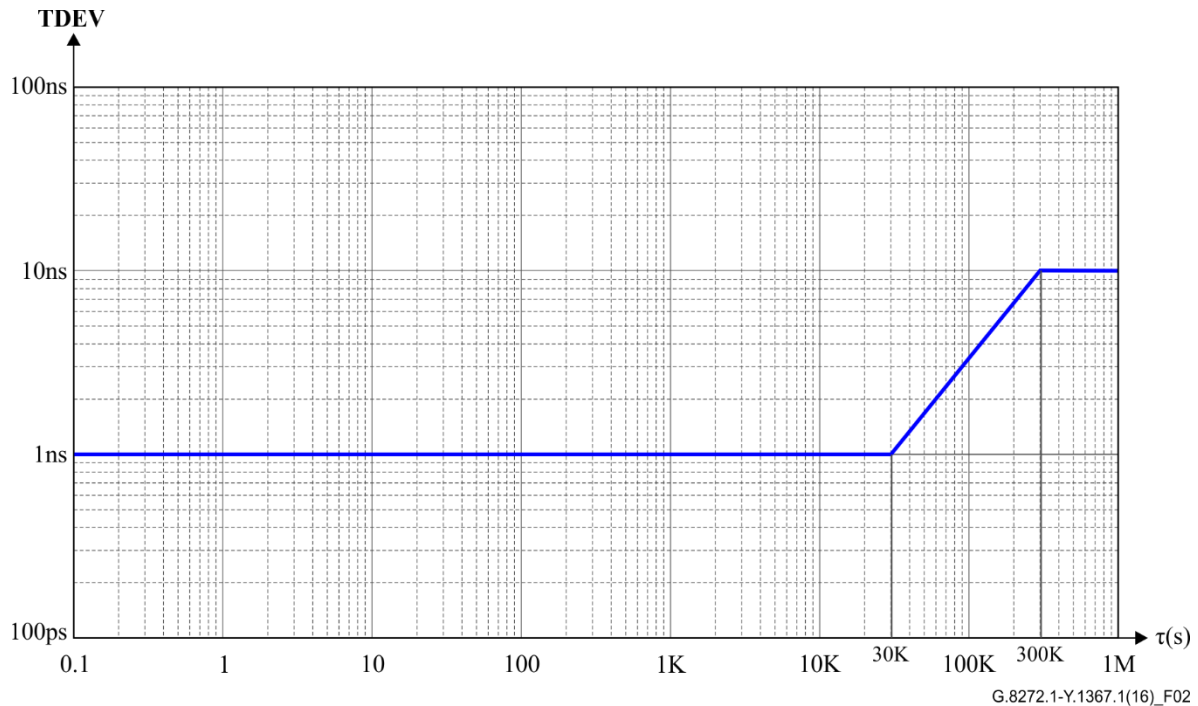

**Figure 2 – TDEV as a function of an observation (integration) interval  $\tau$**

NOTE 2 – For the 1 PPS output interface, the TDEV mask is applicable for observation intervals greater than or equal to 1 second.

The applicable MTIE and TDEV requirements for the 1 PPS output interfaces are based on the time interval error of the 1 PPS signal taken at one sample per second and without any low-pass filtering.

The applicable MTIE and TDEV requirements for synchronous Ethernet, 2048 kHz, 2048 kbit/s and 1544 kbit/s output interfaces are measured through an equivalent 10 Hz, first-order, low-pass measurement filter, at a maximum sampling time  $\tau_0$  of 1/30 seconds.

~~The applicable MTIE and TDEV requirements for an Ethernet interface carrying precision time protocol (PTP) messages are for further study.~~

The applicable MTIE and TDEV requirements for an Ethernet interface carrying PTP messages are measured through a moving-average low-pass filter of at least 100 consecutive time error samples. This filter is applied by the test equipment to remove errors caused by timestamp quantization, or any quantization of packet position in the test equipment, before calculating the MTIE and TDEV.

The minimum measurement period for TDEV is twelve times the integration period ( $T = 12\tau$ ).

NOTE 3 – In the case of PTP, a sample is a single estimate of 2-way time error, calculated by combining the packets in forward and reverse directions. It is calculated by the test equipment measuring the difference between the time from the PRTC and the reference time. As an example, according to [b-ITU-T G.8275.1] the PTP message rate is 16 packets/second in each direction; therefore, there are 16 samples per second, calculated by combining a pair of packets in each direction.

## 6.3 Jitter

### 6.3.1 Output port jitter

While most specifications in this Recommendation are independent of the output interface at which they are measured, this is not the case for jitter generation. Jitter generation specifications must utilize existing specifications that are currently specified differently for different interfaces. These requirements are stated separately for some of the interfaces identified in clause 9.

The applicable jitter requirements for 2048 kHz, 2048 kbit/s, 1544 kbit/s, and 10 MHz output interfaces are defined in [ITU-T G.811].

The intrinsic jitter for the other interfaces identified in clause 9 is for further study.

### 6.3.2 Input port jitter tolerance

The 10 MHz input interface should tolerate jitter as defined by [ITU-T G.811] for the 10 MHz output interface.

The jitter tolerance for the other interfaces identified in clause 9 is for further study.

## 7 Phase discontinuity

The phase discontinuity for an ePRTC is for further study.

## 8 Transient response and holdover performance

### 8.1 Transient between time locked and frequency reference locked

For the transition from time locked to frequency reference locked, the MTIE mask in clause 6.2 applies for a period up to 900 seconds.

The transition from frequency reference locked to time locked is for further study.

### 8.2 Phase/time holdover based on local frequency reference during loss of phase/time input

When an ePRTC loses all its input phase and time references, it enters the phase/time holdover state. Under these circumstances, the ePRTC will rely on an autonomous primary reference clock (PRC) frequency reference input.

The phase/time holdover requirement bounds the maximum excursions in the output timing signal. Additionally, it restricts the accumulation of the phase movement during input signal impairments or internal disturbances.

For the ePRTC-A, the holdover requirements are as follows:


- from the start of phase/time holdover, after 30 days of continuous normal operation, the time output of the ePRTC should be accurate, when verified against the applicable primary time standard (e.g., UTC), to within a value increasing linearly from 30 ns to 100 ns over a 14-day period, as defined in Table 3 and shown in Figure 3.

For the ePRTC-B, a higher-performance ePRTC, the holdover requirements are as follows:

- for further study.

**Table 3 – ePRTC phase/time holdover requirements**

	Time $t$ (s)	Time error $\Delta x(t)$ (ns)
ePRTC-A	$0 < t \leq 1,209,600$ (14 days)	$ \Delta x(t)  \leq 30 + 5.787037 \times 10^{-5} t$
ePRTC-B	For further study	For further study
NOTE – $t=0$ represents the start of holdover.		

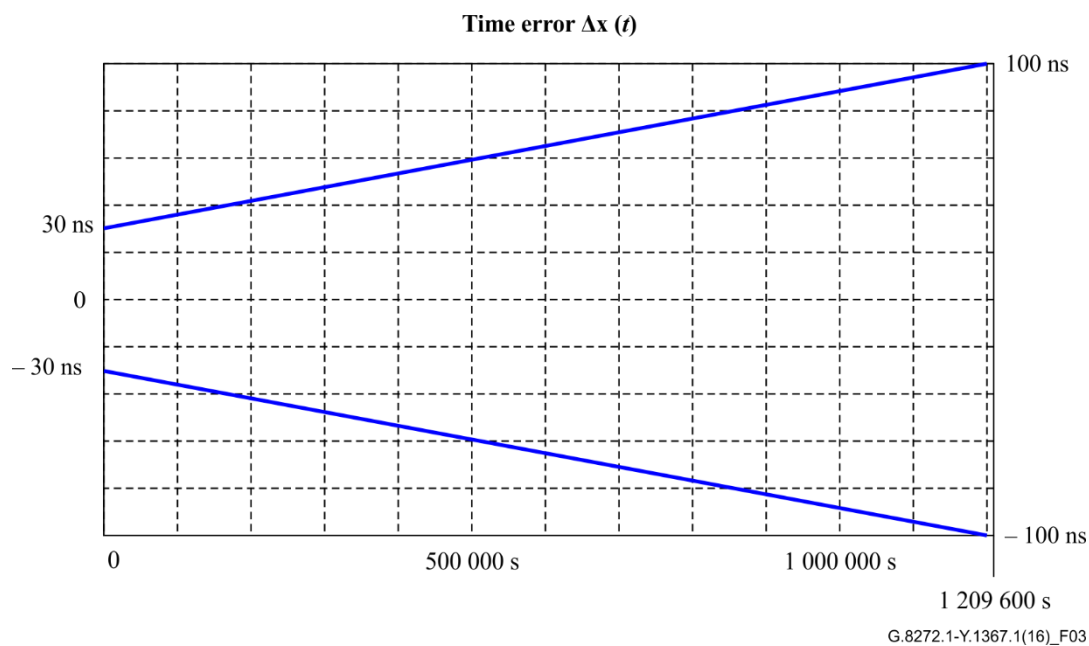

**Figure 3 – ePRTC-A phase/time holdover requirements**

NOTE – Additional background information on these ePRTC holdover requirements is included in Appendix II.

## 9 Interfaces

The requirements in this Recommendation are related to reference points that may be internal to the equipment or network equipment (NE) in which the ePRTC is embedded and are, therefore, not necessarily available for measurement or analysis by the user. Consequently, the performance of the ePRTC is not specified at these internal reference points, but rather at the external interfaces of the equipment.

Note that not all of the interfaces below need to be implemented on all equipment.

### 9.1 Phase and time interfaces

The output phase and time interfaces specified for the equipment in which the ePRTC may be contained are:

- ITU-T V.11-based time/phase distribution interface, as defined in [ITU-T G.703] and [ITU-T G.8271];

For the ePRTC ITU-T V.11-based time/phase distribution interface, it is necessary to limit cable length to 5 m or less and a high-quality cable should be used. The following requirements apply:

- The 1 PPS signal generation accuracy of the timing master tolerance is  $\pm 4$  ns
- The cable delay compensation accuracy tolerance is  $\pm 2$  ns
- The 1 PPS signal detection accuracy at the slave tolerance is  $\pm 4$  ns
- 1 PPS 50  $\Omega$  phase-synchronization measurement interface, as defined in [ITU-T G.703] and [ITU-T G.8271];

- [Ethernet interface carrying PTP messages;](#)

[NOTE – Ethernet interfaces can combine synchronous Ethernet for frequency and PTP messages.](#)

- other interfaces are for further study.

## 9.2 Frequency interfaces

In addition to phase and time interfaces, frequency interfaces are used.

### 9.2.1 Inputs

At least one input frequency interface must be provided from an autonomous primary reference clock. The input frequency interfaces specified for the equipment in which the ePRTC may be contained are:

- 2048 kHz interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein (see Note);
- 2048 kbit/s interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein (see Note);
- 10 MHz interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- other interfaces are for further study.

Performance requirements of the autonomous primary reference clock are given in Annex A.

NOTE – The requirements for jitter for the 2 048 kHz and 2 048 kbit/s interfaces need to be tighter than what is defined in [ITU-T G.703] and [ITU-T G.811] to meet the ePRTC requirements. The exact values are for further study.

### 9.2.2 Outputs

At least one output frequency interface must be provided. The output frequency interfaces specified for the equipment in which the ePRTC may be contained are:

- 2048 kHz interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- 1544 kbit/s interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- 2048 kbit/s interfaces according to [ITU-T G.703] with additional jitter and wander requirements as specified herein;
- synchronous Ethernet interfaces;
- ITU-T V.11-based time/phase distribution interface, as defined in [ITU-T G.703] and [ITU-T G.8271];
- 1 PPS 50  $\Omega$  phase-synchronization measurement interface, as defined in [ITU-T G.703] and [ITU-T G.8271];
- 10 MHz interfaces according to [ITU-T G.703]; with additional jitter and wander requirements as specified herein;
- other interfaces are for further study.

## **Annex A**

### **ePRTC autonomous primary reference clock requirements**

(This annex forms an integral part of this Recommendation.)

Performance requirements for the ePRTC autonomous primary reference clock are described in [ITU-T G.811.1], the Recommendation defining the enhanced PRC (ePRC).

NOTE – Clarifying the term "autonomous" in the context of this document, a cesium atomic clock is an example of an autonomous primary reference clock. A GNSS timing receiver, on the other hand, is not an example of an autonomous primary reference clock, as it relies on external signals for establishing precise time and frequency.


# Appendix I

## ePRTC functional model

(This appendix does not form an integral part of this Recommendation.)

A simplified model of the ePRTC is provided in this appendix to describe its functionality and to define the various interfaces and functions that collectively define an ePRTC.

Figure I.1 represents a functional model and it is not intended to specify any specific implementation.

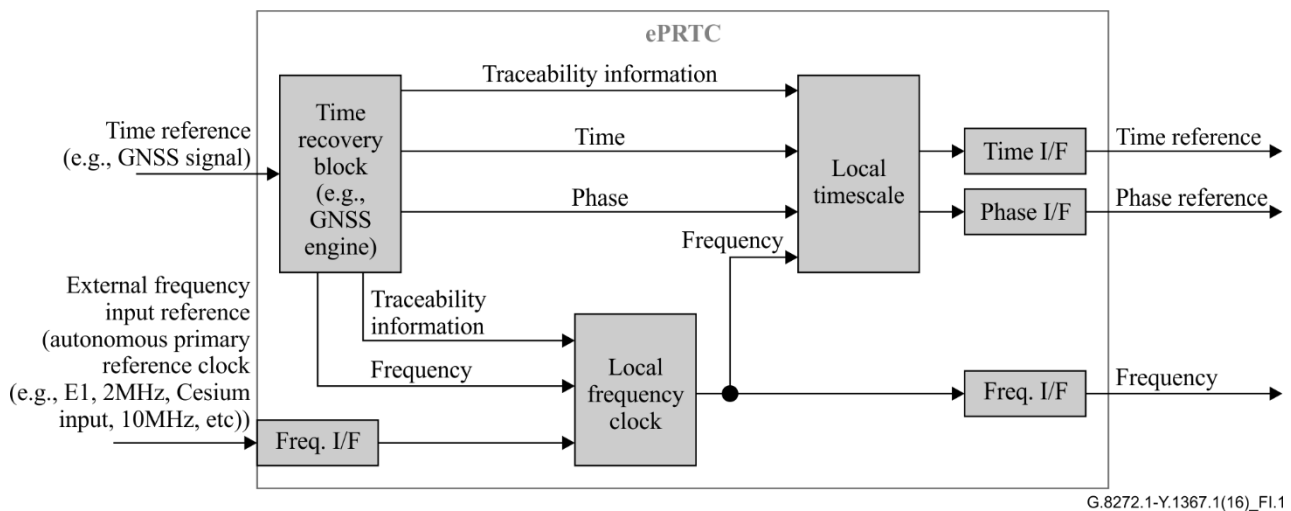

**Figure I.1 – ePRTC functional model**

NOTE – The output interfaces shown in Figure I.1 correspond to logical interfaces; in some ePRTC implementations, the time logical interface and the phase logical interface may be merged into the same phase/time physical interface. In addition to the time reference, the time logical interface may carry associated information on the traceability of the reference.

The main function of an ePRTC is to deliver a primary time reference to be used in time and/or phase synchronization of other clocks of the network.

An ePRTC receives a time reference from a system having access to a recognized primary time standard (e.g., from a global navigation satellite system or from a national laboratory participating in time standards generation) and delivers this reference signal to other clocks within a network or section of a network.

The main difference between the PRTC and the ePRTC is the input from an external autonomous primary reference clock (e.g., cesium clock). Therefore, an ePRTC includes an external input frequency interface and it must also implement at least one output frequency interface. The ePRTC can also include multiple input frequency references used to ensemble a very stable frequency reference. A possible use of the output frequency interface may be to measure the phase error of the ePRTC, using traditional telecom signals.

Finally, the ePRTC may also deliver traceability information, reflecting the status of the clock (i.e., locked on its input reference signal, in holdover). The details of this traceability information are for further study.

The functionality of the ePRTC is defined based on the individual blocks in Figure I.1. A description of the functions is provided in Table I.1. Note that the specific grouping of the functions is for description only and is not intended to specify how the ePRTC may be implemented.



**Table I.1 – ePRTC functions**

<b>Time recovery</b>	Receives and processes the external time interface (e.g., from GNSS antenna). Provides output signals to generate frequency, phase and time. Provides traceability information.
<b>Local frequency clock</b>	The "Local frequency clock" generates the internally-used frequency timing signals. It synchronizes to an autonomous primary reference clock input (e.g., E1, 2048 kHz, 10 MHz). The output of the "Local frequency clock" provides a reference to the "Local timescale generation" block.
<b>Local timescale</b>	Maintains the local representation of the primary timescale, based on the frequency generated by the local frequency clock. This block also generates the time and phase reference output signals.
<b>I/F</b>	Interface function necessary to generate a physical signal.

## Appendix II

### ePRTC holdover model

(This appendix does not form an integral part of this Recommendation.)

#### II.1 General clock model

The methodology to evaluate the holdover performance is based on the well-established clock model [b-Sullivan-1990], [b-Bregni-2002]. The clock model provides a well-defined relationship between the fundamental attributes of a clock and the time error performance capabilities of the clock.

When both the deterministic and stochastic components are included the general time error accumulation governing equation is:

$$x(n\tau_0) = \sum_{j=0}^2 c_j (n\tau_0)^j + \varphi_x(n\tau_0) \quad (\text{II-1})$$

where  $c_0=a_0$ ,  $c_1=y_0$ ,  $c_2=1/2d$ , and the TDEV of the stochastic components is:

$$\sigma_\varphi(\tau) = \left[ \sum_{i=1}^3 e_i(\tau)^i \right]^{1/2} \quad (\text{II-2})$$

Summarizing each term based on the index  $i$  (the index  $j$  corresponds to the index  $i$  divided by 2 when  $i$  is even):

- $i=0$ : Initial time offset at start of holdover (limited by initial time error during normal tracking; not applicable to stability)
- $i=1$ : Contribution from the white frequency modulation (FM) noise component ( $\tau^{1/2}$  TDEV dependence for the time accumulation process)
- $i=2$ : Linear time error accumulation associated with the initial frequency offset and the flicker noise FM component
- $i=3$ : Contribution from the random walk FM noise component ( $\tau^{3/2}$  TDEV dependence for the time accumulation process). Note this is usually insignificant for atomic clocks used in ePRTC applications)
- $i=4$ : Contribution associated with drift in the clock and flicker walk FM ( $\tau^2$  component of TDEV, which is not relevant for atomic clocks used in ePRTC applications; because of this, it is not included in equation (II-2)).

#### II.2 Ideal holdover model

In applying the general clock model to the ePRTC, the first observation is that in an ideal case, the deterministic clock state components (clock phase, clock frequency and clock drift) could be known perfectly. It is useful to see how well an atomic clock can maintain timekeeping in two steps, the first described here in clause II.2 and the second described in clause II.3.


The ideal holdover performance is considered, as this is the performance limitation of the clocks themselves. The results in this section show the ideal timekeeping capability, as examples, of three types of atomic clocks:

- 1) ePRC-A;
- 2) ePRC-B;

### 3) ePRC-C.

The term ePRC is an acronym for "enhanced PRC", which performs at least at the level of the PRC defined in Annex A. The ideal holdover performance of such clocks is limited by the intrinsic noise performance. For example, the flicker FM noise floor (i.e., the minimum value of MDEV) for a standard cesium tube clock (ePRC-A example) is typically  $1.5e-14$ , while a high performance cesium tube clock (ePRC-B example) flicker FM noise floor is typically 3 times better ( $5e-15$ ). An atomic clock based on Ytterbium cold ion microwave technology (ePRC-C example), represents a significant improvement over high-performance cesium, with a tenfold improvement in intrinsic noise performance (flicker noise typically better than  $5e-16$ ).

The two graphs (one at a 30-day scale and another at a 300-day scale) contained in Figure II.1 show the accumulated time error performance, i.e., TDEV, for six example cases: (1) one ePRC-A (blue), (2) dual ensemble of ePRC-A (red), (3) one ePRC-B (green), (4) dual ensemble of ePRC-B (purple), (5) one ePRC-C (light blue) and (6) dual ensemble of e-PRC-C (orange). In each case, ensembling shows performance improvement.

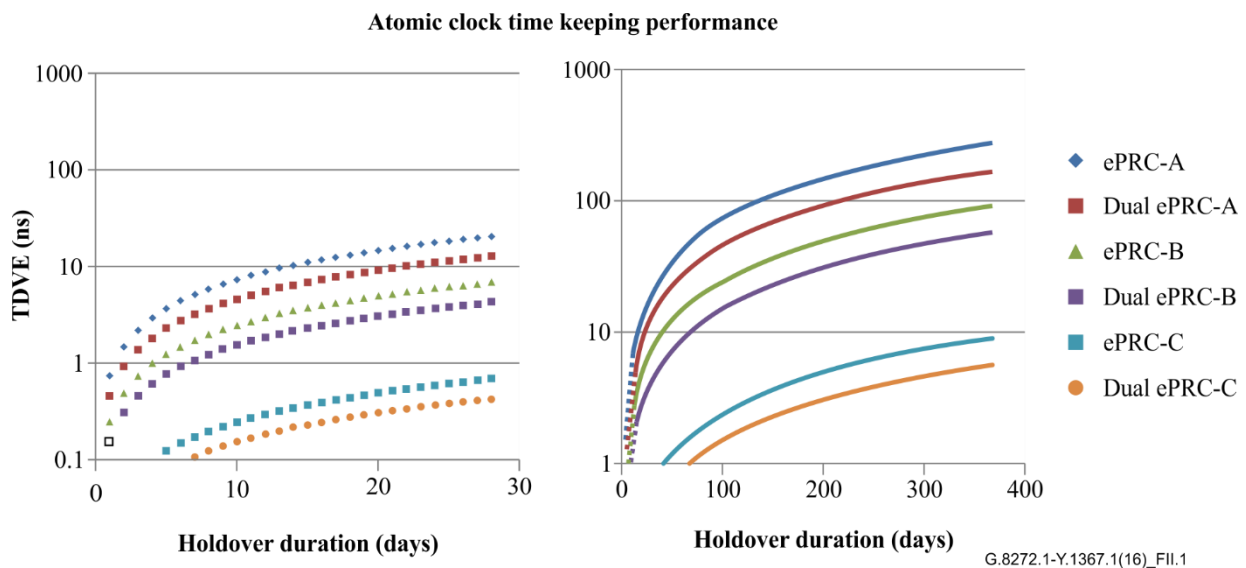

**Figure II.1 – Atomic clock time keeping (30-day and 300-day scales)**

### II.3 ePRTC holdover performance characterization

A key capability of an ePRTC is the capability to maintain normal timing performance during extended GNSS outage events. Such events can be the results of maintenance, equipment failure, or intentional or unintentional jamming.

The results summarized below are based on a complete simulation of an ePRTC based on these three components:


- 1) intrinsic noise of the clock – The deterministic and stochastic components of the clock model described above;
- 2) GNSS reference noise – The simulation model includes the receiver noise as well as a diurnal model of ionospheric delay;
- 3) measurement noise – A small component associated with the performance of a well-designed ePRTC system.

The simulation models one particular ePRTC clock algorithm. At the core of all clock algorithms is the behaviour that the short-term noise is dominated by the clock performance and the long-term noise is dominated by the reference performance. A well-designed filter algorithm will mitigate noise peaking in the response.

For an ePRTC with multiple atomic clock inputs, an ensembling function is also required. Also, dynamic filtering performance is required to address non-steady conditions such as start-up and clock outages. The internal characteristics of the filtering algorithm are beyond the scope of the ePRTC standard. This example is provided to show the holdover performance obtainable with ePRTC technology.

The graph below in Figure II.2 shows the performance of ePRTC systems for a 14-day GNSS outage when operating with different alternative local atomic clocks. The graph includes six examples as before: single/dual standard performance cesium, single/dual high performance cesium and single/dual next generation atomic clock.

This illustrates the key capability of an ePRTC to support outages beyond several days without serious time keeping degradation. This time error is constrained to be better than a PRTC for a minimum outage period of two weeks. Such events can be the results of maintenance, equipment failure or intentional or unintentional jamming. All example clocks meet the ePRTC holdover requirement from clause 8.2, which is shown with the solid red lines, by a comfortable margin.

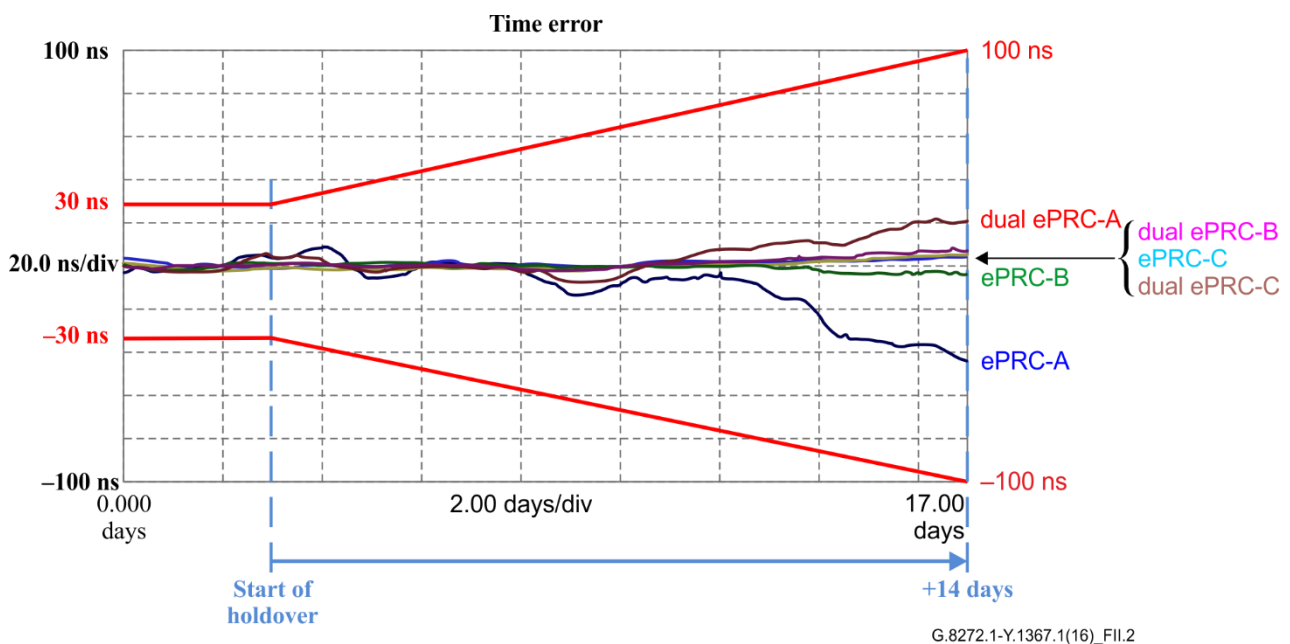

**Figure II.2 – Atomic clock 14-day holdover (starts after three days)**

## Bibliography

- [b-ITU-T G.8273] Recommendation ITU-T G.8273/Y.1368 (~~2013~~2018), *Framework of phase and time clocks*.
- [\[b-ITU-T G.8275.1\]](#) [Recommendation ITU-T G.8275.1/Y.1369.1 \(2016\), \*Precision time protocol telecom profile for phase/time synchronization with full timing support from the network\*](#).
- [b-Bregni-2002] Stefano Bregni (2002), *Synchronization of Digital Telecommunications Networks*, Wiley.
- [b-Sullivan-1990] D.B. Sullivan, D.W. Allan, D.A. Howe and F.L. Walls (1990), *Characterization of Clocks and Oscillators*, NIST Technical Note 1337, March.

ITU-T Y-SERIES RECOMMENDATIONS

**GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS, NEXT-GENERATION NETWORKS, INTERNET OF THINGS AND SMART CITIES**

<b>GLOBAL INFORMATION INFRASTRUCTURE</b>	
General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899
<b>INTERNET PROTOCOL ASPECTS</b>	
General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299
<b>Transport</b>	<b>Y.1300–Y.1399</b>
Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
IPTV over NGN	Y.1900–Y.1999
<b>NEXT GENERATION NETWORKS</b>	
Frameworks and functional architecture models	Y.2000–Y.2099
Quality of Service and performance	Y.2100–Y.2199
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Enhancements to NGN	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Network control architectures and protocols	Y.2500–Y.2599
Packet-based Networks	Y.2600–Y.2699
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899
Carrier grade open environment	Y.2900–Y.2999
<b>FUTURE NETWORKS</b>	<b>Y.3000–Y.3499</b>
<b>CLOUD COMPUTING</b>	<b>Y.3500–Y.3999</b>
<b>INTERNET OF THINGS AND SMART CITIES AND COMMUNITIES</b>	
General	Y.4000–Y.4049
Definitions and terminologies	Y.4050–Y.4099
Requirements and use cases	Y.4100–Y.4249
Infrastructure, connectivity and networks	Y.4250–Y.4399
Frameworks, architectures and protocols	Y.4400–Y.4549
Services, applications, computation and data processing	Y.4550–Y.4699
Management, control and performance	Y.4700–Y.4799
Identification and security	Y.4800–Y.4899
Evaluation and assessment	Y.4900–Y.4999

*For further details, please refer to the list of ITU-T Recommendations.*



## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
<b>Series G</b>	<b>Transmission systems and media, digital systems and networks</b>
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
Series Z	Languages and general software aspects for telecommunication systems