

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

L.314

(11/2018)

SERIES L: ENVIRONMENT AND ICTS, CLIMATE
CHANGE, E-WASTE, ENERGY EFFICIENCY;
CONSTRUCTION, INSTALLATION AND PROTECTION
OF CABLES AND OTHER ELEMENTS OF OUTSIDE
PLANT

Maintenance and operation – Optical fibre cable
maintenance

**Optical fibre identification for the maintenance
of optical access networks**

Recommendation ITU-T L.314

ITU-T L-SERIES RECOMMENDATIONS

**ENVIRONMENT AND ICTS, CLIMATE CHANGE, E-WASTE, ENERGY EFFICIENCY; CONSTRUCTION,
INSTALLATION AND PROTECTION OF CABLES AND OTHER ELEMENTS OF OUTSIDE PLANT**

OPTICAL FIBRE CABLES	
Cable structure and characteristics	L.100–L.124
Cable evaluation	L.125–L.149
Guidance and installation technique	L.150–L.199
OPTICAL INFRASTRUCTURES	
Infrastructure including node elements (except cables)	L.200–L.249
General aspects and network design	L.250–L.299
MAINTENANCE AND OPERATION	
Optical fibre cable maintenance	L.300–L.329
Infrastructure maintenance	L.330–L.349
Operation support and infrastructure management	L.350–L.379
Disaster management	L.380–L.399
PASSIVE OPTICAL DEVICES	L.400–L.429
MARINIZED TERRESTRIAL CABLES	L.430–L.449

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T L.314

Optical fibre identification for the maintenance of optical access networks

Summary

Recommendation ITU-T L.314 deals with important considerations related to the requirements of an optical fibre identification technique based on the detection of leaky light waves, and which is to be used for construction and maintenance work in optical access networks.

History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T L.314/L.85	2010-07-29	15	11.1002/1000/10918
2.0	ITU-T L.314	2018-11-29	15	11.1002/1000/13787

Keywords

Fibre identification, live fibre detection, non-destructive macrobending, optical access network.

* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2019

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope	1
2 References	1
3 Definitions	2
3.1 Terms defined elsewhere	2
3.2 Terms defined in this Recommendation	2
4 Abbreviations and acronyms	2
5 Conventions	2
6 Fundamental requirements for optical fibre identification.....	2
7 Measurement methods and procedures	3
7.1 Measurement method	3
7.2 Applicable areas	4
7.3 Fibre types.....	4
7.4 Cable types.....	4
8 Requirements for in-service fibre line identification	4
8.1 Optical performance	4
8.2 Test light wavelength.....	5
8.3 Requirement for in-service monitoring and identification equipment	5
8.4 Detection of the communication light	5
Appendix I – Japanese experience – Optical fibre identification technology in Japan	6
I.1 Introduction.....	6
I.2 Configuration	6
I.3 Procedure for optical fibre identification.....	6
I.4 Design of the optical fibre identifier	7
I.5 Applicable areas and cable types	7
Appendix II – Chinese experience – Optical fibre identification technology in China.....	9
II.1 Introduction.....	9
II.2 Configuration	9
II.3 Applicable areas	9
II.4 Fibre types and cables.....	10
II.6 Optical performance	10
Bibliography	11

Introduction

The demand for broadband access services has increased throughout the world in the recent years. The number of FTTx and mobile subscribers is increasing rapidly, and a large number of optical fibre cables are being installed daily to meet the current demand. During the installation and maintenance of optical fibre communication networks, field engineers must first correctly identify a specific fibre from a bundle of fibres to avoid the incorrect cutting and/or connection of an optical fibre at a worksite. In particular, engineers should distinguish "live" (signal-carrying) and all dark fibres, since service reliability must be maintained. Therefore, it is very important to employ optical tests that distinguish a fibre for identification in an in-service optical fibre cable with no degradation in transmission quality even if the field engineer selects the wrong fibre.

Recommendation ITU-T L.314

Optical fibre identification for the maintenance of optical access networks

1 Scope

This Recommendation:

- describes functional requirements and methods for optical fibre identification for the construction and maintenance of optical access networks;
- deals with an optical fibre identification technique that functions by measuring certain optical characteristics. It also considers the procedures and requirements for optical fibre identification, including in-service fibre lines, without interfering with optical communication signals in access networks;
- describes the optical fibre identification technology that can be applied to different topologies of optical access networks.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- | | |
|------------------|--|
| [ITU-T G.652] | Recommendation ITU-T G.652 (2016), <i>Characteristics of a single-mode optical fibre and cable.</i> |
| [ITU-T G.657] | Recommendation ITU-T G.657 (2016), <i>Characteristics of a bending-loss insensitive single-mode optical fibre and cable.</i> |
| [ITU-T G.671] | Recommendation ITU-T G.671 (2012), <i>Transmission characteristics of optical components and subsystems.</i> |
| [ITU-T G.984.1] | Recommendation ITU-T G.984.1 (2008), <i>Gigabit-capable passive optical networks (GPON): General characteristics.</i> |
| [ITU-T G.987.1] | Recommendation ITU-T G.987.1 (2016), <i>10-Gigabit-capable passive optical networks (XG-PON): General requirements.</i> |
| [ITU-T G.9807.1] | Recommendation ITU-T G.9807.1 (2016), <i>10-Gigabit-capable symmetric passive optical network (XGS-PON).</i> |
| [ITU-T L.300] | Recommendation ITU-T L.300/L.25 (2015), <i>Optical fibre cable network maintenance.</i> |
| [ITU-T L.301] | Recommendation ITU-T L.301/L.41 (2000), <i>Maintenance wavelength on fibres carrying signals.</i> |
| [ITU-T L.302] | Recommendation ITU-T L.302/L.40 (2000), <i>Optical fibre outside plant maintenance support, monitoring and testing system.</i> |
| [ITU-T L.310] | Recommendation ITU-T L.310 (2016), <i>Optical fibre maintenance criteria for access networks.</i> |
| [ITU-T L.313] | Recommendation ITU-T L.313/L.66 (2007), <i>Optical fibre cable maintenance criteria for in-service fibre testing in access networks.</i> |

3 Definitions

3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

3.1.1 optical distribution frame [b-ITU-T L.202]: A frame including the fibre organizer and means to store and guide pigtails cables inside the frame.

3.1.2 optical fibre identification [ITU-T L.300]: A technique for fibre identification by measuring certain optical characteristics to avoid incorrect cutting and/or connection of an optical fibre at a worksite.

3.2 Terms defined in this Recommendation

This Recommendation defines the following term:

3.2.1 live fibre detection: A technique to confirm that the condition of a target fibre is "live" (signal carrying).

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

BER Bit Error Ratio

FTTx Fibre to the x, where "x" indicates the final location on the user side of any one of a variety of optical fibre architectures, e.g., FTTB, FTTC, FTTH, FTTP.

ODF Optical Distribution Frame

OLT Optical Line Termination

ONU Optical Network Unit

PD Photo Detector

PON Passive Optical Network

5 Conventions

None.

6 Fundamental requirements for optical fibre identification

With a view to realizing the efficient construction and maintenance of optical fibre cable networks, it is very important for field engineers to identify a particular optical fibre among the many fibres in an optical fibre cable or cord at a worksite. Correct optical fibre identification would make it possible to avoid major problems such as the incorrect cutting and/or connection of an optical fibre. Also, when field engineers handle optical fibre lines in existing cables that accommodate "live" (signal carrying) fibres, they should avoid any degradation of communication signals in order to maintain service reliability.

Therefore, the fundamental requirements of an optical fibre identification technique are as follows:

- It must be able to correctly identify a specific fibre from a bundle of fibres by measuring certain optical characteristics.
- It must not damage an optical fibre and thus degrade its reliability.
- It should be capable of being performed without degrading optical communication signals in live fibres.

- It must be capable of identifying a specific fibre even if there is interference from the communication light.

7 Measurement methods and procedures

7.1 Measurement method

The method specified in this Recommendation uses a non-destructive macrobending technique. Figure 1 shows the configuration for optical fibre identification. An identification light is injected into the target fibre from the end of an optical fibre line (e.g., a central office) or is introduced by using optical devices for testing (e.g., an optical coupler). This identification light has a different wavelength from the communication light carrying the data signal. The optical fibre identifier bends the optical fibre, and a photodetector (PD) located at the centre of the bent part detects the modulated identification light leaking from the bent fibre, as shown in Figure 2. This enables the field technician to identify the fibre that is carrying the identification light.

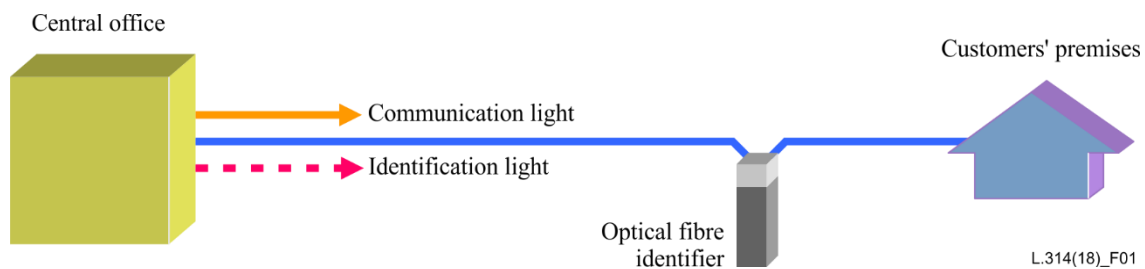


Figure 1 – Configuration for optical fibre identification

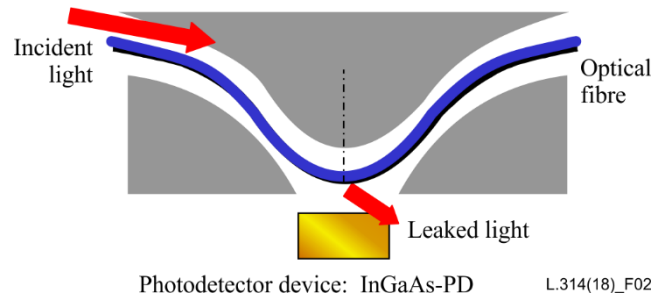


Figure 2 – Typical configuration of bent part of optical fibre identifier

This method applies to different topologies of optical access networks. However, it is difficult to use this method to identify a specific fibre in a point-to-multipoint network (described in [ITU-T L.310]) equipped with external optical splitters. This is because the optical power of the identification light launched from a central office is distributed equally to the branched optical fibres by the optical splitters, so the optical fibre identifier cannot identify a specific fibre. (Optical branching components (wavelength non-selective) are described in detail in [ITU-T G.671].)

If necessary, a specific fibre can be identified in a branched region below the optical splitter by launching the identification light from the far end of the optical fibre line at the worksite. If it is only necessary to know if a specific fibre is "live" or "dark", refer to clause 8.4.

7.1.1 Identification light source

The identification light is usually input at the end of an optical fibre in a central office or in a user's premises. If the fibre for identification is an in-service line, the communication signal light is carried in the optical fibre and leaked to a PD at the bent part of the optical fibre identifier. By modulating the identification light with a special frequency such as 270 Hz, 1 kHz, 2 kHz, etc., it is possible to

separate the communication light and the identification light and to detect the identification light with a high optical power level.

7.1.2 Bend applying part of optical fibre identifier

The bending loss of an optical fibre generally increases as the wavelength increases. The optical fibre is bent by the bend applying part of the optical fibre identifier to make it possible to detect the leaked identification light with high efficiency. The insertion loss for the communication light should be suppressed to avoid severe deterioration in the BER of transmission systems.

Also, to take into account the working efficiency when handling optical fibres in an optical enclosure, an optical cabinet, or an optical distribution frame (ODF) in which many optical fibres are accommodated, it is preferable for the head of the bend applying part of the optical fibre identifier to be compact and thin.

If bend insensitive fibres (e.g., [ITU-T G.657]) are used, the radius of the bend applying part should be designed appropriately and additional experience is required.

7.2 Applicable areas

Typical applicable areas of optical fibre identification techniques are central offices, indoor areas and outdoor areas.

7.3 Fibre types

The optical fibre characteristics should comply with [ITU-T G.652] and [ITU-T G.657].

7.4 Cable types

The optical fibre identifier can be applied to:

- primary coated fibre (typically 250 µm or 200 µm);
- tight-buffered fibre/secondary coated fibre (900 µm);
- optical fibre ribbon (typically up to 12 fibres);
- aramid yarn reinforced fibre cable (typically up to 3.0 mm);

It is noted that a single bend applying part does not necessarily cover all the fibre/cable types mentioned above. For example, several different bend applying parts may be required depending on fibre/cable types.

8 Requirements for in-service fibre line identification

The category of working stages for optical fibre identification is described in [ITU-T L.300] and [ITU-T L.302]. An optical fibre identification function is needed for both "preventative maintenance" and "post-installation pre-service or post-fault maintenance". During construction work, there are no "active" fibres among the bundled fibres in the optical fibre cables. Therefore, optical fibre identification can be performed without regard to wavelength. However, in-service fibre line identification is necessary during service construction and maintenance work, because there are both "live" and "dark" (no signal) fibres in the same optical fibre cables. The requirements for optical fibre identification for in-service fibre lines are described below.

8.1 Optical performance

The induced loss when the optical fibre identifier is applied should be designed to minimize the effect on the transmission systems.

Table 1 – Optical performance for in-service fibre line identification

Wavelength (in nm)	Induced loss (in dB)
1310	≤ 1
1550	≤ 2
1625	To be defined

8.2 Test light wavelength

When the optical fibre is carrying communication signals or its status is unknown, the identification test light wavelength must not be a wavelength that is used for communication signals so as to avoid any interference with the test light. The maintenance wavelength for in-service testing is defined by [ITU-T L.301]. There are several recommended maintenance wavelength bands depending on the operating wavelength range that is used by a given transmission system. The operating wavelength range in terms of spectral bands is described in [b-ITU-T G.Sup39] and [ITU-T G.987.1]. When the communication wavelength band extends to the L-band, an ultra long wavelength (U-band) of 1650 nm is used for maintenance testing.

8.3 Requirement for in-service monitoring and identification equipment

[ITU-T L.313] defines several requirements for in-service monitoring such as the wavelength band and optical power level of the test light, and the characteristics of the test light cut-off filter and measurement equipment.

8.4 Detection of the communication light

A communication light (and its power level) in an optical fibre line can be detected by using the optical fibre identifier even if there is no identification light. This function can be used to confirm whether the optical fibre line is "live" or "dark", which would help field engineers to avoid incorrect cutting of an optical fibre carrying a communication signal.

In point-to-multipoint systems as defined in the ITU-T G.984-series, [ITU-T G.987.1] and [ITU-T G.9807.1], detecting upstream light from an optical network unit (ONU) can be used for live fibre detection beyond the optical splitter, in which the upstream light should be detected and distinguished from the downstream light from the optical line termination (OLT).

This function is optional because the detection of a communication light does not necessarily help to uniquely identify a fibre. Moreover, this function requires cautious use, because the determination of a "live" or "dark" fibre by monitoring a communication light (and its power level) is not fail-safe.

Appendix I

Japanese experience – Optical fibre identification technology in Japan

(This appendix does not form an integral part of this Recommendation.)

I.1 Introduction

The smooth operation and maintenance of the optical equipment used in optical access networks is becoming even more important. Service reliability is also increasingly important because optical access networks are expected to assume a lifeline role. During the installation and maintenance of optical fibre communications networks, field technicians must first correctly identify a specific fibre from a bundle of fibres in order to avoid the incorrect cutting and/or connection of an optical fibre at a worksite. An optical fibre identifier is widely used as a convenient tool with which to identify a fibre for the construction and maintenance of optical cable networks. The optical fibre identifier functions are based on the non-destructive macro-bending method. With this method, optical fibres are identified by detecting an identification signal that leaks from a bent fibre.

I.2 Configuration

Figure I.1 shows the configuration of an optical fibre identification at a worksite. Optical fibres are normally identified by using a test light source and an optical fibre identifier shown in Figure I.1. At the central office, the identification test light is injected into the target fibre via an optical coupler for testing. This test light wavelength is 1650 ± 5 nm that is in accordance with [ITU-T L.313]. The test light wavelength is different from the wavelengths of the communication light carrying the data signal. An optical filter is equipped at either end of the optical fibre line. The filter allows a communication light to pass but not the test light. The optical fibre identifier is based on non-destructive macrobending. The equipment consists of a bender part and a photo-detector. The optical fibre identifier bends an optical fibre and the photodetector placed at the centre of the bent part detects the 270-Hz modulated identification light leaking from the bent fibre. This enables the field technician to identify which fibre is carrying the identification light. Also, this method can identify fibres while they are in use, so there is no need to interrupt service to the user.

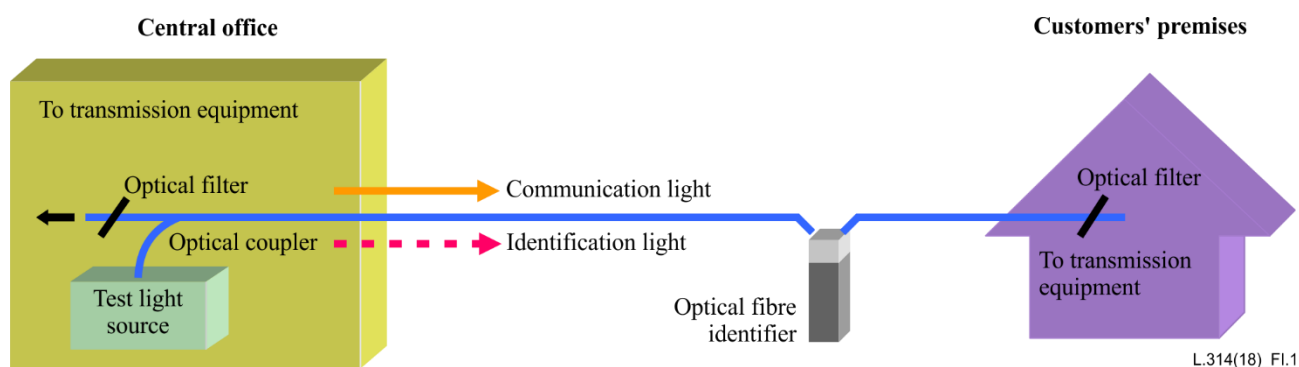


Figure I.1 – Configuration of optical fibre identification

I.3 Procedure for optical fibre identification

Fibre identification with a fibre identifier based on the macro-bending method is carried out with the following process. An identification light of 1650 nm modulated at a certain frequency (e.g., 270 Hz) is launched into a fibre by using an optical coupler for testing in the central office. This modulation prevents the identifier from detecting undesired light from an external light source. At the worksite, the field technicians bend a fibre by clamping it with the fibre identifier. The optical fibre identifier selectively detects the modulated identification light leaked from the bent fibre. Therefore, we can

identify a specific fibre from bundle of fibres by judging the presence of the leaked identification light.

I.4 Design of the optical fibre identifier

When a field technician bends a fibre carrying a communication signal, the bending loss might cause the deterioration of the communication light. If this bending loss is too large it will interrupt the service. On the other hand, when too little bending is applied, there is insufficient leaked light for detection at the photo-detector and the fibre cannot be identified. In order to reduce the bending loss with a certain detection sensitivity, it is necessary to optimize the amount of bending applied to the fibre. The optical performances of the optical fibre identifier are listed in Table I.2.

I.5 Applicable areas and cable types

Table I.1 shows the applicable areas of the optical fibre identification technique in Japan. This technique works well for optical fibres using communication wavelengths of 1310 nm, 1550 nm and the long-wavelength band (L-band) described in [b-ITU-T G.Sup39].

Table I.1 – Applicable areas and cable types

Area	Cable type
Central office	Aramid yarn cable (ϕ 1.1, 1.7 and 2.0 mm)
Outdoors	Primary coated fibre (ϕ 0.25 mm) and secondary coated fibre (ϕ 0.5 mm), 4-fibre ribbon, 8-fibre ribbon.
Indoors	Aramid yarn cable (ϕ 1.5 mm)

I.6 Detection of communication light

There are many cases where it is only required to ensure that the fibre is out-of-service. The optical fibre identifier has also a function of detecting the communication light, which is used to ensure whether the target fibre is "live" or "dark". For a point-to-multipoint network, detecting upstream light from ONU can be used for live fibre detection beyond the optical splitter, in which the upstream light should be detected and distinguished from the downstream light from the OLT. The frequency of the upstream light is different from that of passive optical network (PON) systems and its setting, and should follow the operators' guidance.

I.7 Optical performance of optical fibre identifier

Table I.2 shows typical optical performances of optical fibre identifier.

Table I.2 – Optical performances of optical fibre identifier

Function	Item	Performance
Fibre identification	Spectral response	900 ~ 1700 nm
	Receiver sensitivity	≤ -80 dBm
	Induced loss (Note 1)	≤ 1 dB at 1310 nm, ≤ 2 dB at 1550 nm
Communication light detection	Detectable power range (Note 1)	≥ -30 dBm
Upstream light detection	Detectable power range	≥ -5 dBm for upstream $\leq +3$ dBm for downstream (Note 2)

Table I.2 – Optical performances of optical fibre identifier

Function	Item	Performance
NOTE 1 – Primary-coated fibre, G.652 and G.657.A. NOTE 2 – Maximum downstream power level in the fibre to detect upstream light.		

Appendix II

Chinese experience – Optical fibre identification technology in China

(This appendix does not form an integral part of this Recommendation.)

II.1 Introduction

In cases where there is no pre-installed coupler to inject an identification light, optical fibre identification can be performed by using the communication signal as test light in the fibre line. The method also uses a non-destructive macrobending technique, and is only applicable to live fibres with communication light, it does not work for dark fibres.

II.2 Configuration

Figure II.1 shows the configuration for optical fibre identification without the identification light. Compared to fibre identification using identification light, low modulation is added to the live fibre for identification by signal generator, as shown in Figure II.1, which introduces periodical insertion loss of the link, detected by optical fibre identifier. The optical fibre identifier is similar, however, the function of detection of the periodical insertion loss of the link is added.

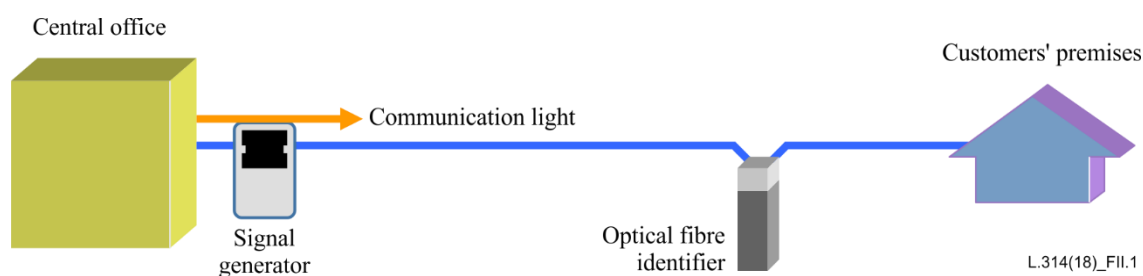


Figure II.1 – Configuration for optical fibre identification without identification light

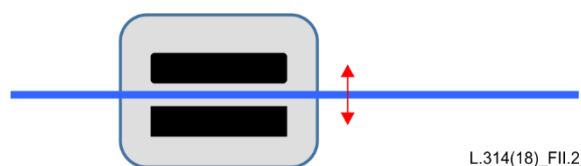


Figure II.2 – Typical configuration of signal generator

A signal generator is used for adding low modulation to the live fibre for identification, which could introduce periodical insertion loss of the link detected by optical fibre identifier, as shown in Figure II.2. The insertion loss for the communication light should be suppressed to avoid severe deterioration in the BER of transmission systems. The modulation frequency could be several Hz, such as 1 Hz and 11 Hz.

Also, to take into account the working efficiency when handling optical fibres in an optical enclosure, an optical cabinet, or an ODF in which many optical fibres are accommodated, it is preferable for the head of signal generator to be compact and thin.

If bend insensitive fibres (e.g., ITU-T G.657 fibres) are used, the signal generator should be designed appropriately and additional experience is required.

II.3 Applicable areas

Typical applicable areas for optical fibre identification techniques are central offices, and indoor and outdoor areas.

II.4 Fibre types and cables

The optical fibre characteristics should comply with [ITU-T G.652] and [ITU-T G.657].

The optical fibre identifier can be applied to:

- primary coated fibre (typically 250 μm or 200 μm);
- tight-buffered fibre/secondary coated fibre (900 μm);
- aramid yarn reinforced fibre cable (typically up to 3.0 mm).

It is noted that a single bend applying part does not necessarily cover all the fibre/cable types mentioned above. For example, several different bend applying parts may be required depending on fibre/cable types.

The signal generator can be applied to:

- tight-buffered fibre/secondary coated fibre (900 μm);
- aramid yarn reinforced fibre cable (typically up to 3.0 mm).

It is noted that one head of signal generator does not necessarily cover all the fibre/cable types mentioned above. For example, several different heads of signal generator may be required depending on the fibre/cable type.

II.6 Optical performance

Table II.1 shows typical optical performances of in-service fibre line identification with signal generator.

Table II.1 – Optical performance for in-service fibre line identification with signal generator

Wavelength (in nm)	Induced loss (in dB) (Note)
1310	≤ 2
1550	≤ 3
1625	To be defined
NOTE – Insertion loss includes the loss induced by signal generator and fibre identifier.	

Bibliography

- [b-ITU-T L.202] Recommendation ITU-T L.202/L.50 (2010), *Requirements for passive optical nodes: Optical distribution frames for central office environments*.
- [b-ITU-T G.Sup39] ITU-T G-series Recommendations – Supplement 39 (2016), *Optical system design and engineering considerations*.

SERIES OF ITU-T RECOMMENDATIONS

- Series A Organization of the work of ITU-T
- Series D Tariff and accounting principles and international telecommunication/ICT economic and policy issues
- Series E Overall network operation, telephone service, service operation and human factors
- Series F Non-telephone telecommunication services
- Series G Transmission systems and media, digital systems and networks**
- Series H Audiovisual and multimedia systems
- Series I Integrated services digital network
- Series J Cable networks and transmission of television, sound programme and other multimedia signals
- Series K Protection against interference
- Series L Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
- Series M Telecommunication management, including TMN and network maintenance
- Series N Maintenance: international sound-programme and television-transmission circuits
- Series O Specifications of measuring equipment
- Series P Telephone transmission quality, telephone installations, local line networks
- Series Q Switching and signalling, and associated measurements and tests
- Series R Telegraph transmission
- Series S Telegraph services terminal equipment
- Series T Terminals for telematic services
- Series U Telegraph switching
- Series V Data communication over the telephone network
- Series X Data networks, open system communications and security
- Series Y Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities
- Series Z Languages and general software aspects for telecommunication systems