




INTERNATIONAL TELECOMMUNICATION UNION

1992 - CCIR RECOMMENDATIONS

(New and revised as of 15 September 1992)

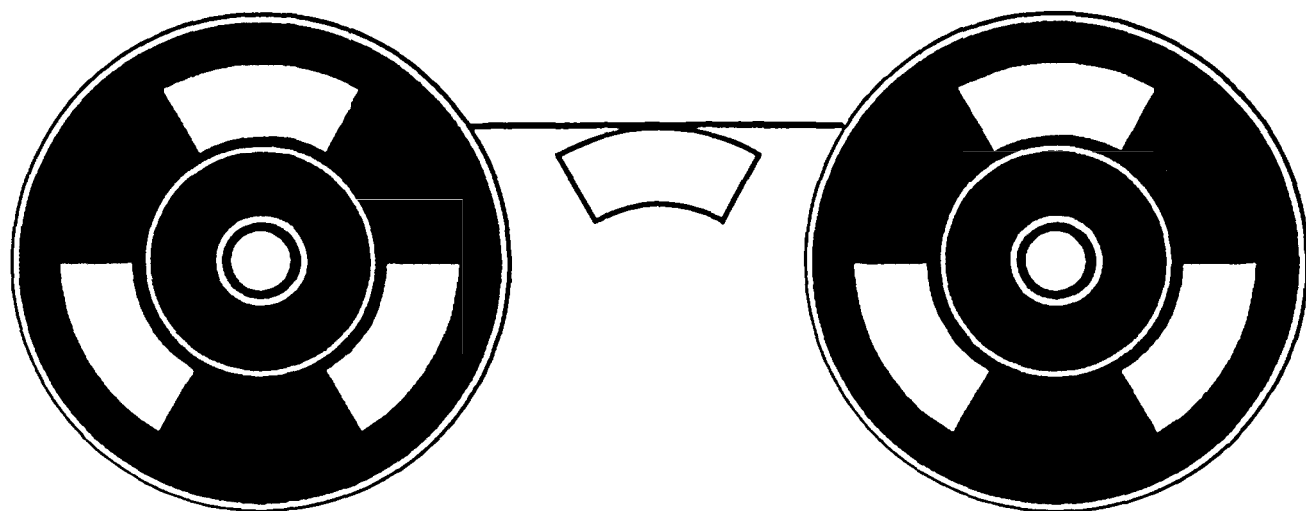

RBR SERIES
SOUND AND
TELEVISION RECORDING



INTERNATIONAL RADIO CONSULTATIVE COMMITTEE
ISBN 92-61-04721-1
Geneva, 1992

© ITU 1992

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from the ITU.



Recommendation 783 (1992)

Area of 35 mm release print film used for 16:9 conventional television systems

Extract from the publication:

CCIR Recommendations: RBR series: Sound and Television Recording
(Geneva: ITU, 1992), pp. 60-66

This electronic version (PDF) was scanned by the International Telecommunication Union (ITU) Library & Archives Service from an original paper document in the ITU Library & Archives collections.

La présente version électronique (PDF) a été numérisée par le Service de la bibliothèque et des archives de l'Union internationale des télécommunications (UIT) à partir d'un document papier original des collections de ce service.

Esta versión electrónica (PDF) ha sido escaneada por el Servicio de Biblioteca y Archivos de la Unión Internacional de Telecomunicaciones (UIT) a partir de un documento impreso original de las colecciones del Servicio de Biblioteca y Archivos de la UIT.

(ITU) للاتصالات الدولي الاتحاد في والمحفوظات المكتبة قسم أجراه الضوئي بالمسح تصوير نتاج (PDF) الإلكترونية النسخة هذه والمحفوظات المكتبة قسم في المتوفرة الوثائق ضمن أصلية ورقية وثيقة من نقلاً.

此电子版（PDF版本）由国际电信联盟（ITU）图书馆和档案室利用存于该处的纸质文件扫描提供。

Настоящий электронный вариант (PDF) был подготовлен в библиотечно-архивной службе Международного союза электросвязи путем сканирования исходного документа в бумажной форме из библиотечно-архивной службы МСЭ.

RECOMMENDATION 783

AREA OF 35 mm RELEASE PRINT FILM USED FOR 16:9
CONVENTIONAL TELEVISION SYSTEMS

(Question 113/11)

(1992)

The CCIR,

considering

- a) that telecines are sometimes used as a television post-production tool, and it is necessary to be able to position the scanned area anywhere on the film frame area for this application; however they are also used to televise film programmes with no image post-processing, and it is desirable that the areas to be used on the film frames be specified for this application;
- b) that many frame formats exist for 35 mm feature films, as listed below, and preferred dimensions for the area used on the frame of all those formats should be recommended:
 - 1.37:1 ("Academy" format, close to 4:3)
 - 1.66:1 (European wide-screen format, close to 16:9)
 - 1.85:1 (United States wide-screen format, close to 16:9)
 - 2.35:1 (anamorphic "Cinemascope" format);
- c) the content of ISO Standard 2907 "Maximum projectable image area on 35 mm motion picture film" which specifies the dimensions of the projectable area for all those film formats;
- d) the content of Recommendation 716,

recommends

1. that, for operational reasons, the area scanned on 35 mm release print films in the case of conventional-resolution television systems with a 16:9 aspect ratio, should preferably be adjustable over the whole film frame;
2. that in addition a number of pre-set areas to be scanned on 35 mm release print films should be selectable at choice; Table 1 proposes the nominal dimensions of the areas used on the various film formats with the pan-scan method and with the letter-box method; in the latter case the used areas should be centred on the film projectable area.

TABLE 1

Nominal 16:9 area used on 35 mm release print film frames

(Further sets of dimensions for the area used on film are under consideration for inclusion in future issues of this Recommendation)

Film aspect ratio	Projectable image dimensions (mm)	Used frame area dimensions (mm)	Notes
1.37:1	21.11 × 15.29	21.11 × 15.29 (archive films)	(1)
1.37:1	21.11 × 15.29	21.11 × 11.87 (shoot and protect)	(2)
1.66:1	21.11 × 12.62	21.11 × 11.87	(3)
1.85:1	21.11 × 11.33	20.14 × 11.33	(4)
2.35:1 (anamorphic)	21.29 × 18.21	16.19 × 18.21	(5)

- (1) These dimensions apply to the case of vintage archive films in which essential picture content is likely to cover the full height of the frame; in this case two vertical black panels will appear at the right and left of the HDTV display, the width of each being 11% of image width.
- (2) These dimensions apply to the case of films photographed according to the "shoot and protect" concept; they will cause a cropping of 11% at the top and bottom of the film image. It should be noted that the telecine operator may be in a position not to be able to tell whether a film has indeed been photographed according to the shoot and protect concept. Consequently, in case of doubt, the used area specified for the case of archive films should preferably be selected.
- (3) This area has an aspect ratio of 16:9 and a width equal to that specified in ISO Standard 2907 for the maximum projectable image area (Annex 1); it will cause a cropping of about 3% at the top and bottom of the film frame.
- (4) This area has an aspect ratio of 16:9 and a height equal to that specified in ISO Standard 2907 for the maximum projectable image area; it will cause a cropping of about 2% on the left and right side of the film frame.
- (5) In this case only 76% of the film frame width will be displayed; if it is necessary to display important picture content in the two cropped side panels (each of them 12% of picture width) recourse should be made to pan-scanning.


Note 1 – It would be beneficial if the telecine were capable of a considerable range of zoom ratios and horizontal/vertical positioning.

Note 2 – Information on scanning formats is given in Annex 2.

ANNEX 1

**Maximum projectable image area and area used in HDTV
on 35 mm release print film frames**

Adapted from ISO 2907-1984

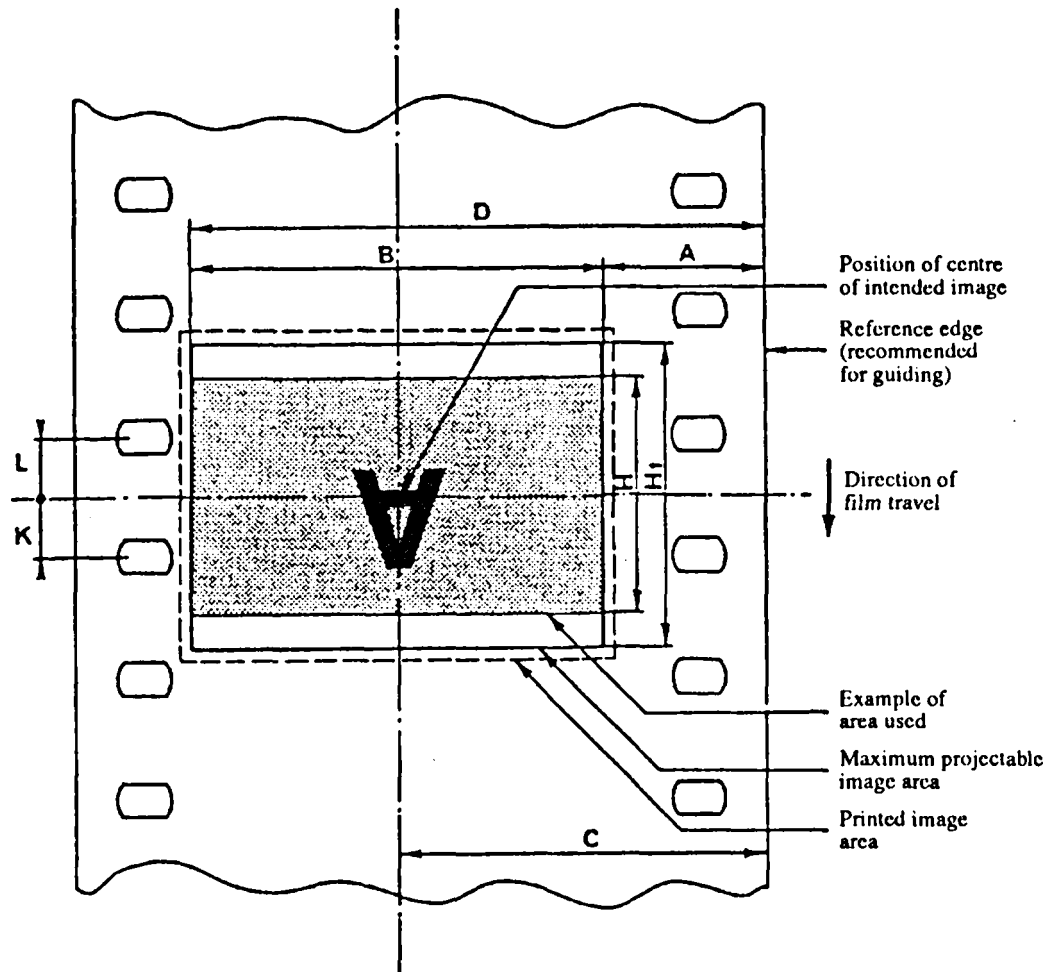

Dimensions

(The film is shown as seen from inside the projector looking towards the lens)

Dimension	Non-anamorphic pictures (mm)	Anamorphic pictures (mm)
A (min.)	8.20	8.10
B (1) (nominal)	21.11	21.29
C (nominal)	18.75	18.75
D (max.)	29.31	29.39
H ₁ (max.)	15.29	18.21
K and L (2)		

(1) B: derived value given for information.

(2) K and L: approximately equal.

Projectable Image height, *H*, of a non-anamorphic print

Aspect ratio	Image height, <i>H</i> (nominal) (mm)
1.85:1	11.33
1.66:1	12.62
1.37:1	15.29

ANNEX 2

Telecine scanning formats of 35 mm feature films**1. Introduction**

For many years, motion picture film has been an important source of programme material for television services and – at least in the initial phase of wide-screen television systems (e.g. HDTV, D- or D2-MAC, PALplus) – it is expected that film will also play a leading role as a programme medium in the future. In particular, feature films, which are normally composed for a wide-screen showing in the cinema, are expected to be a valuable source of high-quality programme material which will be readily available for future television transmission in the 16:9 aspect ratio.

In recent years television programmes originated on film have increasingly been exchanged in the form of video tape. More and more often the film-to-tape transfer for this has no longer been carried out by the broadcasters themselves, but by post-production and facilities houses. This is especially true in the case of the transfer of feature films, for which the transmission rights are normally purchased for only a limited period of time and which, after the transfer, are returned to the production house or studio for archival storage.

There are a number of film formats and aspect ratios in common use throughout the world, not only for the image capture, but also for the release of feature films. It is important, therefore, to consider the ways in which telecine scanning formats are best applied for the transfer of films.

2. Release print formats

Various film formats are in general use worldwide for the release of feature films on 35 mm film gauge. In the United States of America, most of the feature films for both cinema or TV showing are shot and released either in full aperture (1.33:1) or, more frequently, in the Academy format (1.37:1). In some cases, the original size of the exposed camera aperture is reduced in the intermediate printing stage with a hard matte in the optical printer. This produces an aspect ratio of 1.85:1 on the release print for cinema showing.

In Europe, however, cameramen nowadays usually photograph their motion pictures with a hard matte in the camera which is close to an aspect ratio of 1.66:1. Consequently, the release print is also delivered in this format. If a feature film is intended for showing predominantly on conventional 4:3 television, the Academy format with an aspect ratio of 1.37:1 is generally chosen.

To achieve an extra wide-screen format, feature films are sometimes shot worldwide in the Cinemascope format (2.35:1). An anamorphic camera lens squeezes the image horizontally (by a factor of 2), but does not change the image height.

The Academy format can be found in vintage archive films, and also in recent films which are intended for both wide-screen cinema and conventional television presentation and are therefore photographed according to the "shoot and protect" concept. Vertical cropping of the film frame should be avoided in the former case, while it is legitimate in the latter.

3. Transfer of feature films to TV

Wide-screen feature films for the cinema are normally made without special attention being given as to how they might best be presented on the television screen. Thus, in general, there will be a need to set up the telecine scan characteristics to interpret the desires of the original producer, within the constraints of the TV format. To meet these requirements with regard to the picture content, one possibility is to scan the full or nearly the full width of the wide-screen image on the release print. For conventional television this would normally result in a letter-box

presentation with black areas at the top and bottom of the screen. In cases, however, where it is desirable to utilize the full area of the display screen the full height of the image on the release print has to be televised. This aim can best be achieved by allowing the area reproduced within the film frame to be panned over the aperture available on the print (pan-scan method).

However, such a selective scanning can lead to difficulties in achieving an accurate and repeatable framing within practical telecine equipment. In the future, an increasing proportion of feature films can be expected to be produced using the "shoot and protect" method. Material of this type is amenable to reproduction using fixed telecine scan positions and sizes. Thus, in addition to the fully flexible scanning mode, it is also desirable to have a number of fixed scanning modes available in telecine equipment. Such fixed scanning modes can be accurately pre-set during normal maintenance procedures and give a reliable way of quickly achieving the chosen optimum conditions for the particular material being reproduced.

The use of a number of fixed scanning options is mainly attractive for reasons of operational convenience. However, at the start of a transfer operation, it may not be known which option best suits the local production preference and the artistic needs of a particular film. The scanning option may therefore need to be changed during the running of the film. Even if these changes are synchronized with cuts in the action, the resulting changes to the black borders at top and bottom (or possibly the sides in 16:9) may be disturbing to the viewer. The option of continuous changes of pan, tilt and zoom during transfer (preferably to preprogrammed instructions) would therefore be an advantage.

The present conception of the European broadcasting organizations concerning the transfer and display for feature films on both conventional 4:3 and wide-screen 16:9 television systems is given below.

4. Conventional 4:3 television

Displaying a film with an Academy aperture image on a conventional 4:3 TV screen presents little difficulty as both have nearly the same aspect ratio. However, some films released on the Academy format have been shot on the assumption that a mask will be used in the projection, printing or television scanning process. This can lead to unwanted items, such as microphones, appearing in shot if this is not taken into account during transfer.

A survey within members of the European Broadcasting Union on the transmission of non-anamorphic wide-screen feature films has shown that it is normal practice at most of the broadcasters in continental Europe to transfer release prints which have an aspect ratio between 1.66:1 and 1.85:1 in the original aspect ratio. That means that black bars appear on top and bottom of the picture on the display screen; the total percentage size depending on the actual film format on the release print. This letter-box method is normally preferred by production staff because it maintains the director's framing, even though the height of the picture on the screen and consequently, the vertical resolution of the picture details are lower. Cinemascope films with an aspect ratio of 2.35:1 are also often transmitted – if the scene content allows – with an aspect ratio of 1.85:1. This gives some cropping on both sides ($2 \times 11\%$) and with black areas on top and bottom (in total nearly 30% of screen area). In exceptional cases, Cinemascope films are televised in nearly the original aspect ratio (e.g. 2.2:1), leaving about 40% of the total screen area unused, but this gives severe losses in vertical resolution.

Where sub-titles are used, a letter-box or semi-letter-box presentation can be an advantage. The film image can be moved to the top of the television frame and the sub-titles put in the bottom black area which keeps them from obscuring the action in the film.

Most broadcasting organizations in the United Kingdom have traditionally shown both anamorphic and non-anamorphic wide-screen feature films at full image height. The main action is followed if possible by panning the area scanned by the telecine. This process normally requires a rather time-consuming post-production exercise and is not

always successful as far as the artistic presentation is concerned. However, this procedure is not usually followed during the running of trailers, titles and credit sequences of anamorphic films, when a letter-box presentation is used. A compromise letter-box setting is often applied to particularly critical material, where there is a large amount of action at the edges which makes panning difficult.

5. Wide-screen 16:9 television

At present, European broadcasters do not yet have much operational experience with the transfer of feature films to wide-screen television. Consequently, the scanned and transmitted area dimensions are still under discussion. In what follows, some obvious possibilities are given, taking into account both operational convenience and the artistic presentation of a film.

For feature films released in the Academy format (1.37:1), there are two obvious alternative ways of reproduction on wide-screen television:

- the full image height on the print is scanned. By this procedure, the full information on the film frame is shown on the television display, but with black borders down the left and right hand sides of the resulting television picture. This procedure is likely to be more suitable for archive material not produced for wide-screen presentation;
- the full width of the film frame is scanned and consequently the full height is not scanned. The television picture is completely filled, but information from the top and bottom of the film frame is discarded. This is admissible if the important action in the picture was captured in the inner portion of the image ("shoot and protect" method);
- in some cases, neither fixed height nor fixed width may offer an acceptable solution from the artistic point of view for wide-screen scanning of the Academy format. More operational flexibility would then be required, with both vertical and horizontal panning and zooming facilities (selective scanning of picture segments). This process has to be used with extreme care, because such a recomposition of the image content may change the artistic integrity of the film creation;
- feature films which are released in the normal wide-screen formats (most frequently 1.66:1 in Europe and 1.85:1 in the United States of America) are highly unlikely to present any problems as both formats are very close to the 16:9 aspect ratio of television. Such prints can be scanned either in full width (1.66:1) or in full height (1.85:1). In both cases, only a small proportion of the film information is discarded;
- finally, there are several options to reproduce material shot in the Cinemascope (2.35:1) format. If the full information has to be retained, the full width must be scanned. As a result black bars appear on the top and bottom of the picture (letter-box method). Another possibility is to scan the full height and underscan the width, which results in a loss of approximately 25% of the total information on both sides of the film frame (central scanning). In order to minimize the effects of this on the television output, it could be necessary, in some rare cases, to allow the scanned part of the image to be panned from side to side within the film frame (pan-scan method). The need for this may be expected to decrease as more material is produced using the "shoot and protect" principle. A compromise solution would be to scan neither the full height nor the full width, but somewhere in between. If the scene content allows, Cinemascope films could be transmitted, for example, with an aspect ratio of 2.1:1 with some cropping on both sides (about 5% each) and with small black bars on top and bottom (in total 15% of screen area). In any case, more of the picture content of Cinemascope films can be shown on the 16:9 television screen than the 4:3 one.

6. Conclusion

For the exchange of recorded television programmes transferred from feature films, it is common practice to come to an arrangement – prior to the film-to-tape transfer – on the scanned area and aspect ratio on the film. In this, not only the various film formats which are normally used for release prints have to be taken into account, but also the aspect ratio of the actual television system which will be used for transmission.

In this Annex, the different possibilities which are conceivable and which are already used at broadcasting organizations are described from the European point of view. In order to facilitate the future exchange of programmes originated on film, it is suggested that:

- telecine scanning should be as fully flexible as possible,
- a limited number of fixed scanning rasters are agreed,

for the transfer of feature films to both conventional 4:3 and wide-screen 16:9 television systems.
