

ITUEvents

ITU World Radiocommunication Seminar 2018

3-7 December 2018
Geneva, Switzerland

www.itu.int/go/ITU-R/WRS-18



Coordination between GSO
Networks:
 Δ T/T examination exercise
using GIBC Appendix 8
software

Veronica Roman
Space Administrative Software

Jorge Ciccorossi
Space Systems Coordination

ITU HQ Geneva,
6 December, 2018





Objectives:

- To learn about the latest Updates to Coordination Criteria between GSO networks in services and bands Not subject to a Plan
- To understand the different scenarios where AP8- Δ T/T Methodology is applicable.
- To get used to the GIBC-AP8 software by participating in a hands-on exercise, setting up the interface, running a case study and understanding the results.

Coordination Criteria after WRC-15:



Networks in the FSS, BSS, Space Research, Meteorological-Satellite and associated SO inside a Window from the nominal orbital position with Frequency Overlap in the same direction of Transmission. Frequency bands detailed in Appendix 5.

Trigger Arc

- | | | | |
|---|----------------|--|--------------------------------|
| • | ± 6 degrees : | FSS/BSS → BSS/FSS or FSS/SRS → SRS/FSS | Ku band |
| • | ± 7 degrees : | FSS → FSS | C band |
| • | ± 8 degrees : | FSS → FSS | Ka bands and above |
| • | | FSS /Meteo. Sat. → Meteo. Sat./FSS | Ka band (18 GHz) |
| • | | FSS/BSS → BSS/FSS | Ka band |
| • | ± 12 degrees : | BSS → BSS | Ka band (21.4-22 GHz Reg. 1&3) |
| • | ± 16 degrees : | FSS → BSS, BSS → FSS, BSS → BSS | Ka band |

$\Delta T/T$

- Any other service or sharing scenario where Trigger Arc is not applicable.
- Request to include/exclude a Network/Administration in/from Coordination under 9.41.

C/I


- For Notification purposes only, when 11.32A is requested.
- Based on methodology and criteria defined in REC. ITU-R S.741 and Rules of Procedure of RRB associated to 11.32A.

PFD

RESOLUTION 762 (WRC-15)

- Application of 11.32A to satellite networks in the FSS and BSS in 6 GHz and 10/11/12/14 GHz ranges.
- PFD at the GSO in case of uplink between networks separated by more than 6 deg. (Ku band) or 7 deg. (C band)
- PFD within potentially affected Service Area in case of downlink between networks separated by more than 6 deg.(Kuband)


AP8- $\Delta T/T$ Method: General Concept

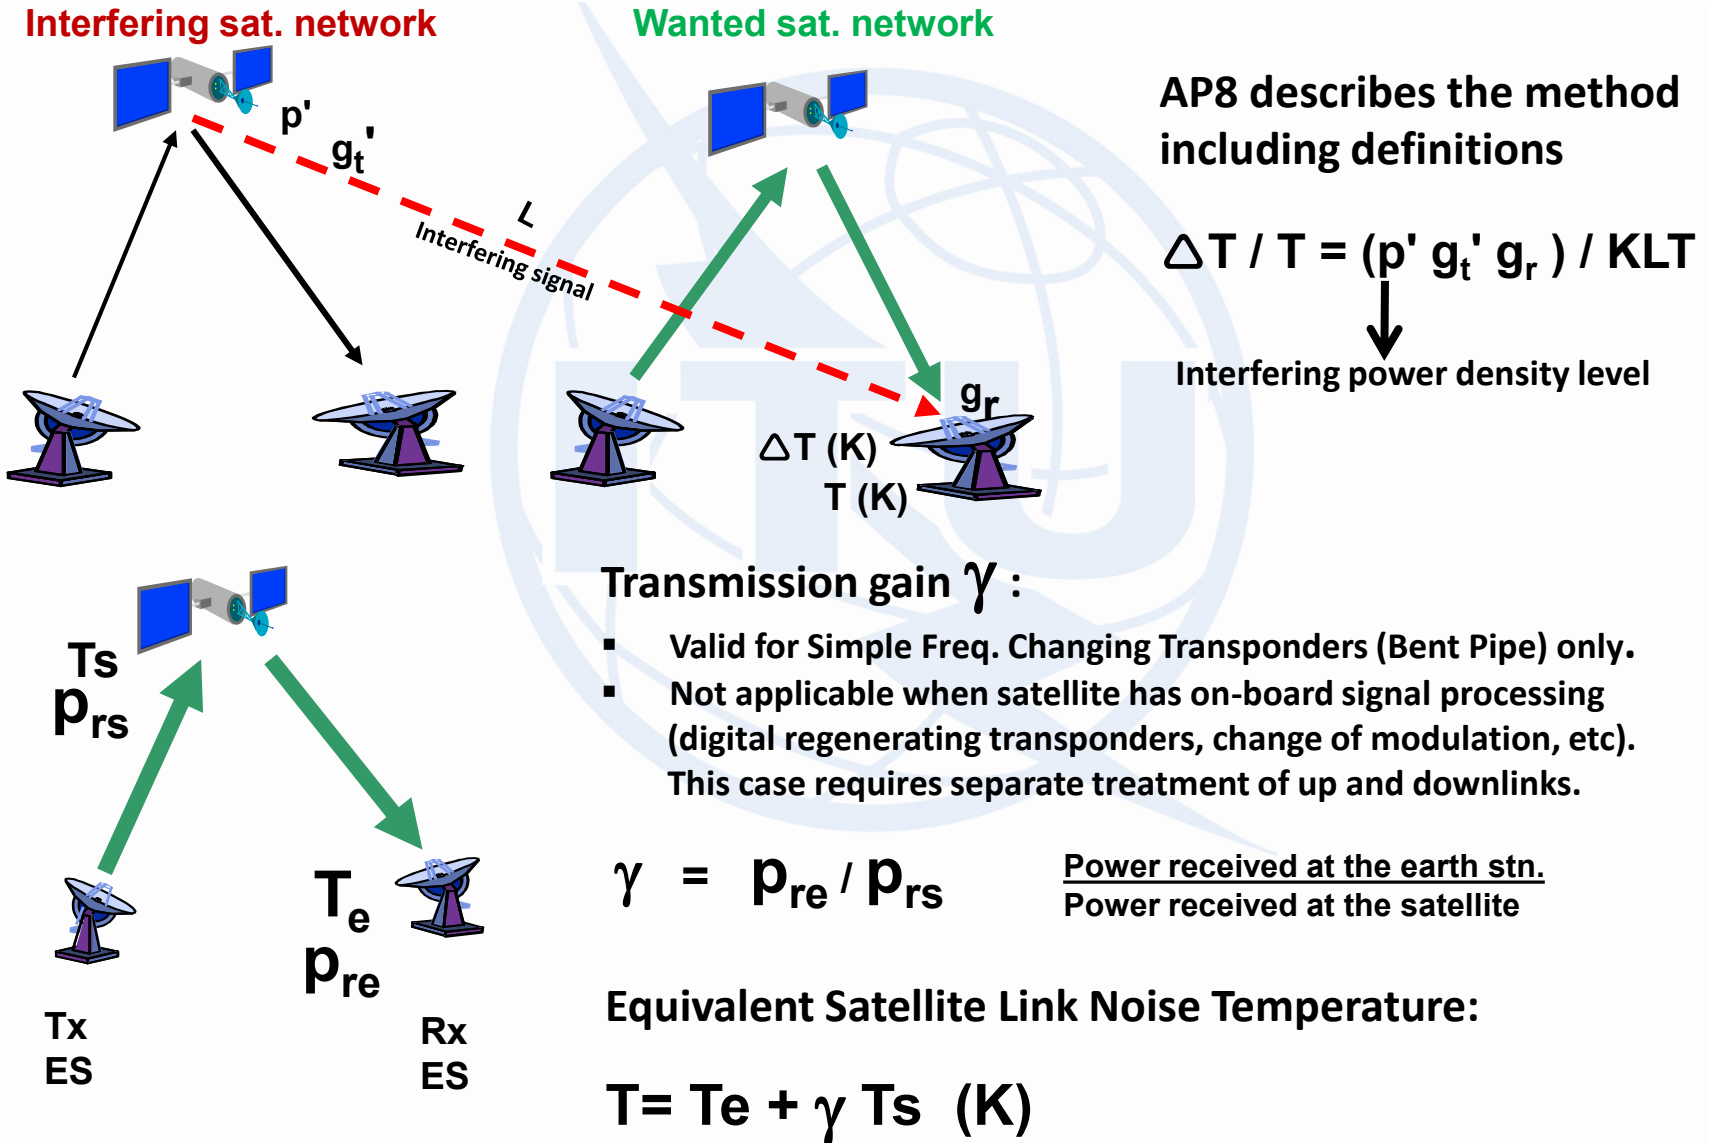

$\Delta T/T$ Case I : Freq. Overlap Co-Directional

Separate treatment of Up- and Downlink
(Wanted Satellite has on-board signal processing)


Freq.Overlap in Downlink only

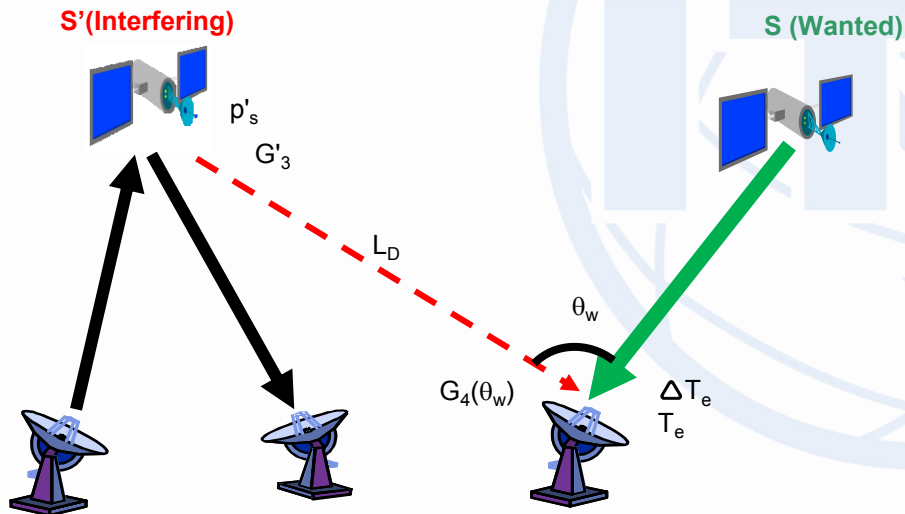

$$\Delta T/T = \Delta T_E / T_E$$

$$\Delta T/T = 10\log(p'_s) + G'_3 - L_D + G_4(\theta_w) - K - T_E \quad (\text{dB})$$

Freq.Overlap in Uplink only

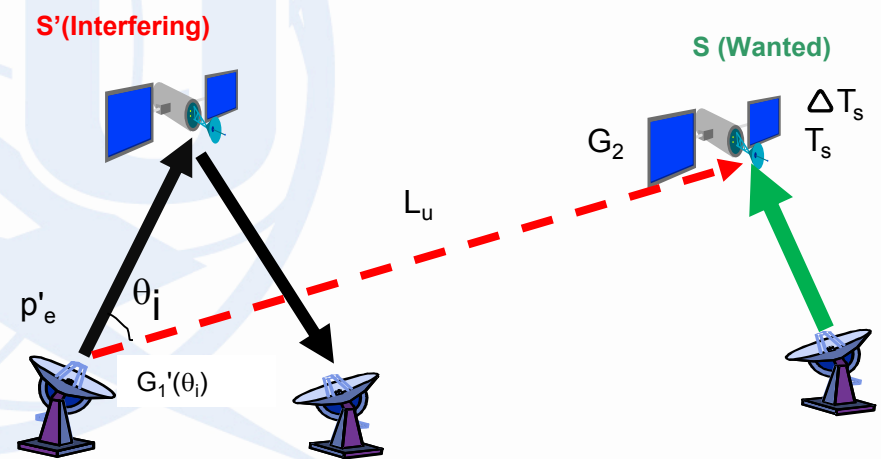


$$\Delta T/T = \Delta T_S / T_S$$

$$\Delta T/T = 10\log(p'_e) + G'_1(\theta_i) - L_U + G_2 - K - T_S \quad (\text{dB})$$

$\Delta T/T$ Case I : Freq. Overlap Co-Directional


Simple Freq.Changing Transponder (Bent Pipe)

Freq. Overlap Uplink Only

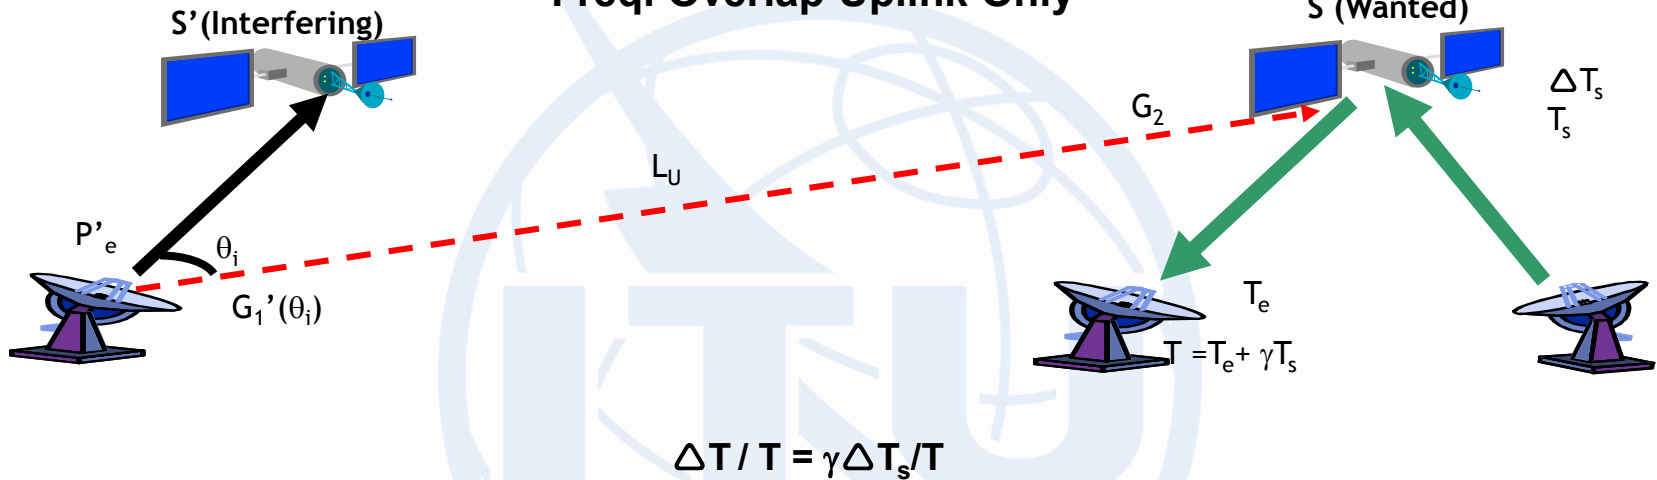

$$\Delta T / T = 10 \log \gamma + 10 \log (p'_e) + G'_1(\theta_i) - L_U + G_2 - K - T \text{ (dB)}$$

Freq. Overlap Downlink Only

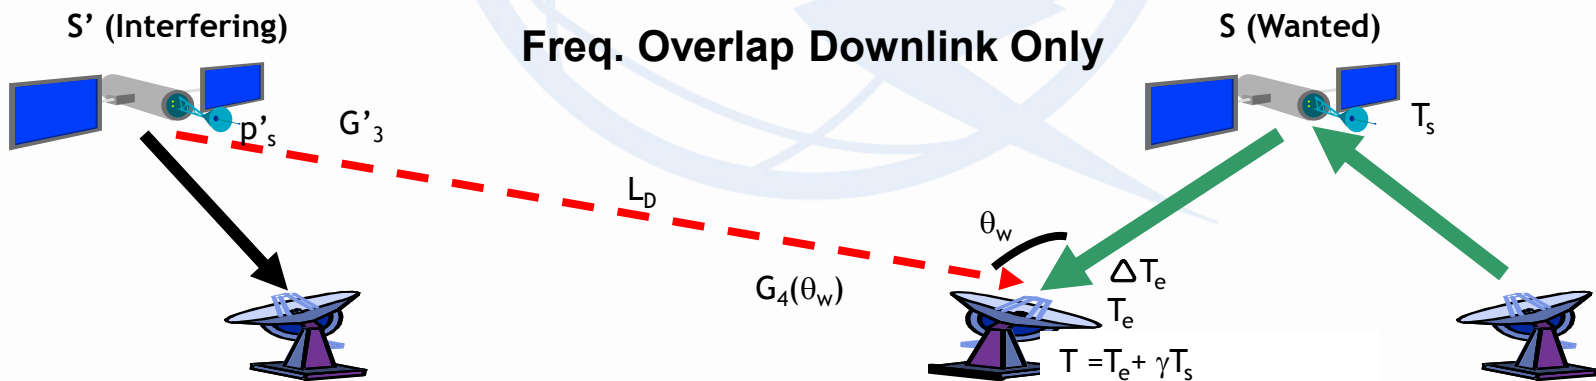

$$\Delta T / T = 10 \log (p'_s) + G'_3 - L_D + G_4(\theta_w) - K - T \text{ (dB)}$$


$\Delta T/T$ Case I : Freq. Overlap Co-Directional

Simple Freq. Changing Transponder (Bent Pipe)

Freq. Overlap in both links

S' (Interfering)

S (Wanted)

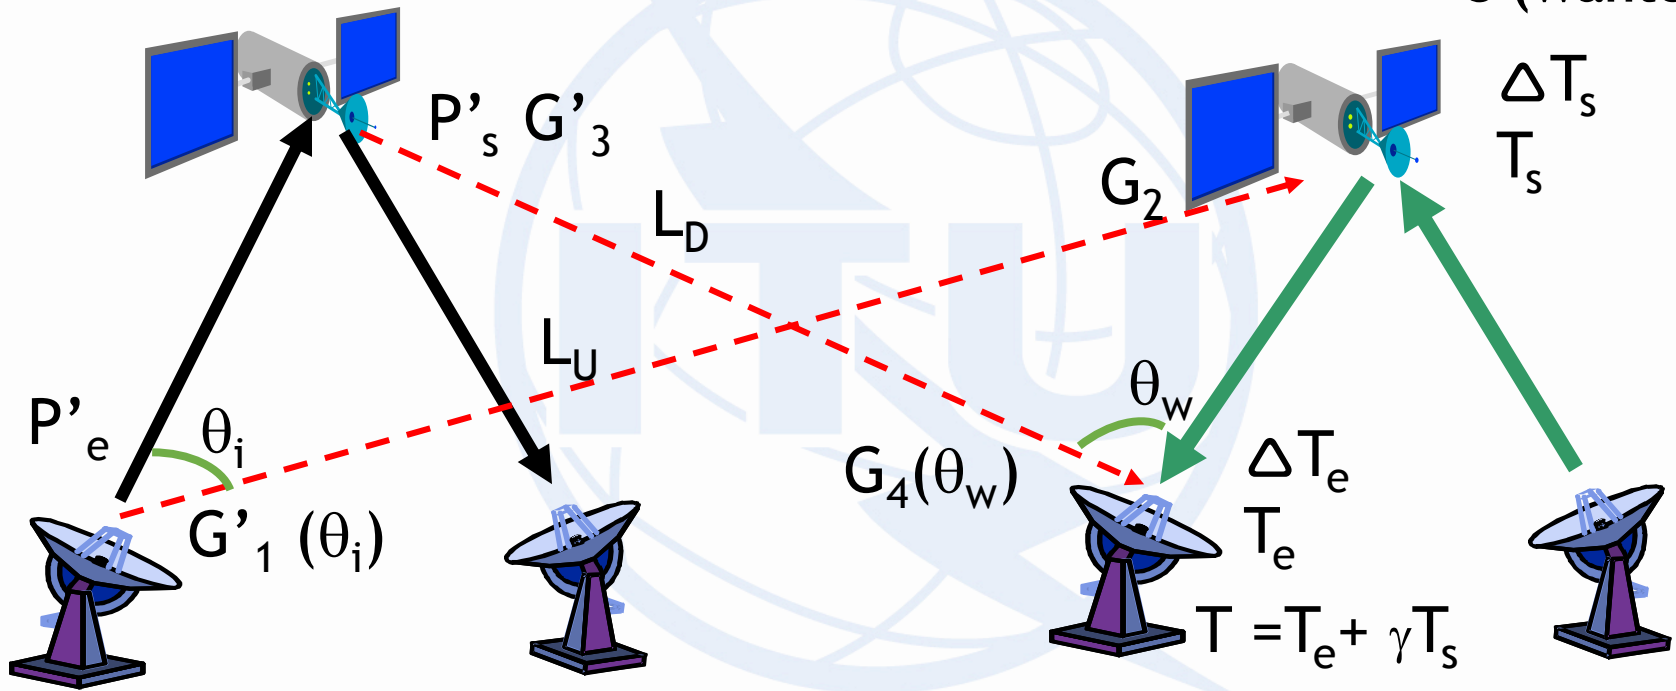

$$\Delta T/T = (\Delta T_e + \gamma \Delta T_s) / T$$


$$\Delta T/T = (p'_s g'_3 g_4(\theta_w)) / (k l_D T) + \gamma (p'_e g'_1(\theta_i) g_2) / (k l_U T)$$

$\Delta T/T$ Case II (Inter-Satellite): Freq.Overlap in Opposite Direction of Tx.




Downlink (interfering) overlaps Uplink(wanted)

Separate treatment of up & down links

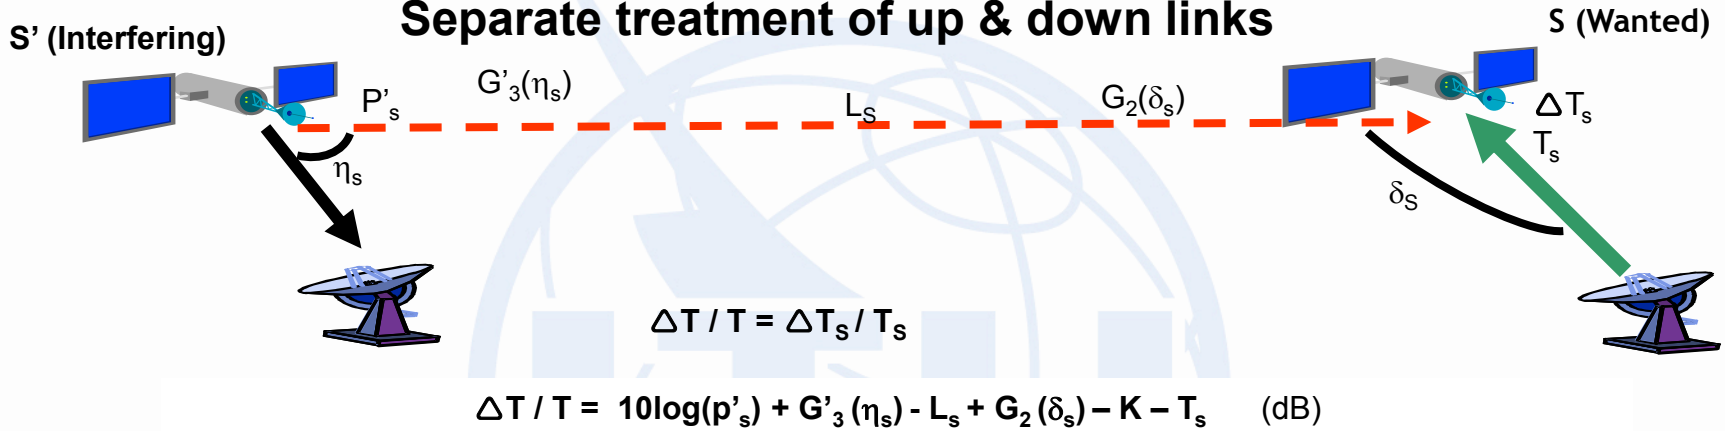

Wanted Satellite has Simple Freq. Changing TXP (bent-pipe)

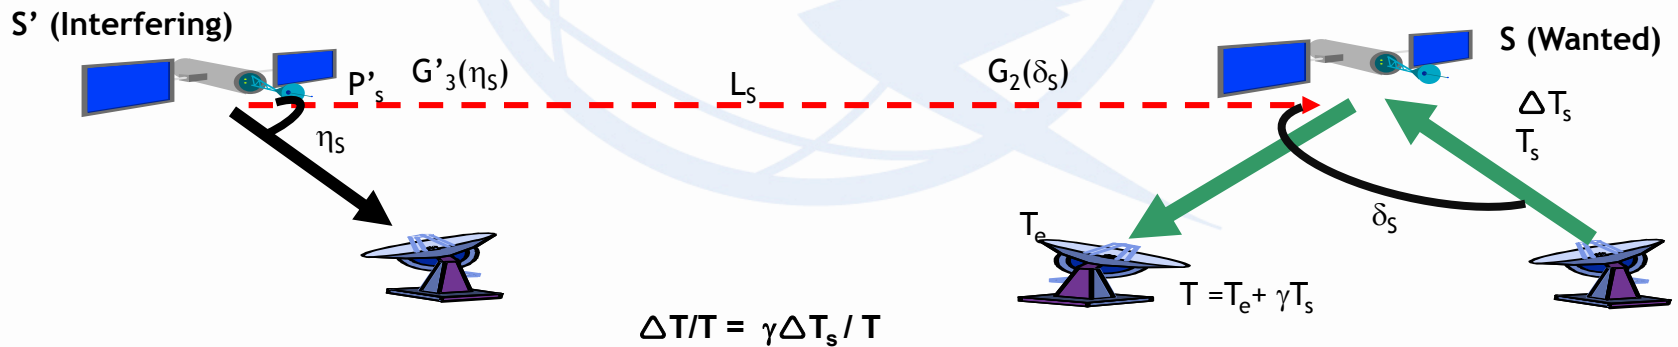

$$\Delta T/T = 10\log \gamma + 10\log(p'_s) + G'_3(\eta_s) - L_s + G_2(\delta_s) - K - T(\text{dB})$$

η_s = Direction in the GSO Orbit, from Interfering Satellite S' to Wanted Satellite S

δ_s = Direction in the GSO Orbit, from Wanted Satellite S to Interfering Satellite S'

Appendix 8 $\Delta T/T$ in Brief:

$\Delta T/T$ analysis is a method for determining the need for coordination between geostationary satellite networks.

$\Delta T/T$ method described in Appendix 8 of RR.

Criterion based on the calculation of the increase in noise temperature at the receiver due to interference.

$\Delta T/T > 6\%$ triggers coordination.

Beyond the threshold value harmful interference may occur.


If the limit value is not exceeded, the potential for interference does not exist and there is no need for further detailed calculations.

Appendix 8 $\Delta T/T$ is utilized by the BR to establish coordination requirements and by Administrations under 9.41 to be included or excluded from the coordination process.

GIBC/Appendix 8 software for $\Delta T/T$ analysis and the coordination arc approach (see Appendix 5 of the RR).

GIBC/Appendix 8 Exercise

- ✦ We will be using GIBC/Appendix 8 software to assess the coordination requirements
- ✦ In a real case, different interfering scenarios will be considered. In this exercise we are focusing on the Appendix 8 case I Uplink, co-directional interference.
- ✦ The satellite includes on-board signal processing for separate treatment of the up- and downlinks.

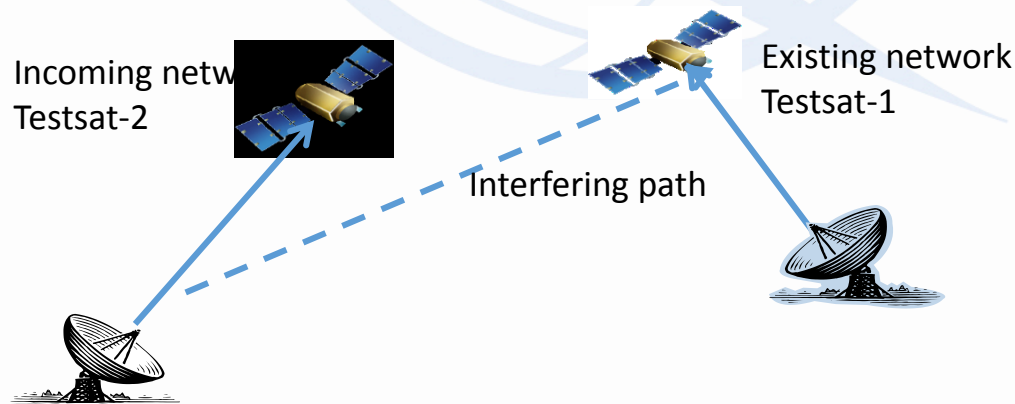

GIBC/Appendix 8 Exercise - Files



[Ap8_exercise_wrs18.mdb](#)

SNS formatted database containing the information for one incoming and one existing network.



[Ap8_exercise_wrs18_gims.mdb](#)


GIMS graphical data: service areas and gain contours that were captured and stored in the GIMS-format database.



[Ap8_exercise_results_wrs18](#)

Directory containing the results of the Appendix 8 examination.



 [Ap8_exercise_results_wrs18](#)

 [Ap8_exercise_wrs18.mdb](#)

 [Ap8_exercise_wrs18_gims.mdb](#)

GIBC/Ap8 Exercise - Test case data

Existing network:


- TESTSAT-1 Id:109000001 at 34°E
- R/Beam: RBEAM1, Max Gain 42dB, Noise Temperature 550K
- Central frequency: 29.95GHz, BW 72MHz

Incoming network:


- TESTSAT-2 Id:112000001 at 40°E
- R/Beam: BEAM1R, -49.9dBW/Hz
- Central frequency: 29.96GHz, BW 72MHz

Associated ES:

- Name: TYPICAL ES1
- Type: Typical Earth Station
- Radiation pattern:REC-580-6
- Max Gain: 54.5dB

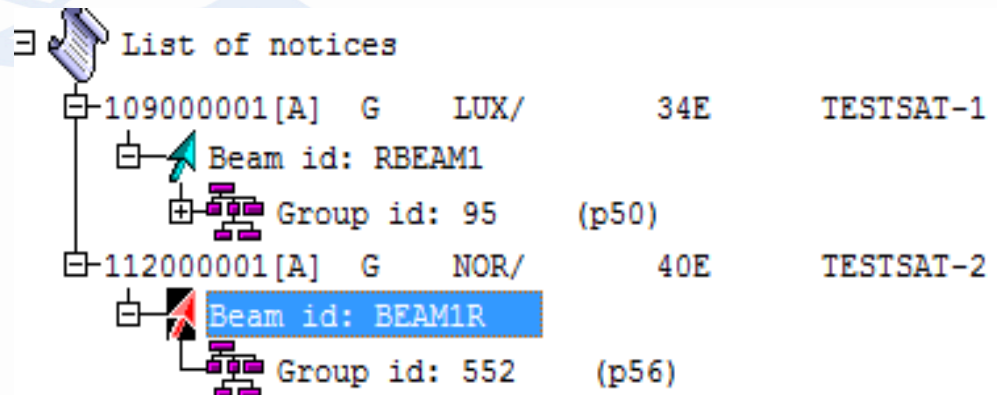

GIBC/Ap8 Exercise: Tools&Options

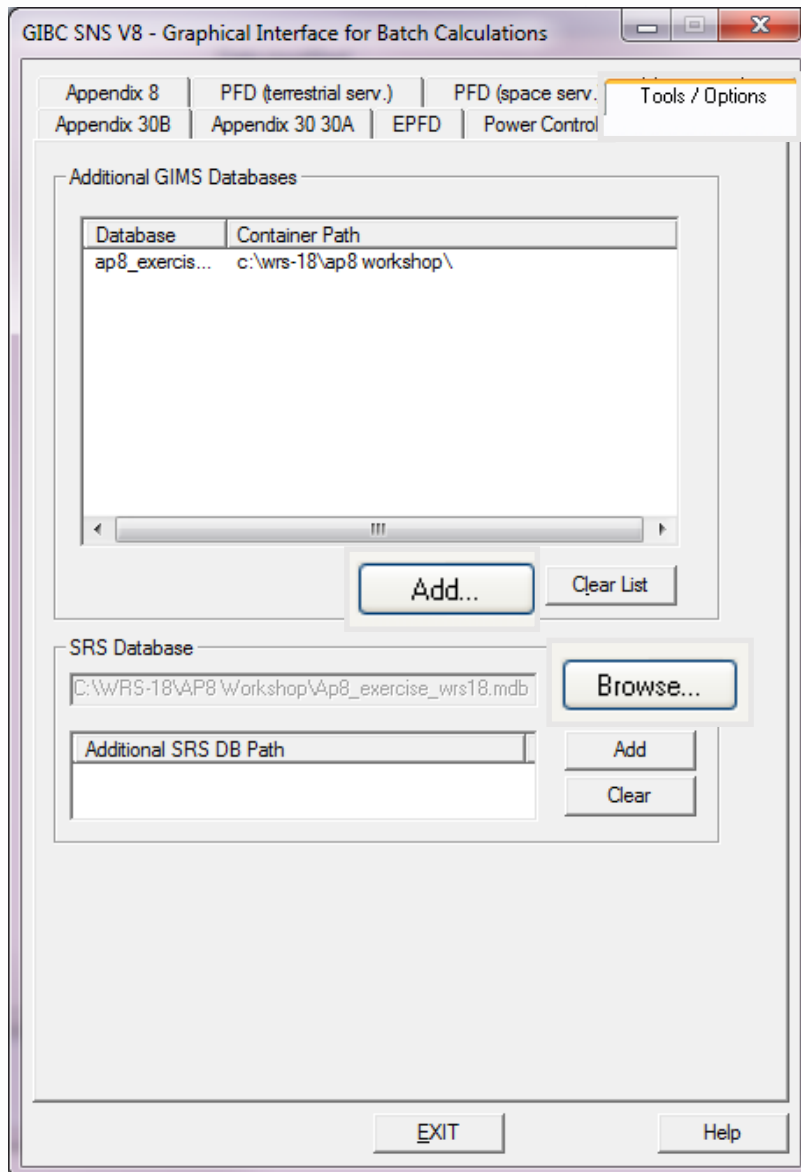

In the *Tools&Options* tab we specify the location of the databases involved in the analysis.


Click **Browse** and select the file:

Ap8_exercise_wrs18.mdb

Click **Add** and select the additional GIMS database file:

Ap8_exercise_wrs18_gims.mdb

GIBC/Appendix 8 Examination

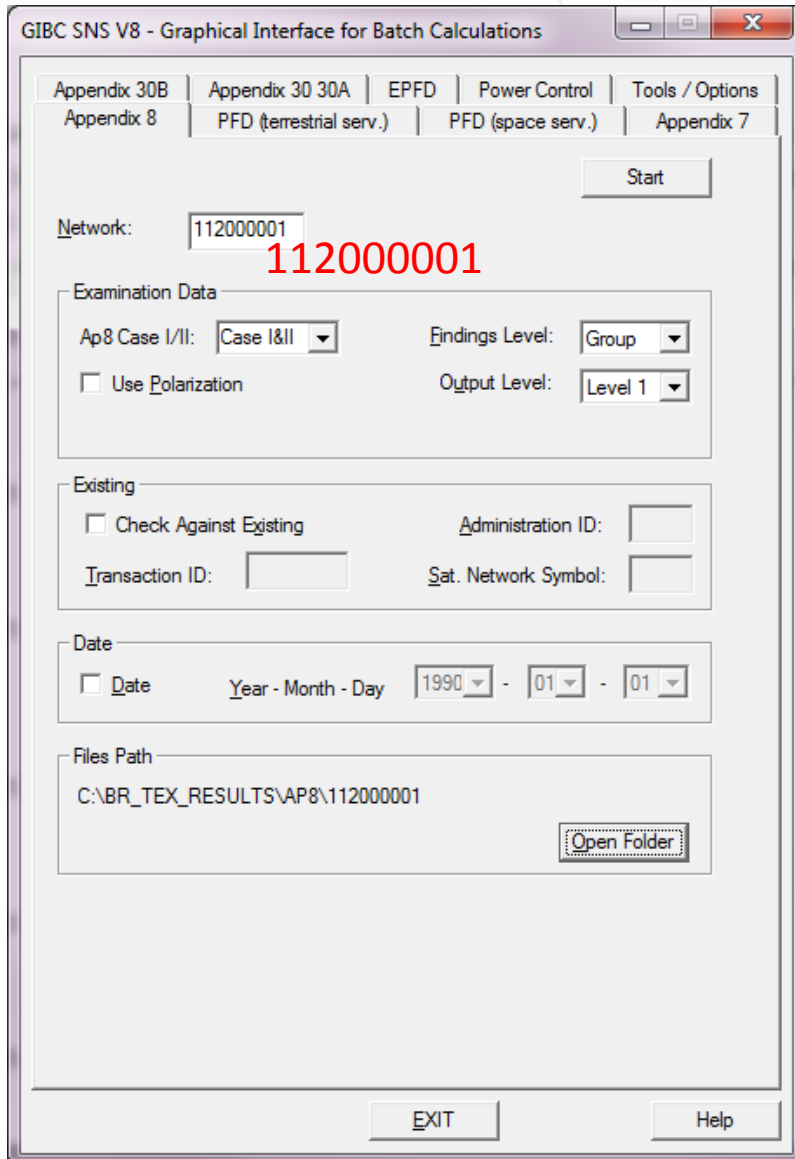

In the Appendix 8 tab:

*To introduce id of the incoming network:
112000001*

*Click **Start**.*

Wait for the program to finish:

“PROGRAM SNSBPAP8 TERMINATED OK”

*Then we click **Open Folder**.*

GIBC/Appendix 8 Results



The results are files located in an individual folder.


We will be looking in detail at the report file **APP8.LST** file.

APP8_OPT.LST with $\Delta T/T$ excess (Optional, for information).

MSG.LST file indicates if any GIMS diagram is missing.



C:\BR_TEX_RESULTS\AP8\id\time_stamp

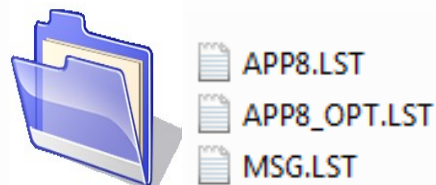



Report file Details (Case I Uplink)

EXI UP-LINK IS AFFECTED		MANDATORY EXAMINATION			Interfering scenario and DT/T value at the satellite	
					DT/TS = 7.61 %	
Incoming satellite: adm, name, orbital position, tolerances, central frequency, bandwidth					Incoming id, group, assignment	
I S NOR	TESTSAT-2	40.00E	0.10	0.10	29.960000 G 72000 K 23.10.12	C112.000001/000.000552/0001
BEAM1R EI EI		M	38.6 DB		Beam name, class of station, max gain	
Designation of Emission, power characteristics						
1M00G7W--		10.1 DBW	-49.9 DBW/HZ	-49.9 DBW/HZ (TOT. BW)		2D:23.10.12
Existing sat: similar to the incoming plus the off-axis gain, noise temperature and DT/T value at the satellite						
E S LUX	TESTSAT-1	34.00E	0.10	0.10	29.950000 G 72000 K 12.03.09	C109.000001/000.000095/0001
RBEAM1 EC EC		M	42.0 DB	42.0 DB	550 K	DT/TS = 7.61 %
3M00G7W--		11.90 DBW	-52.9 DBW/HZ	-52.8 DBW/HZ (TOT. BW)		2D:12.03.09
Associated ES: adm, name, coordinates, pattern name, max and off-axis gain						
I E NOR	TYPICAL ES1	030W5211 16N1544		REC-580-6	54.5 DB	9.5 DB

Appendix 8 Exercise Sum Up

In the USB Key (ITU WRS-18), the concerned files for the exercise are located under:



\Space Workshop\Day 4\AP8_Workshop

Follow those steps to complete the exercise:

1. Open GIBC
2. Tools&Options page:
 - a) Add the additional GIMS database file: Ap8_exercise_wrs18_gims.mdb
 - b) Add the SRS Database file: Ap8_exercise_wrs18.mdb
3. Appendix 8 page:
 - a) Enter notice Id: 112000001
 - b) Press **Start**
 - c) When the program finishes press **Open Folder**
4. Open the results subfolder.
5. Open **App8.Lst** file with text editor for perusal.



More information:



brsas@itu.int

Thank you for your kind attention!

Please note that all the technical data in this presentation and associated exercise files are only intended for demonstration purposes.