

I n t e r n a t i o n a l T e l e c o m m u n i c a t i o n U n i o n

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

J.380.1

(11/2011)

SERIES J: CABLE NETWORKS AND TRANSMISSION
OF TELEVISION, SOUND PROGRAMME AND OTHER
MULTIMEDIA SIGNALS

Digital transmission of television signals

**Digital program insertion – Advertising systems
interfaces – Advertising systems overview**

Recommendation ITU-T J.380.1



Recommendation ITU-T J.380.1

Digital program insertion – Advertising systems interfaces – Advertising systems overview

Summary

Recommendation ITU-T J.380.1 is part one of eight in the ITU-T J.380.x sub-series of Recommendations. It offers concepts applicable throughout the sub-series, leaving the normative details to each individual Recommendation.

History

Edition	Recommendation	Approval	Study Group
1.0	ITU-T J.380.1	2011-11-13	9

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2012

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

	Page
1 Scope	1
2 References.....	1
3 Definitions	1
3.1 Terms defined elsewhere.....	1
3.2 Terms defined in this Recommendation.....	1
4 Abbreviations and acronyms	2
5 Conventions	2
6 Advertising system logical services.....	2
6.1 Ad management service (ADM)	3
6.2 Ad decision service (ADS).....	3
6.3 Content information service (CIS)	4
6.4 Placement opportunity information service (POIS)	4
6.5 Subscriber information service (SIS)	4
7 Logical service configurations.....	4
8 XML Message data.....	5
8.1 XML layering	5
8.2 XML namespace.....	5
9 Transport mechanisms	6
9.1 Paired messages.....	6
9.2 Registration messaging.....	6
9.3 Query messaging	7
9.4 Service status and service check messaging.....	7
Bibliography.....	8

List of Figures

Figure 1 – Example advertising system services configuration.....	5
Figure 2 – XML layering	5
Figure 3 – Typical message sequence diagram.....	6

List of Tables

Table 1 – Structure of the series of Recommendations	v
--	---

Introduction

This Recommendation provides an overview of the ITU-T J.380.x series of Recommendations [ITU-T J.380.x], a standardized and extensible message-based interface defining a minimal set of cooperating logical services necessary to communicate placement opportunities, placement decisions, and placement-related event data necessary for accountability measurements. This document provides an introductory overview of the logical services specified in the normative standard parts and it briefly describes the logical service's unique value in the overall solution.

Each of the following have been considered in the formulation of this Recommendation and therefore the initial scope of the Recommendation includes, but is not limited to, the following video advertising platforms:

- Video on-demand
- Traditional linear cable
- Advanced set-top box applications
- Digital video recorders

[ITU-T J.380.x] defines an extensible framework of interfaces among a set of advertising system logical services. Within this framework, innovation and variation may occur as needed. The logical service interfaces are easily extended to incorporate new semantics when a new feature's implementation spans two or more logical services. When the efficacy of a new feature is established, the Recommendation may be revised to include its semantics in the affected interfaces. Thus, [ITU-T J.380.x] encompasses the following:

- 1) A minimal set of cooperative logical services needed to implement advanced addressable advertising systems.
- 2) The core data types and extensible message framework forming a vocabulary needed to communicate among the defined logical services.
- 3) The interfaces among these logical services using the core data types and messages.
- 4) Mechanisms for extensibility that allow innovation while preserving backward compatibility with already deployed systems – thereby reducing the complexity for incorporating new features within the Recommendation.

The normative parts of this Recommendation are intended to facilitate development and implementation in stages, where the early steps enable the largest value-added features and later stages build upon the early work to provide necessary advanced features.

The normative parts of this Recommendation define mechanisms for integrating systems implementing features such as:

- VOD based advertising
- Linear based advertising
- Enhanced advertising capabilities such as ad rotation groups
- Subscriber-based addressing
- Extension points for more advanced advertising or addressing features

The normative parts of this Recommendation do not constrain the packaging of logical services in an implementation.

- A logical service may be implemented as one or more physical systems created by the same vendor
- The deployment of a logical service may simultaneously include systems from one or more vendors

An implementation may incorporate one or more of the defined logical services and interfaces. Logical service clients are not limited to the suggested models herein.

This Recommendation does not describe how to address consumers or how an advertising decision system decides to place advertisements. Current privacy laws and regulations are out of scope but messages are designed to be compliant as may be required.

Table 1 summarizes the contents of the ITU-T J.380.x series of Recommendations.

Table 1 – Structure of the series of Recommendations

Recommendation	Description
ITU-T J.380.1 (this Recommendation)	Advertising systems overview, an informative overview of the ITU-T J.380.x series of Recommendations.
ITU-T J.380.2	Core data elements, a normative definition of the core data types and messaging needed within a digital advertising system.
ITU-T J.380.3	Ad Management Service (ADM) interface, a normative definition of the logical service interfaces needed to describe ad insertion opportunities and to receive ad placement decisions. Typically, the primary client of this interface is the Ad Decision System (ADS).
ITU-T J.380.4	Content Information Service (CIS), a normative definition of the logical service interface needed to implement the content query and content notification functions.
ITU-T J.380.5	Placement Opportunity Information Service (POIS) interface, a normative definition of the logical service interface needed to implement the placement opportunity query and notification functions.
ITU-T J.380.6	Subscriber Information Service (SIS) interface, a normative definition of the logical service interface needed to implement the subscriber information query and notification functions.
ITU-T J.380.7	Message transport compliance, a normative definition of the physical and logical protocols needed to transport ITU-T J.380.2 to ITU-T J.380.6.
ITU-T J.380.8	General Information Service (GIS), describes the syntax and semantics of common interface components that provide functions that are common to more than one advertising service. The GIS may be implemented by advertising system services that provide data to other advertising system services. It describes the messaging that may be used by a client to retrieve data by querying an advertising service's data model.

Part 2 (Recommendation ITU-T J.380.2) provides the normative definitions of the core data elements and messages that are used by Parts 3 (Recommendation ITU-T J.380.3) through to Part 6 (Recommendation ITU-T J.380.6) to define their various application specific data and messages. Part 7 (Recommendation ITU-T J.380.7) defines normative transport details necessary to exchange the XML message structures using different transport mechanisms. The reader is encouraged to proceed from here to Part 2 (Recommendation ITU-T J.380.2) for a detailed foundation of those common structures.

Recommendation ITU-T J.380.1

Digital program insertion – Advertising systems interfaces – Advertising systems overview

1 Scope

This Recommendation offers concepts applicable to all parts of [ITU-T J.380.x], leaving the normative details to the individual documents. It provides a high level view of the logical services and general set up procedures (i.e., registration and deregistration) as well as an introduction to the message pairing paradigms used throughout the Recommendation sub-series. Additional information, including the structure of [ITU-T J.380.x], can be found in the Introduction to this Recommendation.

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

- [ITU-T J.380.2] Recommendation ITU-T J.380.2 (2011), *Digital program insertion - Advertising systems interfaces - Core data elements.*
- [ITU-T J.380.3] Recommendation ITU-T J.380.3 (2011), *Digital program insertion - Advertising systems interfaces - Ad management service (ADM) interface.*
- [ITU-T J.380.4] Recommendation ITU-T J.380.4 (2011), *Digital program insertion - Advertising systems interfaces - Content information service.*
- [ITU-T J.380.5] Recommendation ITU-T J.380.5 (2011), *Digital program insertion - Advertising systems interfaces - Placement opportunity information service.*
- [ITU-T J.380.6] Recommendation ITU-T J.380.6 (2011), *Digital program insertion - Advertising systems interfaces - Subscriber information service.*
- [ITU-T J.380.7] Recommendation ITU-T J.380.7 (2011), *Digital program insertion - Advertising systems interfaces - Message transport.*
- [ITU-T J.380.x] Recommendation ITU-T J.380.x-series (2011), *Digital program insertion - Advertising systems interfaces.*

3 Definitions

3.1 Terms defined elsewhere

This Recommendation does not use any particular terms defined elsewhere.

3.2 Terms defined in this Recommendation

This Recommendation defines the following terms:

3.2.1 endpoint: An address, a uniform resource identifier (URI), or a specific location where a logical service may be found and consumed.

3.2.2 logical service: A well-defined, self-contained set of functions which is the endpoint of a connection. The logical service has some type of underlying computer system that supports message communication.

3.2.3 message: The unit of communication between two logical services.

3.2.4 placement: The decision resulting from a placement opportunity which may include a content binding and a set of constraints.

3.2.5 placement opportunity: A potentially constrained location relative to digital content where advertisement insertion or content alterations can occur. The alterations may include insertions, replacements, or deletions of content in whole or in part. These locations which contain the opportunity for content insertion have traditionally been referred to as Avails [b-SCTE 35] for linear video content; however, placement opportunity refers to address and time locations where content may be placed, regardless of platform (i.e., Video in VOD, Banner images on menus and ITV channels, etc).

3.2.6 service channel: A message communication path between two logical service endpoints.

4 Abbreviations and acronyms

ad	advertisement
ADM	Ad Management Service
ADS	Ad Decision Service
CIS	Content Information Service
HTTP	Hypertext Transport Protocol
POIS	Placement Opportunity Information Service
SIS	Subscriber Information Service
URI	Uniform Resource Identifier
XML	Extensible Markup Language

5 Conventions

None.

6 Advertising system logical services

The ITU-T J.380 sub-series of Recommendations defines a set of logical services comprising an advanced advertising system. Each logical service may itself be a complex system. The Recommendation is cast in terms of the key interface definitions implemented by these logical services. The following interfaces are defined in the following normative Recommendations:

- [ITU-T J.380.3]: Ad management service (ADM)/Ad decision service (ADS)
- [ITU-T J.380.4]: Content information service (CIS)
- [ITU-T J.380.5]: Placement opportunity information service (POIS)
- [ITU-T J.380.6]: Subscriber information service (SIS)

The following clauses provide a high level overview and introduction to each of the logical services. A compliant implementation is not required to implement all the services. However, a compliant logical service implements the normative interface definitions for that service. Figure 1 (clause 7) provides an illustration of one such possible configuration which may be a useful point of reference while reading the descriptions.

6.1 Ad management service (ADM)

The Ad management service defines messages in support of advertisement (ad) insertion activities. The primary consumer of these messages is an ADS. The message interfaces exposed by an ADM allow for both preconfigured ad decisions as well as real-time fulfilment models. Both models are conveyed using the `adm:PlacementRequest` and `adm:PlacementResponse` messages defined in [ITU-T J.380.3]. An ADM implementation may incorporate some simple ad selection rules (ex. ad rotations) but more complex ad decisions are the responsibility of an ADS.

The defined ADM message interface also supports registration, list registration, and deregistration exchanges. The registration message may include filters which a requesting service like an ADS wants applied by an ADM in selecting an ADS to which it should direct its `adm:PlacementRequest`.

ADM detection of a placement opportunity is outside the scope of that Recommendation. However, the ADM may be a service consumer of a POIS and/or a CIS in order to obtain such information.

The `adm:PlacementRequest` message supports extensions to communicate content and client specific metadata. The content metadata may be provided by the CIS and how the CIS obtains this information is outside the scope of the Recommendation. The client metadata may be acquired from the SIS and again, how the SIS obtains this information is outside the scope of the Recommendation.

Using the `adm:PlacementResponse`, the ADS supplies placements. The ADS may request a change to the current structure within placement opportunities as it deems necessary based on campaign rules and business logic outside the scope of the Recommendation. The Recommendation facilitates a wide range of operations not previously available in earlier advertising systems (e.g., insert, delete, replace, etc.).

Physical topology is outside the scope of this Recommendation as production solutions can be arbitrarily simple or complex potentially ranging from something as simple as an ADS/ADM pair to many systems grouped together to form a single logical service. Each ADS registers with one or more ADM logical services to take responsibility for making ad decisions based on defined criteria. Likewise, each ADM may manage one or more physical delivery models (ex. on demand, linear, etc.). This model illustrates the flexibility the ITU-T J.380 message model supports.

The ADM interfaces and messages are normatively defined in [ITU-T J.380.3].

6.2 Ad decision service (ADS)

The ad decision service determines how advertising content is combined with non-advertising (i.e., entertainment) content assets. The decisions made by an ADS may be straightforward (i.e., specific ad content placed at a specific time in a specific asset) or arbitrarily complex (based on subscriber data, advertising zone, etc.). The internal operation of an ADS is outside the scope of this Recommendation.

An ADS registers with one or more ADMs to make ad decisions for specific content services and/or ad types or other identified criteria. An ADS may handle different content types on behalf of many different content owners. It may therefore establish multiple logical service channels to separate the different owners. It may also establish a single logical service channel and register to perform viewer addressing for multiple content owners on multiple programmers' networks. An example is the ADS establishing a service channel to allow it to handle all local placement opportunities on all channels. The same ADS may establish a second service channel to request the handling of all network placement opportunities for a particular channel and a different ADS may establish a service channel to allow it to handle all on demand content placement opportunities.

Where multiple ADS systems overlap in areas that they intend to handle, the ADM might limit their scope. However, this decision is implementation specific and outside the scope of this Recommendation.

The ADS interfaces and messages are normatively defined in [ITU-T J.380.3].

6.3 Content information service (CIS)

The content information service manages metadata describing all the assets (both advertising assets and non-advertising assets) available to the other ITU-T J.380 logical services. The CIS provides query and notification interfaces to the other logical services. The query service is available on an ad-hoc basis and may be called by any other logical service at any time without any prior registration. Queries specify values or patterns to be sought in the query message metadata and the specified matching information (or an error indication) is returned in a response message.

A content notification service is provided through a registration process. Any system may register to receive content notification messages from a CIS whenever a real-time change occurs to the metadata such as the arrival of new matching assets. Similar to queries, the registration request message may include filtering criteria limiting the CIS notification scope.

The CIS specification interfaces and messages are normatively defined in [ITU-T J.380.4].

6.4 Placement opportunity information service (POIS)

The placement opportunity information service (POIS) holds, maintains, or retains descriptions of placement opportunities. The POIS may also contain attributes and constraints for each placement opportunity, platform compliance, rights, and policies of the content in which the placement opportunity exists. These placement opportunities are content specific, therefore attributes and constraints may vary by network, geographic region, or other content distribution dimension.

6.5 Subscriber information service (SIS)

The Subscriber information service manages the per-subscriber information relevant to ad placement decisions. The SIS provides mechanisms surrounding privacy issues.

7 Logical service configurations

Many possible configurations of the logical services described by this Recommendation are possible. Figure 1 illustrates a simple configuration with a number of variations of deployment among the services. In one case an ADM is shown as a standalone service while in another an ADM and CIS are combined into a single physical server. Many other combinations beyond the illustration in Figure 1 are possible. All communication lines shown in Figure 1 are message sequences defined by the various parts of this Recommendation. Services shown with dotted communication indicate that the Recommendations are still to be defined.

In Figure 1, the systems shown as dark grey boxes are hypothetical and out of the scope of this Recommendation. They are the systems that implement the functions such as detecting placement opportunities (sometimes referred to as cue messages or placement opportunity triggers), inserting ads into a linear stream or processing orders from advertisers for certain types of programming, for example. These systems are implemented by a multitude of vendors and vary widely in the features that they provide. The logical systems of this document (shown in the white boxes) provide a standard set of public interfaces to expose the relevant functions of their associated private systems. In this way, the details of how and where content is stored, for example, are kept within a vendor's content storage system and the associated CIS makes the metadata regarding this content available to other logical services.

Figure 1 also illustrates the potential many-to-many relationships among these services. In the example, the ADM associated with the hypothetical VOD system is communicating with a single ADS while the ADS is communicating with two ADMs. Figure 1 is just one example of the many possible configurations.

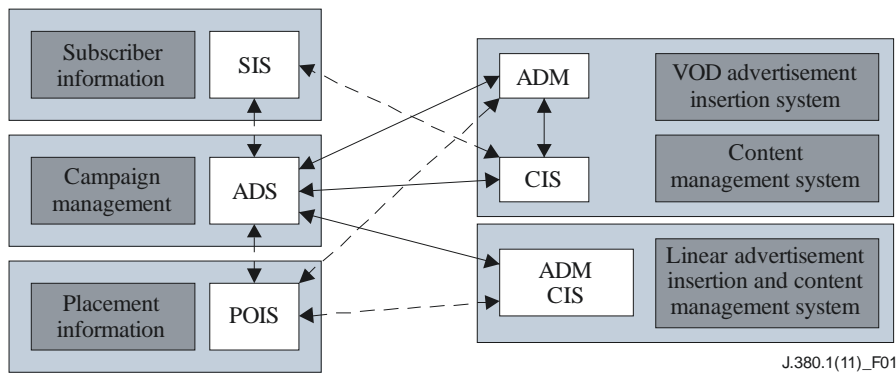


Figure 1 – Example advertising system services configuration

8 XML Message data

8.1 XML layering

A key assumption underlying the concept of [ITU-T J.380.x] is the definition of a common set of data types and message structure used to communicate among the logical services. These data types and message structure do not depend on any domain type (VOD, linear cable, switched digital video, etc.) or on specific advanced advertising functions (session based advertising, subscriber addressing, etc.)

The Recommendation defines these "core" data types then adds to them as needed to address the needs of specific platforms and advanced advertising functions. Figure 2 shows the XML stack factored into separate layers and blocks that model the parts of [ITU-T J.380.x].

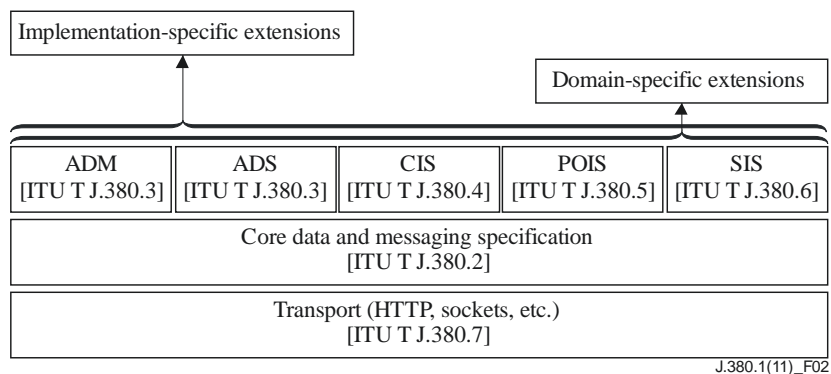


Figure 2 – XML layering

NOTE – In Figure 2 the term "Domain-specific extensions" is used to refer to specific delivery platforms – such as VOD, linear cable, switched digital, and advanced set-top applications.

8.2 XML namespace

The current XML standard set includes the XML namespaces standard which provides mechanisms for partitioning different XML vocabularies into distinct, unambiguous domains. Each namespace is outlined in the respective normative clauses of this Recommendation.

Namespace versioning is supported and detailed in [ITU-T J.380.2].

9 Transport mechanisms

[ITU-T J.380.7] defines the specific mechanism or protocols for transporting the messages. [ITU-T J.380.x] does not expressly require or prohibit that specific message exchanges occur directly between two logical services. Messages may be passed and routed through intermediaries as long as such activity does not compromise the messaging specification defined within any of [ITU-T J.380.x]. It is the responsibility of the message sending system and the selected transport (see [ITU-T J.380.7]) to send them in such a manner as to facilitate processing in an appropriate order.

9.1 Paired messages

All messages within [ITU-T J.380.x] are defined as pairs – every message initiated by some logical system has a defined response. There are two general categories of message pairing defined: request/response and notification/acknowledgement.

Figure 3 illustrates a typical sequence of such message pairs. In the example, an ADS initiates the communication by requesting to be registered to receive content notifications from a CIS. The CIS sends a response message to the ADS accepting (or rejecting) the request. The CIS then spontaneously sends notifications to the ADS as changes to the specified content occur over time. The ADS acknowledges each of these notifications but neither system is required to maintain synchronous threading of messages on the transport. Prerequisite registration requirements for specific messages are reflected in the respective logical interface definitions and therefore not expanded upon here.

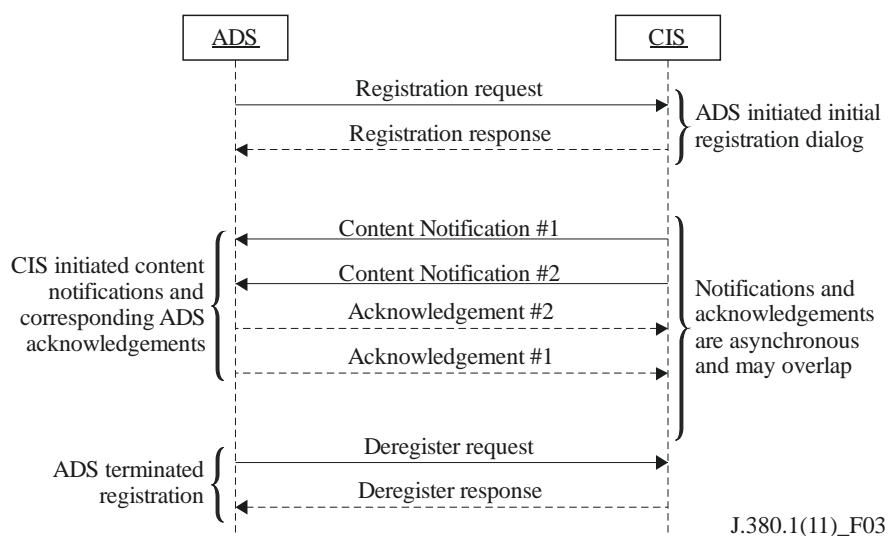


Figure 3 – Typical message sequence diagram

9.2 Registration messaging

Part of this Recommendation provides semantics for services to offer the ability of one logical service to register as a consumer of events from another service. This service producer, service consumer model offers a great deal of flexibility for communication between logical services. A logical service registers with some other service in order to establish ongoing consumption of the service provided. The example in Figure 3 above illustrated an ADS registering to receive content notifications from a CIS.

Deregistration allows one service to remove itself as a consumer. List registration offers the chance for any service to list the registrations currently stored on the producing service.

9.3 Query messaging

Query request messages ask for information from a logical service. Any logical service may issue a query to any other logical service at any time without previously registering to do so. The requested information (or an error status) is returned in a query response message.

9.4 Service status and service check messaging

Service status and service check messages are used to communicate information between logical interfaces. Service status messages are sent from a logical service to some other logical service with which it has previously registered in the event of a change in ability to perform the registered service. Service check messages may be sent to any logical service on an ad hoc basis to poll the service in order to determine its availability and other status.

Bibliography

[b-SCTE 35] ANSI/SCTE 35 (2007), *Digital Program Insertion Cueing Message for Cable*.

SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	General tariff principles
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Terminals and subjective and objective assessment methods
Series Q	Switching and signalling
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
Series Y	Global information infrastructure, Internet protocol aspects and next-generation networks
Series Z	Languages and general software aspects for telecommunication systems