

International Telecommunication Union

ITU-T

TELECOMMUNICATION
STANDARDIZATION SECTOR
OF ITU

Q.3300

(03/2010)

SERIES Q: SWITCHING AND SIGNALLING

Signalling requirements and protocols for the NGN –
Resource control protocols

**Architectural framework for the Q.330x series of
Recommendations**

Recommendation ITU-T Q.3300



ITU-T Q-SERIES RECOMMENDATIONS

SWITCHING AND SIGNALLING

| | |
|---|----------------------|
| SIGNALLING IN THE INTERNATIONAL MANUAL SERVICE | Q.1–Q.3 |
| INTERNATIONAL AUTOMATIC AND SEMI-AUTOMATIC WORKING | Q.4–Q.59 |
| FUNCTIONS AND INFORMATION FLOWS FOR SERVICES IN THE ISDN | Q.60–Q.99 |
| CLAUSES APPLICABLE TO ITU-T STANDARD SYSTEMS | Q.100–Q.119 |
| SPECIFICATIONS OF SIGNALLING SYSTEMS No. 4, 5, 6, R1 AND R2 | Q.120–Q.499 |
| DIGITAL EXCHANGES | Q.500–Q.599 |
| INTERWORKING OF SIGNALLING SYSTEMS | Q.600–Q.699 |
| SPECIFICATIONS OF SIGNALLING SYSTEM No. 7 | Q.700–Q.799 |
| Q3 INTERFACE | Q.800–Q.849 |
| DIGITAL SUBSCRIBER SIGNALLING SYSTEM No. 1 | Q.850–Q.999 |
| PUBLIC LAND MOBILE NETWORK | Q.1000–Q.1099 |
| INTERWORKING WITH SATELLITE MOBILE SYSTEMS | Q.1100–Q.1199 |
| INTELLIGENT NETWORK | Q.1200–Q.1699 |
| SIGNALLING REQUIREMENTS AND PROTOCOLS FOR IMT-2000 | Q.1700–Q.1799 |
| SPECIFICATIONS OF SIGNALLING RELATED TO BEARER INDEPENDENT CALL CONTROL (BICC) | Q.1900–Q.1999 |
| BROADBAND ISDN | Q.2000–Q.2999 |
| SIGNALLING REQUIREMENTS AND PROTOCOLS FOR THE NGN | Q.3000–Q.3999 |
| General | Q.3000–Q.3029 |
| Network signalling and control functional architecture | Q.3030–Q.3099 |
| Network data organization within the NGN | Q.3100–Q.3129 |
| Bearer control signalling | Q.3130–Q.3179 |
| Signalling and control requirements and protocols to support attachment in NGN environments | Q.3200–Q.3249 |
| Resource control protocols | Q.3300–Q.3369 |
| Service and session control protocols | Q.3400–Q.3499 |
| Service and session control protocols – supplementary services | Q.3600–Q.3649 |
| NGN applications | Q.3700–Q.3849 |
| Testing for next generation networks | Q.3900–Q.3999 |

For further details, please refer to the list of ITU-T Recommendations.

Recommendation ITU-T Q.3300

Architectural framework for the Q.330x series of Recommendations

Summary

Recommendation ITU-T Q.3300 v2 provides a framework by means of which the reader may understand the relationships between the various Recommendations of the Q.330x series. It defines the entities involved in resource control signalling and the interfaces across which signalling occurs. Appendix I provides a cross-reference between the interfaces defined in the main body of this Recommendation and the Recommendations defining the protocols operating across those interfaces.

NOTE – This Recommendation was initially published as Recommendation ITU-T Q.3320, and was later renumbered and republished as ITU-T Q.3300 v2 with an updated title.

History

| Edition | Recommendation | Approval | Study Group |
|---------|-----------------|------------|-------------|
| 1.0 | ITU-T Q.3300 | 2008-01-23 | 11 |
| 2.0 | ITU-T Q.3320 | 2010-03-01 | 11 |
| 2.0 | ITU-T Q.3300 v2 | 2010-03-01 | 11 |

Keywords

Physical entity, RACF.

FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2013

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

Table of Contents

| | Page |
|---|-------------|
| 1 Scope | 1 |
| 2 References..... | 1 |
| 3 Definitions | 1 |
| 3.1 Terms defined elsewhere..... | 1 |
| 3.2 Terms defined in this Recommendation..... | 2 |
| 4 Abbreviations and acronyms | 2 |
| 5 Conventions | 2 |
| 6 Architectural specification..... | 3 |
| 6.1 ITU-T Y.2111 functional architecture..... | 3 |
| 6.2 Principles of mapping..... | 3 |
| 6.3 Implementations of functional entities | 4 |
| 6.4 Interfaces and protocols..... | 4 |
| Appendix I – Tabulation of resource control protocol Recommendations..... | 5 |
| Appendix II – Example of physical realization of the RACF architecture..... | 6 |
| Bibliography..... | 7 |

Recommendation ITU-T Q.3300

Architectural framework for the Q.330x series of Recommendations

1 Scope

This Recommendation specifies a concrete realization of the functional architecture defined in [ITU-T Y.2111], including: the specification of the physical entities involved in resource control signalling; the interfaces across which signalling takes place; and the mapping between these entities and interfaces and the corresponding functional entities and reference points in [ITU-T Y.2111]. Appendix I provides a table illustrating the mapping between these interfaces and the protocol specifications which realize those interfaces.

NOTE – [ITU-T Y.2111] (11/2008) is a Revision 1 of ITU-T Y.2111 (09/2006), which was the base for [b-ITU-T Q.3300].

2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

[ITU-T Y.2111] Recommendation ITU-T Y.2111 (2008), *Resource and admission control functions in next generation networks*.

3 Definitions

3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

3.1.1 network attachment control entity (NACE) [b-ITU-T Q.3300]: A general term used to refer to a device exercising one of the network attachment control functions (NACF) as defined in clause 7.2.2 of [ITU-T Y.2111].

NOTE – These functions may be distributed over multiple devices, but identification of specific devices is unnecessary so long as the necessary information flows are supported over the Ru interface.

3.1.2 policy decision physical entity (PD-PE) [b-ITU-T Q.3300]: A device that implements the policy decision functional entity (PD-FE) as defined in clause 7.2.3.2 of [ITU-T Y.2111].

3.1.3 policy enforcement physical entity (PE-PE) [b-ITU-T Q.3300]: A device that implements the policy enforcement functional entity (PE-FE) as defined in clause 7.2.4.1 of [ITU-T Y.2111].

NOTE – One example of such a device is a border router.

3.1.4 transport physical entity (T-PE) [b-ITU-T Q.3300]: A term used to refer to any device implementing the transport functions in the limited sense provided in clause 7.2.4 of [ITU-T Y.2111] (i.e., those with which the RACF interacts).

3.1.5 transport resource control physical entity (TRC-PE) [b-ITU-T Q.3300]: A device that implements the transport resource control functional entity (TRC-FE) as defined in clause 7.2.3.3 of [ITU-T Y.2111].

3.1.6 transport resource enforcement physical entity (TRE-PE) [b-ITU-T Q.3300]: A device that implements the transport resource enforcement functional entity (TRC-FE) as defined in clause 7.2.4.2 of [ITU-T Y.2111].

3.2 Terms defined in this Recommendation

This Recommendation defines the following term:

3.2.1 CPN gateway policy enforcement physical entity (CGPE-PE): A device that implements the CPN gateway policy enforcement functional entity (CGPE-FE) as defined in clause 7.2.4.2 of [ITU-T Y.2111].

4 Abbreviations and acronyms

This Recommendation uses the following abbreviations and acronyms:

| | |
|--------|---|
| CGPE | CPN Gateway Policy Enforcement |
| CPN | Customer Premises Network |
| FE | Functional Entity |
| NACE | Network Attachment Control Entity |
| NACF | Network Attachment Control Functions |
| PD-FE | Policy Decision Functional Entity |
| PD-PE | Policy Decision Physical Entity |
| PE | Physical Entity |
| RACF | Resource Admission and Control Function |
| SCE | Service Control Entity (e.g., implementation of a P-CSCF) |
| SCF | Service Control Functions (as used in [ITU-T Y.2111]) |
| TF | Transport Functions (as used in [ITU-T Y.2111]) |
| T-PE | Transport Physical Entity (e.g., a router) |
| TRC-FE | Transport Resource Control Functional Entity |
| TRC-PE | Transport Resource Control Physical Entity |


5 Conventions

None.

6 Architectural specification

6.1 ITU-T Y.2111 functional architecture

Figure 6-1 illustrates the RACF functional architecture defined in [ITU-T Y.2111].

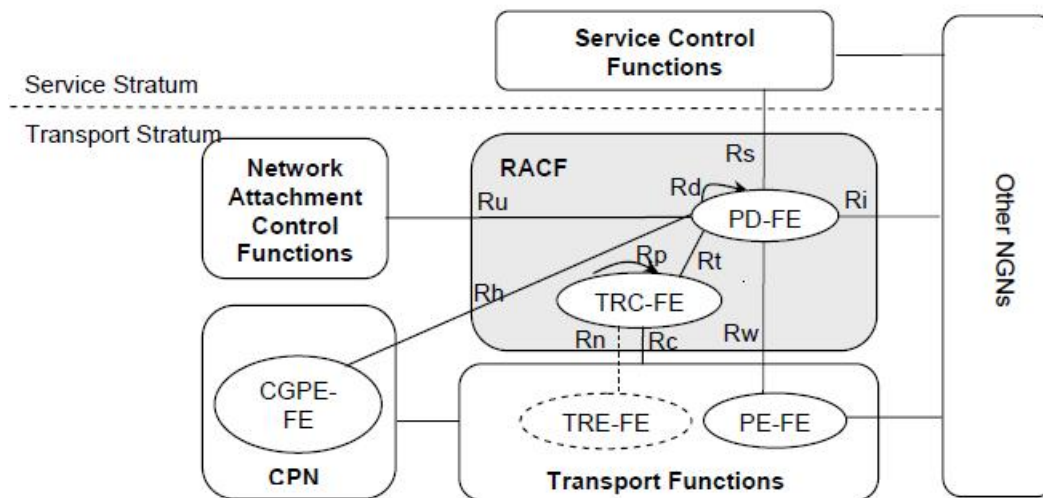

Taken from Figure 5 of [ITU-T Y.2111].

Figure 6-1 – Generic resource and admission control functional architecture in NGN

The relevant functional entities are:

- SCF (service control functions)
- PD-FE (policy decision functional entity)
- TRC-FE (transport resource control functional entity)
- TRE-FE (transport resource enforcement functional entity)
- PE-FE (policy enforcement functional entity)
- CGPE-FE (CPN gateway policy enforcement functional entity)
- NACF (network attachment control functions)

6.2 Principles of mapping

The realization presented in this Recommendation accepts the considerations of scalability and domain independence that motivated the development of the functional architecture. As a result, it maps each functional entity of the functional architecture to a separate type of physical entity. Furthermore, each reference point is assumed to map to a separate interface. At a particular interface one protocol, from a set of recommended protocols, may be used. Because the mapping between reference points and interfaces is one-to-one, each interface is named after the reference point to which it corresponds (e.g., Rs interface corresponding to the Rs reference point).

Depending on the technology involved, some of the physical entities identified in this Recommendation could be combined. In such a case, each combined entity will support the combined set of external interfaces of its component elements. Note that interfaces that would lie between the component elements if they were separate are absorbed into the interior of the combined entity.

6.3 Implementations of functional entities

Table 6-1 indicates the mapping from the functional entities to the physical entities implementing them.

Table 6-1 – Mapping from functional to physical entities concerned with resource admission and control

| Functional entity | Abbrev. | Physical entity | Abbrev. |
|--|---------|---|---------|
| Service Control Functions | SCF | Service Control Entity (e.g., implementation of P-CSCF) | SCE |
| Network Attachment Control Functions | NACF | Network Attachment Control Entity | NACE |
| Policy Decision Functional Entity | PD-FE | Policy Decision Physical Entity | PD-PE |
| Transport Resource Control Functional Entity | TRC-FE | Transport Resource Control Physical Entity | TRC-PE |
| Transport Resource Enforcement Functional Entity | TRE-FE | Transport Resource Enforcement Physical Entity | TRE-PE |
| Transport Functions in general | TF | Transport Physical Entity (of various types, possibly limited by context) | T-PE |
| Policy Enforcement Functional Entity | PE-FE | Policy Enforcement Physical Entity | PE-PE |
| CPN Gateway Policy Enforcement Functional Entity | CGPE-FE | CPN Gateway Policy Enforcement Physical Entity | CGPE-PE |

Clause 7.1 of [ITU-T Y.2111] implies a number of relationships between the physical entities named in Table 6-1. These relationships are listed here and illustrated in Figure II.1 below:

- One PD-PE may serve SCE belonging to multiple service stratum service providers (where each SCE is individually owned by a particular service provider).
- Multiple PD-PEs within the same domain may be interconnected via the Rd interface.
- One PD-PE can communicate directly with one or several TRC-PEs belonging to the same network operator's domain, and a TRC-PE may communicate directly with multiple PD-PEs.
- A mode of operation is possible, whereby for a specific request for the allocation of QoS resources, the PD-PE contacts a single TRC-PE. The TRC-PE then communicates to other TRC-PEs via the Rp interface as required to fulfil the request.

Appendix II contains an example of configuration of the physical entities identified in Table 6-1 and the interfaces between them.

6.4 Interfaces and protocols

A cross-reference between the interfaces defined in this Recommendation, the protocols used at those interfaces, and the Recommendations within which those protocols are documented, is provided in Appendix I.

Appendix I

Tabulation of resource control protocol Recommendations

(This appendix does not form an integral part of this Recommendation.)

Table I.1 lists Recommendations which define protocols applicable to each resource control interface specified in the body of this Recommendation.

Table I.1 – Resource control protocol Recommendations


| Interface | Supporting entities | Protocol base (Notes) | Rec. No. |
|---|-------------------------------|--------------------------------|--------------------|
| Rs | SC-PE, PD-PE | Diameter | [b-ITU-T Q.3301.1] |
| Rp | Between TRC-PEs | RCIP | TBD |
| Rw | PD-PE, PE-PE | – | TBD |
| | | COPS-PR | TBD |
| | | H.248 | TBD |
| | | Diameter | TBD |
| Rc | TRC-PE, T-PE | COPS-PR | TBD |
| | | SNMP | TBD |
| Rt | PD-PE, TRC-PE | Diameter | TBD |
| Rd | PD-PE to PD-PE (intra-domain) | Diameter | [b-ITU-T Q.3306.1] |
| Ri | PD-PE to PD-PE (inter-domain) | Diameter | [b-ITU-T Q.3307.1] |
| Rh | PD-PE to CGPE-PE | Interface is for further study | TBD |
| Rn | TRC-PE, TRE-PE | Interface is for further study | – |
| NOTE 1 – Diameter: [b-IETF RFC 3588]. NOTE 2 – COPS-PR: Common Open Policy Service – Policy Provisioning ([b-IETF RFC 2748], [b-IETF RFC 3084]). NOTE 3 – SNMP: Simple Network Management Protocol ([b-IETF RFC 3410] and others). NOTE 4 – RCIP: Resource Connection Initiation Protocol. | | | |

Appendix II

Example of physical realization of the RACF architecture

(This appendix does not form an integral part of this Recommendation.)

Figure II.1 shows an example of the physical realization of entities identified in Table 6-1 and the interfaces between them. The actual configuration may vary according to the needs of the network operator(s) concerned.

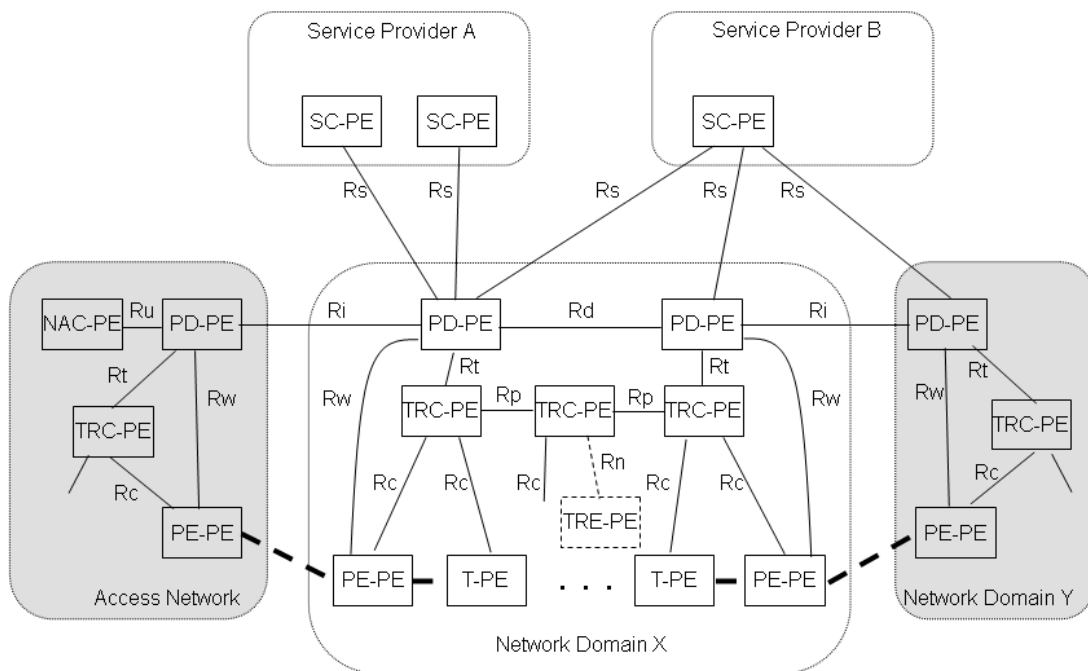

The heavy dashed lines denote packet flows.
NOTE – The Rn interface is for further study.

Figure II.1 – Example physical realization of the RACF architecture

Bibliography

- [b-ITU-T Q.3300] Recommendation ITU-T Q.3300 (2008), *Architectural framework for the Q.33xx series of Recommendations*.
- [b-ITU-T Q.3301.1] Recommendation ITU-T Q.3301.1 v2 (2010), *Resource control protocol No. 1, version 2 – Protocol at the Rs interface between service control entities and the policy decision physical entity*.
- [b-ITU-T Q.3306.1] Recommendation ITU-T Q.3306.1 (2009), *Resource control protocol No. 6 (rcp6) – Protocol at the interface between intra-domain policy decision physical entities (PD-PE) (Rd interface)*.
- [b-ITU-T Q.3307.1] Recommendation ITU-T Q.3307.1 (2009), *Resource control protocol No. 7 – Protocol at the interface between inter-domain policy decision physical entities (Ri interface)*.
- [b-IETF RFC 2748] IETF RFC 2748 (2000), *The COPS (Common Open Policy Service) Protocol*.
- [b-IETF RFC 3084] IETF RFC 3084 (2001), *COPS Usage for Policy Provisioning (COPS-PR)*.
- [b-IETF RFC 3410] IETF RFC 3410 (2002), *Introduction and Applicability Statements for Internet Standard Management Framework*.
- [b-IETF RFC 3588] IETF RFC 3588 (2003), *Diameter Base Protocol*.

SERIES OF ITU-T RECOMMENDATIONS

| | |
|-----------------|---|
| Series A | Organization of the work of ITU-T |
| Series D | General tariff principles |
| Series E | Overall network operation, telephone service, service operation and human factors |
| Series F | Non-telephone telecommunication services |
| Series G | Transmission systems and media, digital systems and networks |
| Series H | Audiovisual and multimedia systems |
| Series I | Integrated services digital network |
| Series J | Cable networks and transmission of television, sound programme and other multimedia signals |
| Series K | Protection against interference |
| Series L | Construction, installation and protection of cables and other elements of outside plant |
| Series M | Telecommunication management, including TMN and network maintenance |
| Series N | Maintenance: international sound programme and television transmission circuits |
| Series O | Specifications of measuring equipment |
| Series P | Terminals and subjective and objective assessment methods |
| Series Q | Switching and signalling |
| Series R | Telegraph transmission |
| Series S | Telegraph services terminal equipment |
| Series T | Terminals for telematic services |
| Series U | Telegraph switching |
| Series V | Data communication over the telephone network |
| Series X | Data networks, open system communications and security |
| Series Y | Global information infrastructure, Internet protocol aspects and next-generation networks |
| Series Z | Languages and general software aspects for telecommunication systems |