

International Telecommunication Union

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**Y.3811**

(09/2022)

SERIES Y: GLOBAL INFORMATION  
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS,  
NEXT-GENERATION NETWORKS, INTERNET OF  
THINGS AND SMART CITIES

Quantum key distribution networks

---

**Quantum key distribution networks – Functional  
architecture for quality of service assurance**

Recommendation ITU-T Y.3811

ITU-T



ITU-T Y-SERIES RECOMMENDATIONS

**GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS, NEXT-GENERATION NETWORKS, INTERNET OF THINGS AND SMART CITIES**

<b>GLOBAL INFORMATION INFRASTRUCTURE</b>	
General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899
<b>INTERNET PROTOCOL ASPECTS</b>	
General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299
Transport	Y.1300–Y.1399
Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
IPTV over NGN	Y.1900–Y.1999
<b>NEXT GENERATION NETWORKS</b>	
Frameworks and functional architecture models	Y.2000–Y.2099
Quality of Service and performance	Y.2100–Y.2199
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Enhancements to NGN	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Computing power networks	Y.2500–Y.2599
Packet-based Networks	Y.2600–Y.2699
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899
Carrier grade open environment	Y.2900–Y.2999
<b>FUTURE NETWORKS</b>	<b>Y.3000–Y.3499</b>
<b>CLOUD COMPUTING</b>	<b>Y.3500–Y.3599</b>
<b>BIG DATA</b>	<b>Y.3600–Y.3799</b>
<b>QUANTUM KEY DISTRIBUTION NETWORKS</b>	<b>Y.3800–Y.3999</b>
<b>INTERNET OF THINGS AND SMART CITIES AND COMMUNITIES</b>	
General	Y.4000–Y.4049
Definitions and terminologies	Y.4050–Y.4099
Requirements and use cases	Y.4100–Y.4249
Infrastructure, connectivity and networks	Y.4250–Y.4399
Frameworks, architectures and protocols	Y.4400–Y.4549
Services, applications, computation and data processing	Y.4550–Y.4699
Management, control and performance	Y.4700–Y.4799
Identification and security	Y.4800–Y.4899
Evaluation and assessment	Y.4900–Y.4999

*For further details, please refer to the list of ITU-T Recommendations.*

# Recommendation ITU-T Y.3811

## Quantum key distribution networks – Functional architecture for quality of service assurance

### Summary

Recommendation ITU-T Y.3811 specifies the functional architecture of quality of service (QoS) assurance for the quantum key distribution networks (QKDNs).

This Recommendation first provides an overview of the functional architecture of QoS assurance for the QKDN. It then describes the functional architecture of QoS assurance which includes functional entities such as QoS data collection, data processing, data storage, data analytics, QoS anomaly detection and prediction, QoS policy decision making, and enforcement and reporting. Based on the functional entities described in the functional architecture, this Recommendation specifies a basic operational procedure of QoS assurance for the QKDN.

### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T Y.3811	2022-09-29	13	<a href="http://handle.itu.int/11.1002/1000/15064">11.1002/1000/15064</a>

### Keywords

Functional architecture, QKDN, QoS assurance.

---

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

In this Recommendation, the expression "Administration" is used for conciseness to indicate both a telecommunication administration and a recognized operating agency.

Compliance with this Recommendation is voluntary. However, the Recommendation may contain certain mandatory provisions (to ensure, e.g., interoperability or applicability) and compliance with the Recommendation is achieved when all of these mandatory provisions are met. The words "shall" or some other obligatory language such as "must" and the negative equivalents are used to express requirements. The use of such words does not suggest that compliance with the Recommendation is required of any party.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this Recommendation may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the Recommendation development process.

As of the date of approval of this Recommendation, ITU had received notice of intellectual property, protected by patents/software copyrights, which may be required to implement this Recommendation. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the appropriate ITU-T databases available via the ITU-T website at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2022

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	<b>Page</b>
1 Scope .....	1
2 References.....	1
3 Definitions .....	1
3.1 Terms defined elsewhere.....	1
3.2 Terms defined in this Recommendation.....	2
4 Abbreviations and acronyms .....	2
5 Conventions .....	3
6 Overview .....	3
7 Functional architecture of QoS assurance for QKDN.....	3
7.1 Functional entities for QoS assurance management.....	4
8 Reference points of the functional architecture.....	7
9 Basic operational procedure of QoS assurance for QKDN .....	8
10 Security considerations.....	10
Bibliography.....	11



# Recommendation ITU-T Y.3811

## Quantum key distribution networks – Functional architecture for quality of service assurance

### 1 Scope

This Recommendation specifies the functional architecture of quality of service (QoS) assurance for the quantum key distribution network (QKDN), the scope of this Recommendation is as follows:

- Overview of QoS assurance for QKDN.
- Functional architecture of QoS assurance for QKDN.
- Reference points of functional architecture.
- Basic operational procedure of QoS assurance for QKDN.

### 2 References

The following ITU-T Recommendations and other references contain provisions which, through reference in this text, constitute provisions of this Recommendation. At the time of publication, the editions indicated were valid. All Recommendations and other references are subject to revision; users of this Recommendation are therefore encouraged to investigate the possibility of applying the most recent edition of the Recommendations and other references listed below. A list of the currently valid ITU-T Recommendations is regularly published. The reference to a document within this Recommendation does not give it, as a stand-alone document, the status of a Recommendation.

[ITU -T E.860] Recommendation ITU-T E.860 (2002), *Framework of a service level agreement*.

[ITU-T Y.3802] Recommendation ITU-T Y.3802 (2020), *Quantum key distribution networks – Functional architecture*.

[ITU-T Y.3806] Recommendation ITU-T Y.3806 (2021), *Quantum key distribution networks – Requirements for quality of service assurance*.

### 3 Definitions

#### 3.1 Terms defined elsewhere

This Recommendation uses the following terms defined elsewhere:

**3.1.1 assurance** [b-ITU-T X.1500]: The degree of confidence that the process or deliverable meets defined characteristics or objectives.

**3.1.2 network performance** [b-ITU-T E.417]: The performance of a portion of a telecommunications network that is measured between a pair of network-user or network-network interfaces using objectively defined and observed performance parameters.

**3.1.3 quality of experience (QoE)** [b-ITU-T P.10]: The degree of delight or annoyance of the user of an application or service. [b-Qualinet 2013]

NOTE – Recognizing on-going research on this topic, this is a working definition which is expected to evolve for some time. (This note is not part of the definition.)

**3.1.4 quality of service** [b-ITU-T Q.1741.9]: The collective effect of service performances, which determine the degree of satisfaction of a user of a service. It is characterized by the combined aspects of performance factors applicable to all services, such as: service operability performance, service accessibility performance, service retainability performance, service integrity performance and other factors specific to service.

### **3.2 Terms defined in this Recommendation**

None.

## **4 Abbreviations and acronyms**

This Recommendation uses the following abbreviations and acronyms:

E2E	End to End
KM	Key Manager
KMA	Key Management Agent
KML	Key Management Layer
KPI	Key Performance Indicator
KQM	KML QoS Measurement
KSA	Key Supply Agent
PQ	Priority Queuing
QBER	Quantum Bit Error Rate
QCL	Quantum Control Layer
QCLQA	QKDN Control Layer QoS Assurance
QCRQA	QKDN Cross-Layer QoS Assurance
QDA	CL QoS Data Analysis
QKD	Quantum Key Distribution
QKDN	Quantum Key Distribution Network
QL	Quantum Layer
QoE	Quality of Experience
QoS	Quality of Service
QPP	QoS Policy Provisioning
QQCE	QKDN QoS Capabilities Exposure
QQCLS	QKDN QoS Cross-Layer Support
QQM	QL QoS Measurement
QQPO	QKDN QoS Planning and Optimization
SLA	Service Level Agreement
WRED	Weighted Random Early Detection
WRR	Weighted Round Robin



## **5 Conventions**

None.

## **6 Overview**


The quantum key distribution network (QKDN) is expected to be able to provide optimized support for a variety of different quantum key distribution (QKD) services. The key performance indicators (KPIs) include optimal latency, accuracy, throughput and availability for key distribution.

One of the challenges of the QKDN is to assure the network performance and that different quality of service (QoS)/quality of experience (QoE) requirements of different application scenarios are met.

The requirements of QoS assurance for the QKDN specified in [ITU-T Y.3806] address these challenges. Based on the requirements, this Recommendation specifies the functional architecture, associated functional entities and reference points and an example of operational procedure.

## **7 Functional architecture of QoS assurance for QKDN**


This clause defines the QKDN layered functional architecture and associated functional entities in accordance with [ITU-T Y.3802]. This Recommendation extends the functional entities required for QoS assurance as shown in Figure 1, where the QoS assurance functional element is added in each layer management function. Each element interacts with each layer's control and management function to fulfil the QoS KPIs. This includes planning, monitoring, analysing, optimizing and provisioning.

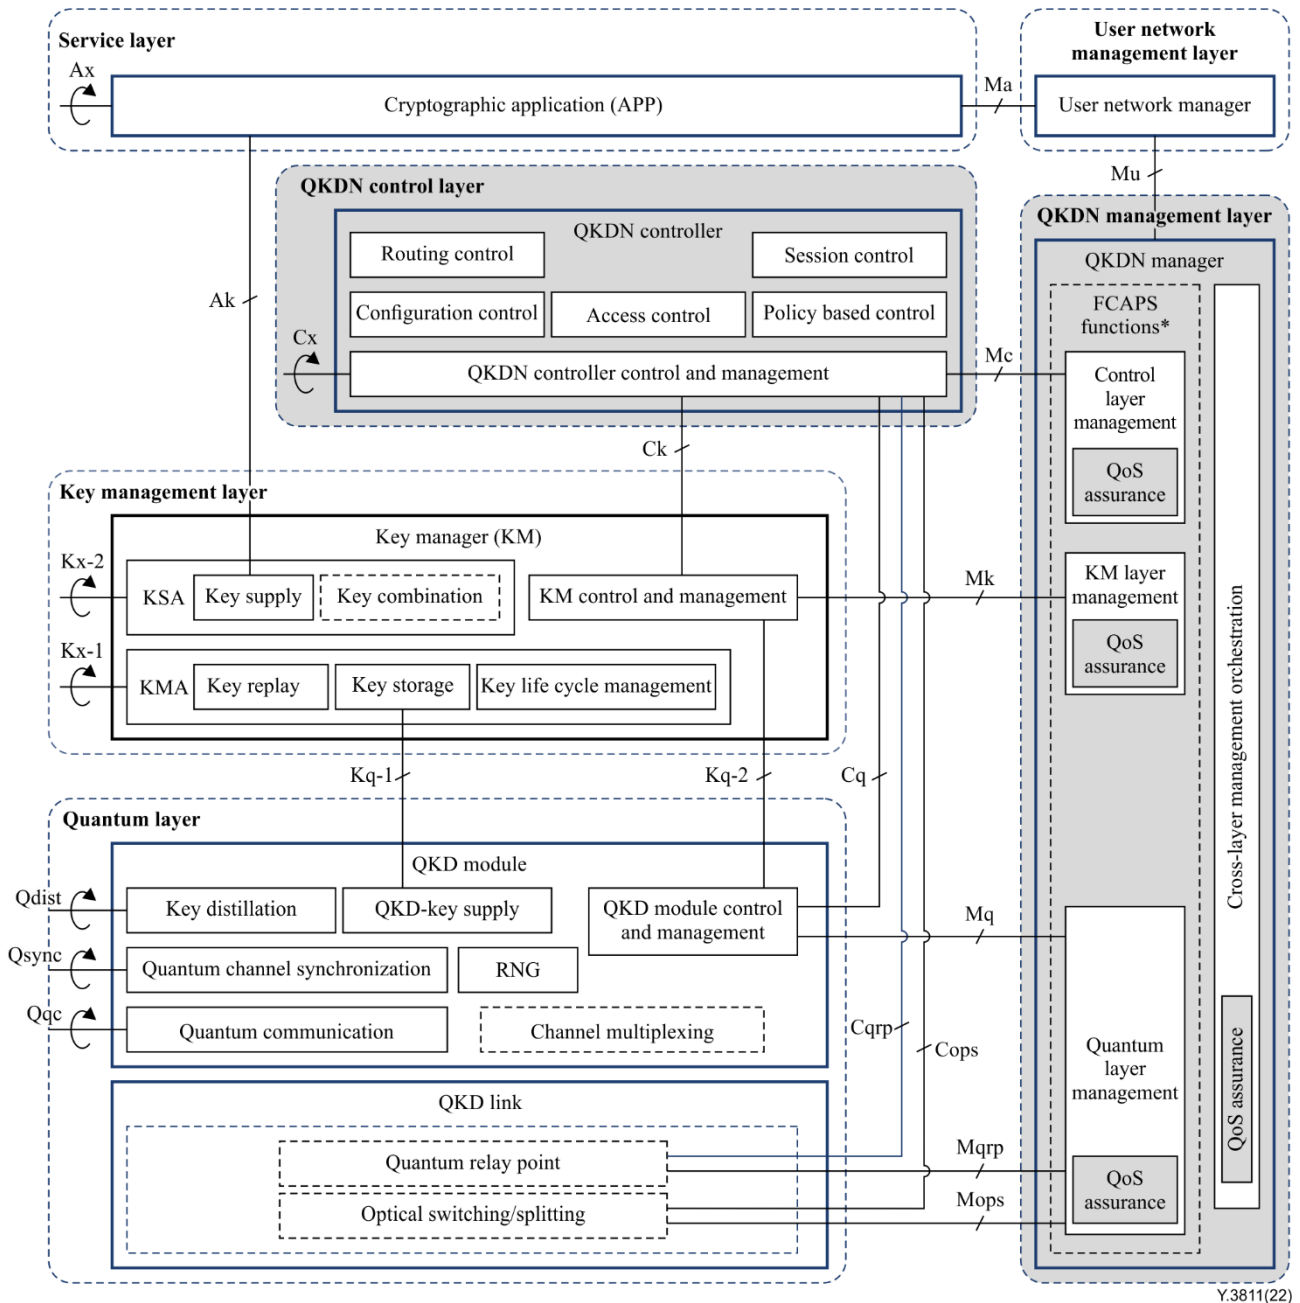

**Figure 1 – Functional architecture of QoS assurance for QKDN**

### 7.1 Functional entities for QoS assurance management

The QoS assurance management functional entities are shown in Figure 2. The QKDN control layer QoS assurance functional entities include: QoS data analysis, QoS policy generation, and QoS policy provisioning functions. The key management layer QoS assurance functional entities include: key management layer (KML) QoS measurement, KML QoS policy enforcement, and KML QoS mapping and abstraction functions. The quantum layer QoS assurance functional entities include: quantum layer (QL) QoS measurement, QL QoS policy enforcement and QL QoS mapping and abstraction. The cross-layer management and orchestration QoS assurance functional entities include: QKDN QoS capability exposure to external management systems, QKDN service level agreement (SLA) support, QKDN QoS planning and optimization, and QKDN QoS cross-layer support functions.

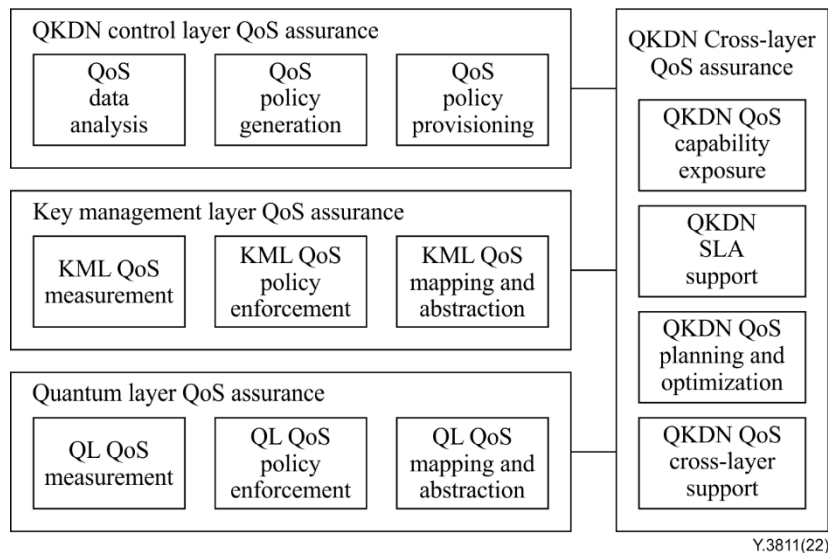

**Figure 2 – QKDN QoS assurance functional entities**

### 7.1.1 QKDN control layer QoS assurance functional entity

The QKDN control layer QoS assurance functional entity includes the following functions:

- **QoS data analysis**

The QoS data analysis functional entity receives QoS related information from the QL and KML QoS measurement functional entity and performs analysis for QoS assurance. For example, it can construct a correlation relationship between QoS information and QoS anomalies.

Based on such analysis, it can detect QoS related anomalies which can be utilized for achieving QoS assurance of the QKDN.

- **QoS policy generation**

The QoS policy generation functional entity generates QoS policies to guarantee the quality of QKDN services based on the analysed results supplied by the QoS data analysis functional entity. The policies include KML QoS policies and QL QoS policies. They are delivered to the corresponding layer's QoS enforcement functional entity for further layer specific enforcement.

- **QoS policy provisioning**

The QoS policy provisioning functional entity translates its QoS policies to the resource-facing key management layer (KML) and QL specific rules to enforce QoS assurance control, QoS interworking and mapping, and efficient end-to-end (E2E) QoS provisioning. It then triggers each layer QoS policy enforcement functional entity to complete provisioning processes. It also performs verification of the intended provisioning.

### 7.1.2 Key management layer QoS assurance functional entity

The QKDN key management layer QoS assurance functional entity includes the following functions:

- **KML QoS measurement**

The KML QoS measurement functional entity collects static information of QKDN KML physical or virtual resources such as name, location, IP addresses, manufacturing date, etc. It also monitors and collects dynamic information of QKDN KML configuration, fault, performance and security events. More specifically, it collects various KML performance data such as key management agent (KMA), key supply agent (KSA) link delay, loss rate, and throughput, etc. The KML QoS measurement functional entity sends the information to the QoS data analysis functional entity for further processing.

- **KML QoS policy enforcement**

The KML QoS policy enforcement functional entity enforces KML QoS policy sent from the control layer. It is mainly focused on queue management associated with KML links such as KMA and KSA links. An important goal of queue management is to minimize the steady-state queue size while not under-utilizing the link as well as avoiding the lock-out phenomenon where a single connection or flow monopolizes the queue space. The detailed QoS enforcement functions include packet marking, congestion avoidance, queue shaping, and queue scheduling with a finer level of QoS granularities (e.g., per-flow). Schemes for queue management differ mainly in the criteria for dropping packets and what packets should be dropped. The use of multiple queues introduces further variation in the schemes, for example, in the way packets are distributed among the queues. It can utilize a weighted random early detection (WRED) queue management algorithm, priority queuing (PQ), and weighted round robin (WRR) queue scheduling algorithms.

- **KML QoS mapping and abstraction**

The KML QoS mapping and abstraction functional entity is used to support proper QoS interworking between networks that packets traverse in different network domains (e.g., mapping key management (KM) access network QoS classes to KM backbone network QoS classes). The QoS class can be associated with three attributes: priority, packet delay budget and packet error loss rate.

### 7.1.3 Quantum layer QoS assurance functional entity

The QKDN quantum layer QoS assurance functional entity includes the following functions:

- **QL QoS measurement**

The QL QoS measurement functional entity collects static information of QKDN QL physical or virtual resources such as name, location, IP addresses, manufacturing date, etc. It also monitors and collects dynamic information of QKDN QL configuration, fault, performance and security events. More specifically, it collects various QL performance data such as link distance, link complexity, noise, secure key rate, quantum bit error rate (QBER), operating frequency, etc. The QL QoS measurement functional entity sends the information to the QoS data analysis functional entity for further processing.

- **QL QoS policy enforcement**

The QL QoS enforcement functional entity enforces QL QoS policy sent from the QoS policy provisioning functional entity in the QKDN control layer. It mainly focuses on queue management associated with quantum and classical channels. An important goal of queue management is to minimize the steady-state queue size while not under-utilizing the link as well as avoiding the lock-out phenomenon where a single connection or flow monopolizes the queue space. The detailed QoS enforcement functions include packet marking, congestion avoidance, queue shaping, and queue scheduling with a finer level of QoS granularities (e.g., per-flow). Schemes for queue management differ mainly in the criteria for dropping packets and what packets should be dropped. The use of multiple queues introduces further variation in the schemes, for example, in the way packets are distributed among the queues. It can utilize the WRED queue management algorithm, PQ, and WRR queue scheduling algorithms.

- **QL QoS mapping and abstraction**

The QL QoS mapping and abstraction functional entity is used to support proper QoS interworking between networks that packets traverse in different network domains (e.g., mapping quantum access network QoS classes to quantum backbone network QoS classes). The QoS class can be associated with three attributes: priority, packet delay budget and packet error loss rate.

#### 7.1.4 QKDN cross-layer QoS assurance functional entity

The QKDN cross-layer QoS assurance functional entity includes the following functions:

- **QKDN QoS capability exposure**

QKDN is expected to bring some new and enhanced capabilities. The opening of QKDN QoS capabilities exposure will bring new business opportunities to QKDN operators, vendors and third parties e.g., QKDN enterprises or value-added operators.

All QoS functions and capabilities can be accessed through service-oriented interfaces which include service registration, service discovery, service request and service deregistration.

- **QKDN SLA support**

The SLA is a formal agreement reached between QKDN service users and the QKDN provider after a negotiating activity with the scope to assess service characteristics, responsibilities and priorities. The SLA may include statements about performance, billing, and service delivery but also legal and economic issues [ITU-T E.860]. The SLA is from the user and service point of view. The QoS policy is from the network point of view. The SLA support functional entity receives the SLAs from the QKDN users, extracts QoS related information (e.g., performance and service delivery conditions) and translates them to QoS policies.

- **QKDN QoS planning and optimization**

The QKDN QoS planning receives the information on real QKDN QL and KML traffic estimates and topology, utilisation of accurate models for control and user data (e.g., key information, etc.) transmissions, and implementation of the actual QKDN functional entities characteristics, functionalities and parameters. QoS planning then provides an estimate of the QKDN coverage, capacity and resources requirements.

The QKDN QoS optimization can update the QoS planning results to improve the overall QKDN quality, the user's QoE and ensure that the QKDN resources are efficiently utilized.

The estimation and optimization results are realized by QoS provisioning in the underlying QKDN.

- **QKDN QoS cross-layer support**

The QKDN QoS cross-layer support functional entity is responsible for managing the correlation of QoS information across QKDN layers. This capability is applicable for QoS provisioning, QoS-based key relay or re-routing analysis, and QoS related fault and security anomaly analysis across multiple layers.

## 8 Reference points of the functional architecture


The following reference points are relevant to communications between a QKDN manager and the QL, KML, and QKDN control layer for the purpose of QoS assurance:

- **Mq**: a reference point connecting the QKDN manager with a QKD module control and management function in a QKD module. It is responsible for the QKDN manager to communicate management information with the QKD module. For QoS assurance, this reference point is extended to support the QoS assurance quantum layer QKD module functionality such as QKD module QoS measurement, QoS policy enforcement, and QoS mapping and abstraction.
- **Mops**: a reference point connecting the QKDN manager and an optical switching/splitting function in a QKD link. It is responsible for the QKDN manager to communicate management information with the QKD link. For QoS assurance, this reference point is extended to support the quantum layer QKD link functionality such as QKD link QoS measurement, QoS policy enforcement, and QoS mapping and abstraction.

- **Mqrp**: a reference point connecting the QKDN manager and a quantum relay function in a QKD link. It is responsible for the QKDN manager to communicate management information on the quantum relay with the QKD link. For QoS assurance, this reference point is extended to support the quantum layer quantum relay functionality such as quantum relay QoS measurement, QoS policy enforcement, and QoS mapping and abstraction.
- **Mk**: a reference point connecting the QKDN manager and a key manager (KM) control and management function in a KM. It is responsible for the QKDN manager to communicate management information with a KMA and a key supply agent (KSA). For QoS assurance, this reference point is extended to support key management layer QoS assurance functionality such as KML QoS measurement, QoS policy enforcement, and QoS mapping and abstraction.
- **Mc**: a reference point connecting the QKDN manager and a QKDN controller control and management function in a QKDN controller. It is responsible for the QKDN manager to communicate management information with the QKDN controller. For QoS assurance, this reference point is extended to support control layer QoS assurance functionality, specifically, QoS policy provisioning.
- **Mu**: a reference point connecting a user network manager in a user network and the QKDN manager in the QKDN. It is responsible for the QKDN manager to communicate management information with the user network manager. For QoS assurance, this reference point is extended to support cross-layer QoS assurance functionality such as QoS capability exposure and SLA support for the user network.

## 9 Basic operational procedure of QoS assurance for QKDN

During the lifecycle of QKDN services, the QKDN QoS assurance lifecycle is also involved. This clause describes a basic operational QoS assurance lifecycle procedure in a QKD network which is shown in Figure 3.

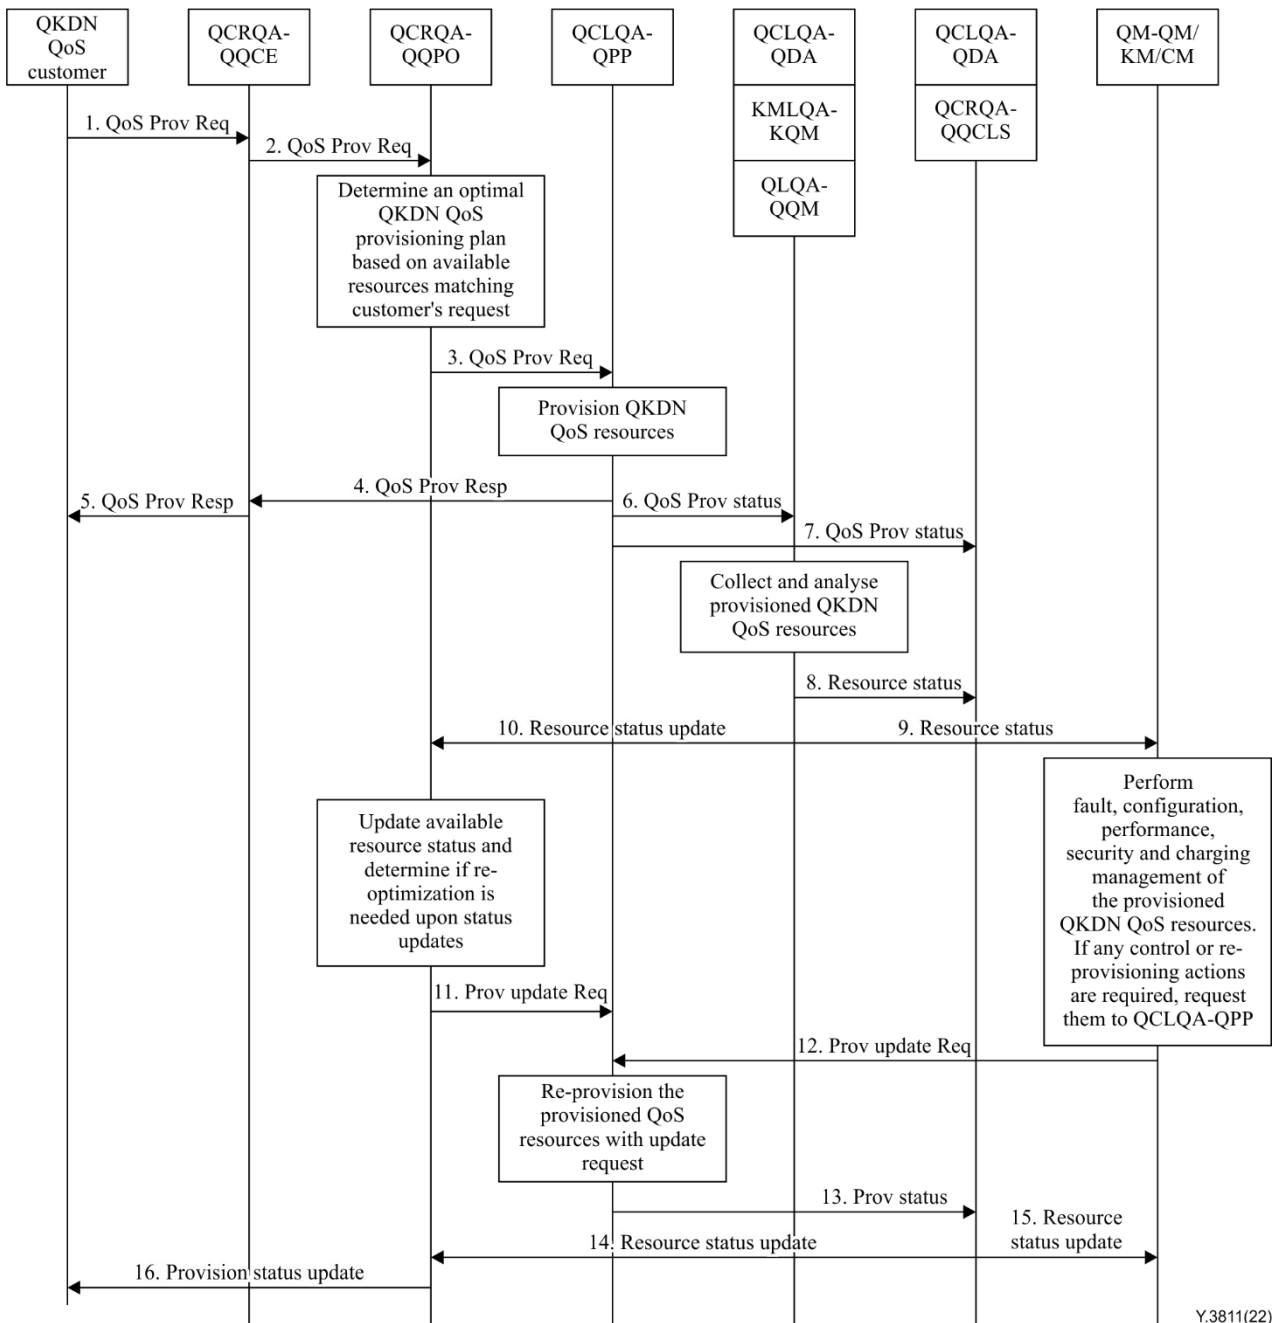

**Figure 3 – A basic operational procedure for QKDN QoS assurance**

- 1) The QKDN customer requests QKDN resources to be provisioned with its specified service requirements based on the SLA between a QKDN customer and a QKDN provider. The QKDN resources to be provisioned include a QoS-enabled key relay route, KML resources to be provisioned with QoS requirements, and QL resources to be provisioned with QoS requirements. The QKDN QoS capabilities exposure (QQCE) functional element in the QKDN cross-layer QoS assurance (QCRQA) functional entity can open the QoS capabilities for third parties. Also the QKDN SLA support functional element provides QoS information in the SLA template for QKDN QoS provisioning which includes: statements about performance, billing, and service delivery.
- 2) The QCRQA-QQCE functional element receives the customer's request and carries it to the QKDN QoS planning and optimization (QQPO) functional element in the QCRQA functional entity.
- 3) After the decision of QoS planning and optimization, the QQPO then determines an optimal QoS resource provisioning plan based on the available resources which matches the

customer's request. Once the provisioning policy is determined, the QQPO requests provisioning to the QoS policy provisioning (QPP) functional element in the QKDN control layer QoS assurance (QCLQA) functional entity.

- 4-5) QPP then performs the requested QoS provisioning task. It involves various sub-tasks including QoS related aspects: QoS provisioning, QoS policy enforcement and QoS mapping, etc. Upon completion of the provisioning process, QPP sends a provision response message to the customer via QQCE.
- 6) At the same time, a provision status is sent to the QL QoS measurement (QQM), KML QoS measurement (KQM), and CL QoS data analysis (QDA) functional elements to initiate the monitoring and analysis of the provisioned resources.
- 7) The status update is also sent to QDA and the QKDN QoS cross-layer support (QQCLS) in the QCRQA functional entity to store the provisioned resource information. Both QDA and QQCLS have a resource repository to store resource status information for their analysis functions.
- 8) QQM, KQM and QDA perform collection, monitoring, and analysis tasks of the provisioned resources. The QoS related data is also collected. Data and information collected and analysed are then stored in both QDA and QQCLS repositories for further processing.
- 9-10) The QoS policy information is also stored in QDA and QQCLS repositories. When QDA and QQCLS receive resource status updates, the updates are stored in the repository and, at the same time, a notification is emitted to all functional elements that are listening to the status updates. In this case, an update notification is sent to QKDN quantum layer management, key management layer management, and control layer management functional entities for fault, configuration, performance, security, and charging purposes, and finally to QQPO for cross-layer QoS management.
- 11) When QQPO receives the notification, it updates the available resource status and determines if re-optimization is needed upon status updates.
- 12) Also when the QM/KM/CM in the QKDN management function receive the notification, they perform fault, configuration, performance, security and charging management of the provisioned resources and determine if any control or re-provisioning actions are required. If so, they send a request to QPP for provisioning update processes.
- 13-15) QPP, upon receiving the provisioning update requests, performs re-provisioning tasks for the provisioned QKDN QoS resources. When the re-provisioning tasks are done, QPP generates the provision status to QDA and QQCLS repositories and they further convey the notification to the QM/KM/CM, QQPO and QKDN QoS customer for resource status updates.
- 16) QQPO finally sends the provision status update to the customer.

## **10 Security considerations**

This Recommendation specifies the functional architecture of QoS assurance for the quantum key distribution networks (QKDNs), therefore, the security aspects of QKDN functional architecture as described in [ITU-T Y.3802] should be applied. Details are outside the scope of this Recommendation.



## Bibliography

- [b-ITU-T E.417] Recommendation ITU-T E.417 (2005), *Framework for the network management of IP-based networks*.
- [b-ITU-T P.10] Recommendation ITU-T P.10/G.100 (2017), *Vocabulary for performance, quality of service and quality of experience*.
- [b-ITU-T Q.1741.9] Recommendation ITU-T Q.1741.9 (2015), *IMT-2000 references to Release 11 of GSM evolved UMTS core network*.
- [b-ITU-T X.1500] Recommendation ITU-T X.1500 (2011), *Overview of cybersecurity information exchange*.
- [b-ITU-T Y.3800] Recommendation ITU-T Y.3800 (2019), *Overview on networks supporting quantum key distribution*.
- [b-ITU-T Y.3801] Recommendation ITU-T Y.3801 (2020), *Functional requirements for quantum key distribution networks*.
- [b-ITU-T Y.3803] Recommendation ITU-T Y.3803 (2020), *Quantum key distribution networks – Key management*.
- [b-ITU-T Y.3804] Recommendation ITU-T Y.3804 (2020), *Quantum key distribution networks – Control and management*.
- [b-ITU-T Y.3807] Recommendation ITU-T Y.3807 (2022), *Quantum key distribution networks – Quality of service parameters*.
- [b-Qualinet 2013] Qualinet *White Paper on Definitions of Quality of Experience* (2013), *Output from the fifth Qualinet meeting*, Novi Sad, March 12.  
[http://www.qualinet.eu/index.php?option=com\\_content&view=article&id=45&Itemid=52](http://www.qualinet.eu/index.php?option=com_content&view=article&id=45&Itemid=52)





## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
<b>Series Y</b>	<b>Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities</b>
Series Z	Languages and general software aspects for telecommunication systems