

International Telecommunication Union

**ITU-T**

TELECOMMUNICATION  
STANDARDIZATION SECTOR  
OF ITU

**Series Y**  
**Supplement 67**  
(07/2020)

SERIES Y: GLOBAL INFORMATION  
INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS,  
NEXT-GENERATION NETWORKS, INTERNET OF  
THINGS AND SMART CITIES

---

**ITU-T Y.3000-series – Representative use cases  
and key network requirements for Network 2030**

ITU-T Y-series Recommendations – Supplement 67

ITU-T



ITU-T Y-SERIES RECOMMENDATIONS

**GLOBAL INFORMATION INFRASTRUCTURE, INTERNET PROTOCOL ASPECTS, NEXT-GENERATION NETWORKS, INTERNET OF THINGS AND SMART CITIES**

GLOBAL INFORMATION INFRASTRUCTURE

General	Y.100–Y.199
Services, applications and middleware	Y.200–Y.299
Network aspects	Y.300–Y.399
Interfaces and protocols	Y.400–Y.499
Numbering, addressing and naming	Y.500–Y.599
Operation, administration and maintenance	Y.600–Y.699
Security	Y.700–Y.799
Performances	Y.800–Y.899

INTERNET PROTOCOL ASPECTS

General	Y.1000–Y.1099
Services and applications	Y.1100–Y.1199
Architecture, access, network capabilities and resource management	Y.1200–Y.1299
Transport	Y.1300–Y.1399
Interworking	Y.1400–Y.1499
Quality of service and network performance	Y.1500–Y.1599
Signalling	Y.1600–Y.1699
Operation, administration and maintenance	Y.1700–Y.1799
Charging	Y.1800–Y.1899
IPTV over NGN	Y.1900–Y.1999

NEXT GENERATION NETWORKS

Frameworks and functional architecture models	Y.2000–Y.2099
Quality of Service and performance	Y.2100–Y.2199
Service aspects: Service capabilities and service architecture	Y.2200–Y.2249
Service aspects: Interoperability of services and networks in NGN	Y.2250–Y.2299
Enhancements to NGN	Y.2300–Y.2399
Network management	Y.2400–Y.2499
Network control architectures and protocols	Y.2500–Y.2599
Packet-based Networks	Y.2600–Y.2699
Security	Y.2700–Y.2799
Generalized mobility	Y.2800–Y.2899
Carrier grade open environment	Y.2900–Y.2999

FUTURE NETWORKS

	Y.3000–Y.3499
--	---------------

CLOUD COMPUTING

	Y.3500–Y.3599
--	---------------

BIG DATA

	Y.3600–Y.3799
--	---------------

QUANTUM KEY DISTRIBUTION NETWORKS

	Y.3800–Y.3999
--	---------------

INTERNET OF THINGS AND SMART CITIES AND COMMUNITIES

General	Y.4000–Y.4049
Definitions and terminologies	Y.4050–Y.4099
Requirements and use cases	Y.4100–Y.4249
Infrastructure, connectivity and networks	Y.4250–Y.4399
Frameworks, architectures and protocols	Y.4400–Y.4549
Services, applications, computation and data processing	Y.4550–Y.4699
Management, control and performance	Y.4700–Y.4799
Identification and security	Y.4800–Y.4899
Evaluation and assessment	Y.4900–Y.4999

*For further details, please refer to the list of ITU-T Recommendations.*

## Supplement 67 to ITU-T Y-series Recommendations

### ITU-T Y.3000-series – Representative use cases and key network requirements for Network 2030

#### Summary

Towards the year of 2030 and beyond, many novel applications are expected to emerge as other applications mature, leading to increasingly intertwined human and machine communications. The new applications usually trigger new services and introduce challenging requirements that demand continuous evolution of networking technologies. Thus, the inherent capabilities of interconnected networks and the running principles therein need to be enhanced, or even replaced, due to these evolving requirements.

To help identify core network requirements and shape the future networks' design paradigm, this supplement summarizes some representative use cases for Network 2030 that have been well selected through group discussions within Subgroup 1 of the ITU-T Focus Group on Network 2030 (FG NET-2030).

Specifically, this supplement presents in Part I the following 7 use cases: holographic type communications (HTC); tactile Internet for remote operations (TIRO); intelligent operation network (ION); network and computing convergence (NCC); digital twin (DT); space-terrestrial integrated network (STIN); industrial IoT (IIoT) with cloudification. Their potential corresponding key network requirements are also stated.

In Part II of this supplement, five overarching abstract requirement dimensions are proposed and scored relatively in order to compare the requirements of each use case. Through a clustering methodology these dimensions are also presented graphically. Based on this, the most prominent requirements of each case can easily be extracted, and their accumulated statistics are further shown to provide future network designers with a high-level perspective of the diverse dimensions foreseen as requirements of future use cases.

Finally, it is important to note that additional use cases and further details on the presented use cases can be found in the global set of contributions submitted to the ITU-T FG NET-20301.

#### History

Edition	Recommendation	Approval	Study Group	Unique ID*
1.0	ITU-T Y Suppl. 67	2020-07-31	13	<a href="https://www.itu.int/11.1002/1000/11830-en">11.1002/1000/14386</a>

#### Keywords

Network 2030, network requirements, use cases.

---

<sup>1</sup> ITU-T FG NET-2030 home page: <https://www.itu.int/en/ITU-T/focusgroups/net2030/Pages/default.aspx>

\* To access the Recommendation, type the URL <http://handle.itu.int/> in the address field of your web browser, followed by the Recommendation's unique ID. For example, <http://handle.itu.int/11.1002/1000/11830-en>.

## FOREWORD

The International Telecommunication Union (ITU) is the United Nations specialized agency in the field of telecommunications, information and communication technologies (ICTs). The ITU Telecommunication Standardization Sector (ITU-T) is a permanent organ of ITU. ITU-T is responsible for studying technical, operating and tariff questions and issuing Recommendations on them with a view to standardizing telecommunications on a worldwide basis.

The World Telecommunication Standardization Assembly (WTSA), which meets every four years, establishes the topics for study by the ITU-T study groups which, in turn, produce Recommendations on these topics.

The approval of ITU-T Recommendations is covered by the procedure laid down in WTSA Resolution 1.

In some areas of information technology which fall within ITU-T's purview, the necessary standards are prepared on a collaborative basis with ISO and IEC.

## NOTE

This is an informative ITU-T publication. Mandatory provisions, such as those found in ITU-T Recommendations, are outside the scope of this publication. This publication should only be referenced bibliographically in ITU-T Recommendations.

## INTELLECTUAL PROPERTY RIGHTS

ITU draws attention to the possibility that the practice or implementation of this publication may involve the use of a claimed Intellectual Property Right. ITU takes no position concerning the evidence, validity or applicability of claimed Intellectual Property Rights, whether asserted by ITU members or others outside of the publication development process.

As of the date of approval of this publication, ITU had not received notice of intellectual property, protected by patents, which may be required to implement this publication. However, implementers are cautioned that this may not represent the latest information and are therefore strongly urged to consult the TSB patent database at <http://www.itu.int/ITU-T/ipr/>.

© ITU 2020

All rights reserved. No part of this publication may be reproduced, by any means whatsoever, without the prior written permission of ITU.

## Table of Contents

	<b>Page</b>
1 Scope .....	1
2 References.....	1
3 Definitions .....	1
4 Abbreviations and acronyms .....	1
5 Conventions .....	2
Part I: Representative use cases with key network requirements .....	2
I.1 Holographic type communications (HTC) .....	2
I.2 Tactile Internet for remote operations (TIRO) .....	4
I.3 Intelligent operation network (ION).....	5
I.4 Network and computing convergence (NCC) .....	7
I.5 Digital twins (DT) .....	8
I.6 Space-terrestrial integrated network (STIN) .....	10
I.7 Industrial IoT (IIoT) with cloudification.....	12
Part II: Use case requirement scoring and analysis.....	13
II.1 Graphic representations of the network requirements.....	13
II.2 Rationale for consideration of the five abstract requirement dimensions .....	15
II.3 Detailed analysis of the individual use cases .....	16
Conclusion .....	18
Bibliography.....	19



# Supplement 67 to ITU-T Y-series Recommendations

## ITU-T Y.3000-series – Representative use cases and key network requirements for Network 2030

### 1 Scope

This supplement has two parts.

In Part I, seven representative use cases with their potential key network requirements are presented:

- holographic type communications (HTC)
- tactile Internet for remote operations (TIRO)
- intelligent Operation Network (ION)
- network and computing convergence (NCC)
- digital twin (DT)
- space-terrestrial integrated network (STIN)
- industrial IoT (IIoT) with cloudification.

Then, in Part II, five overarching abstract requirement dimensions are proposed and scored relatively in order to compare the requirements of each use case graphically. The rationale for consideration of these abstract dimensions is stated in detail, as well as an analysis of each use case from the abstract dimension perspective.

### 2 References

None.

### 3 Definitions

None.

### 4 Abbreviations and acronyms

This Supplement uses the following abbreviations and acronyms:

AI	Artificial Intelligence
AR	Augmented Reality
CGH	Computer-Generated Holograms
DT	Digital Twin
DTC	Digital Twin City
HMD	Head-Mounted Display
HTC	Holographic Type Communications
ION	Intelligent Operation Network
IIoT	Industrial IoT
IoT	Internet of Things
NCC	Network and Computing Convergence
OT	Operational Technology

PLC	Programmable Logic Controller
STIN	Space-Terrestrial Integrated Network
TIRO	Tactile Internet for Remote Operations
VR	Virtual Reality


## 5 Conventions

None.

### Part I: Representative use cases with key network requirements

#### I.1 Holographic type communications (HTC)

##### I.1.1 Use case description

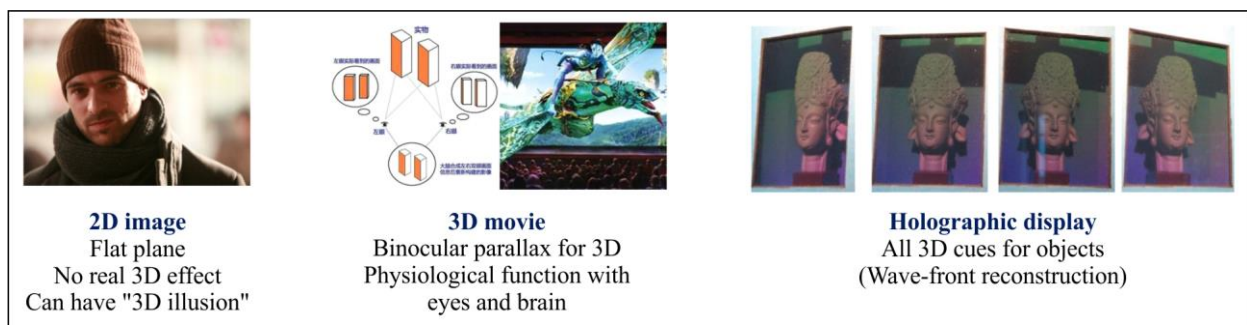


Y Suppl.67(20)\_F01

**Figure 1 – Comparison of human visual perception with 2D and 3D effects**

(Image sources from left to right: Paris (2008 film); Avatar (2009 film); Holographic photo in ISDH2012).

Figure 1 illustrates a simple comparison of human perception of the visual effects for 2D images, traditional 3D movies using binocular parallax, and true holograms, respectively. It can be observed that the holographic display should satisfy all visual cues for human observation of any 3D object, to appear as natural as possible [b-Survey]. In theory, holography is a method of producing a three-dimensional image of a physical object by recording, on a photographic plate or film, the pattern of interference that is formed by a split laser beam and then illuminated either with a laser or with ordinary light by diffraction. And, such optical holograms are able to record the wavelength (colour) and intensity (amplitude) of light waves, as well as the phase of light waves (perception of depth). However, holography's technological foundation and ecosystem are not mature enough at present. Over the coming decade, the motivation of enabling a fully immersive experience will lead to the adoption of lenslet light-field 3D through the naked eye or indeed through augmented reality (AR) and virtual reality (VR) via head-mounted display (HMD) devices [b-Holoportation].



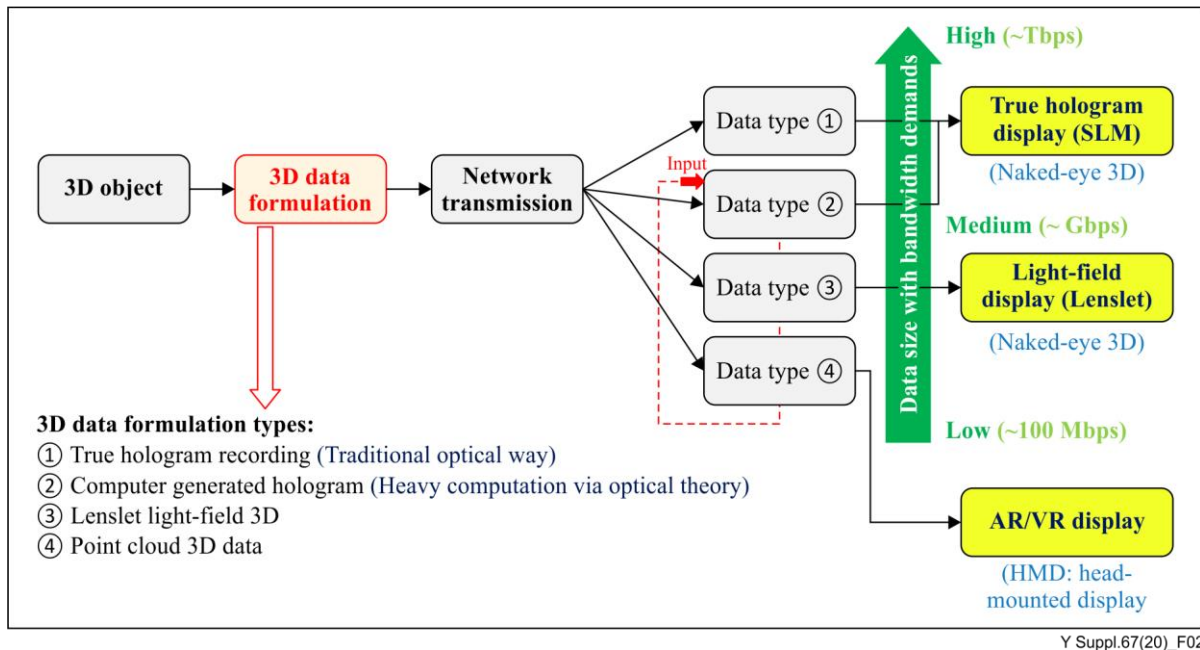

**Figure 2 – Types of 3D data transmission in HTC**

Holographic type communications (HTC) are expected to digitally deliver 3D images from one or multiple sources to one or multiple destination nodes in an interactive manner, so we can foresee that fully immersive 3D imaging will impose great challenges on future networks.

Figure 2 analyses four 3D data types that can be potentially transmitted for end-to-end HTC applications. True holograms will need extremely large data for recording and reconstruction, as will computer-generated holograms (CGH), where traditional holograms are digitized. Both of them potentially demand bandwidth up to the Tbps level [b-Network 2030] for transmission. The lenslet light-field 3D uses lots of parallel views for observing 3D objects, and thus typically requires high bandwidth for data transmission, usually at the Gbps level. As demonstrated in holoportation scenarios [b-Holoportation], the AR/VR-based display with a high definition resolution usually needs bandwidth at tens of Mbps level, while extreme AR/VR with a much higher resolution demands bandwidth at Gbps level. Furthermore, point cloud 3D data, popularly used nowadays for 3D imaging, can serve as the input data of 3D models for a variety of 3D displaying methods such as CGH.

In addition to the bandwidth requirements, other network challenges for HTC are highlighted in the following section.

### **I.1.2 Key network requirements**


- **Bandwidth:** Based on the specific data formats used for different 3D holographic applications, for either perception by the naked eye or HMD-assisted display, HTC bandwidth requirements could vary from tens of Mbps for entry-level point cloud transmission to Gbps for highly immersive AR/VR and light-field 3D scenarios, and may further reach the Tbps level for true hologram transmission at normal human size [b-3D Holographic], [b-Holographic image].
- **Latency:** Ultra-low latency is crucial for truly immersive scenarios to alleviate simulator sickness, especially when HMDs are involved. Furthermore, applications involving real-time communications impose stringent latency requirements on the transmitted media streams. Additionally, the ability to adjust the quality of fields of view in the image array based on user interactivity depends on the network's ability to rapidly adjust streams with a predefined response limit [b-Truly Immersive HTC]. In the near future, HTC might also be further integrated with haptic sense data transmission [b-HaptoClone], which confirms the latency requirement at the sub-ms level (see also the TIRO case).

- **Synchronization:** In order to support multiparty holographic communications or multi-master and single-slave control [b-Teleoperation], multiple transmission paths or data streams with diverse geolocations are expected to be synchronized appropriately with limited arrival time differences, usually at the level of ms time interval.
- **Security:** For many future applications, such as hologram-based remote surgical control, complete security should be guaranteed.
- **Reliability:** In HTC cases, reliability is also essential, especially when critical operations are accompanied.
- **Computation:** Hologram-based displays will often require high computational power to synthesize, render or reconstruct 3D images before being visualised (for example CGH). Hence, edge computing close to the 3D data receiving end points and terminals is a key requirement for HTC.

## I.2 Tactile Internet for remote operations (TIRO)

### I.2.1 Use case description

Tactile Internet envisions the real-time control of remote infrastructure, creating a plethora of opportunities and opening new areas of applications within sectors such as Industry 4.0 or telemedicine. Immersive video streaming applications, such as the aforementioned HTC 3D image streaming, will enable real-time and immersive interaction between a human operator and remote machinery.

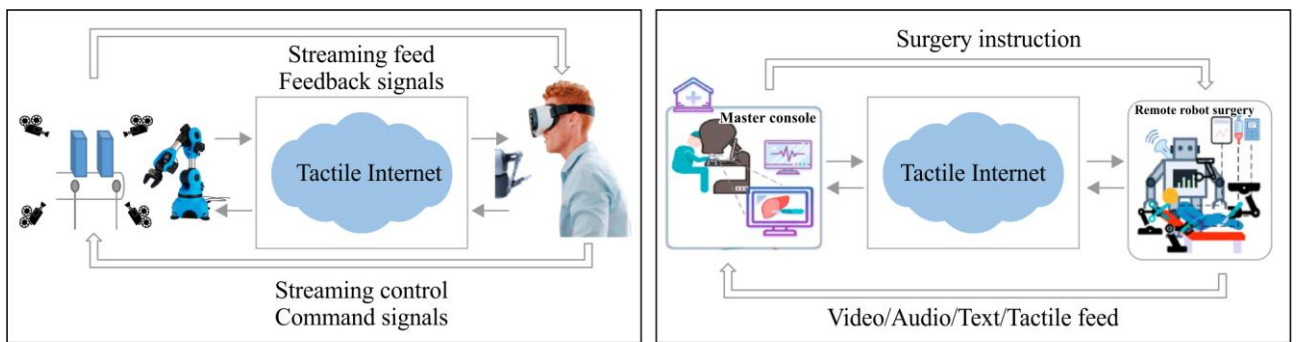

Y Suppl.67(20)\_F03

**Figure 3 – Two typical use cases for tactile Internet**

Two typical use cases for tactile Internet are illustrated in Figure 3. The first use case is remote industrial management that involves real-time monitoring and control of industrial infrastructure operations. Tactile sensors aid a remote human operator to control the machinery by means of kinaesthetic feedback. A crucial component of such an operation between an operator and a machine is the real-time visual monitoring of the remote infrastructure, accompanied by haptic control. This can be provided by immersive audiovisual feeds, such as VR video streaming or other HTC-based streaming methods, together with haptic sensing data synchronization.

The second use case is remote robotic surgery. At the human system interface (HSI), a master console is installed, where the surgeon gets a real-time audiovisual feed of the patient and operating room, as well as feeds from additional data inputs, such as diagnostics and haptic senses. The visual feed is again provided by a HTC-type streaming technology, depending on whether the surgeon is wearing a head-mounted device or interacting with a hologram. The surgeon then operates the haptic devices at the HSI and performs the surgical actions based on the real-time visual feed and the haptic information transmitted to the robot. Haptic feedback from the patient side must also be sent back to the surgeon.

Generally, these two use cases require the network to have very low (near zero) end-to-end network latency for real-time interaction, along with guaranteed high bandwidth to support the visual feed. They also necessitate strict synchronization between the various feeds to allow interactive control.

### **I.2.2 Key network requirements**

- **Bandwidth:** Bandwidth is especially important in the case of remote monitoring as the increase in complexity of the visual feed (from a traditional 2D image, to 360° video, up to holograms) means that the bandwidth requirements grow drastically. For instance, bandwidths up to 5Gbps might be required for VR feeds, increasing up to 1Tbps for large sized holograms.
- **Latency:** Latency is most crucial for high precision applications such as those described in the above use cases (latency is expected to be ultra-low). The maximum delay that goes unnoticed by the human eye is about 5 ms. Moreover, for the operation to be smooth and immersive, the new paradigm even demands end-to-end latency at the sub-ms level for instantaneous haptic feedback in tactile cases [b- Comm Techniques], [b-Tactile Internet].
- **Synchronization:** The human brain has different reaction times to different sensory inputs, for example tactile (1 ms), visual (10 ms) and audio (100 ms) [b-Tactile Internet]. Thus, in tactile cases, the real-time feedback from hybrid sensory inputs, which possibly arise from different locations, must be synchronized strictly. Even in the presence of ultra-low latency, synchronization is important and needs to be significantly shorter than delay. Additionally, reaction time differences may necessitate differentiation, when allocating networking resources. The same application may even involve multiple streams, each with their own delay requirements.
- **Security:** During remote operations, data transmission security should be guaranteed, without being compromised, especially for critical tactile cases associated with human lives and high-value machinery.
- **Reliability:** In such critical applications, loss of information means loss of reliability of the system. Hence, data loss should be as minimal as possible (for example, robust signalling could be enabled for higher reliability). In addition, reliable (re-)transmission schemes should also operate within tolerable delays.
- **Prioritization:** The network should be capable of prioritizing streams based on their immediate relevance and criticality. Since visual feeds involve multiple views and angles for immersive media, the relevance of such different streams should be considered, with those of higher importance to the operator task at hand having a higher priority.

## **I.3 Intelligent operation network (ION)**

### **I.3.1 Use case description**


As networks become increasingly flexible and the complexity of network functions grows, the introduction of intelligent operation capabilities in future networks, in order to provide a variety of intelligent services and applications efficiently can be foreseen to be of great importance.

In the scenario where we are monitoring a network for impairment (or potential impairment) for example, it is common that multiple sensors will be measuring numerous parameters and the key performance indicator is 'network health'. These sensors tend to measure independently of one another and are not always working together in a system-wide manner. Thus, a comprehensive unified, multilevel, and deeply correlated analysis of measurements is needed to accurately pinpoint root causes of alarms and instantly invoke automatic recovery mechanisms.

In this use case, intelligent technologies such as artificial intelligence (AI) will play a key role in feature and pattern recognition [b-Mazin Gilbert]. It is envisaged that such technologies and models would be trained based upon historical data, as well as learning (for example using neural network

techniques) from live network operations and other statistics, to establish a human-brain-like cognition to locate network malfunctions and faults accurately.

A fully automated and intelligent closed-loop control for ION-type applications could be achieved by a framework. As an example, Figure 4 illustrates one such framework with a four-core functional module implementation, including data measurement, data collection, intelligent control centre (i.e., centralized intelligent network-brain), and intelligent intervention capabilities.

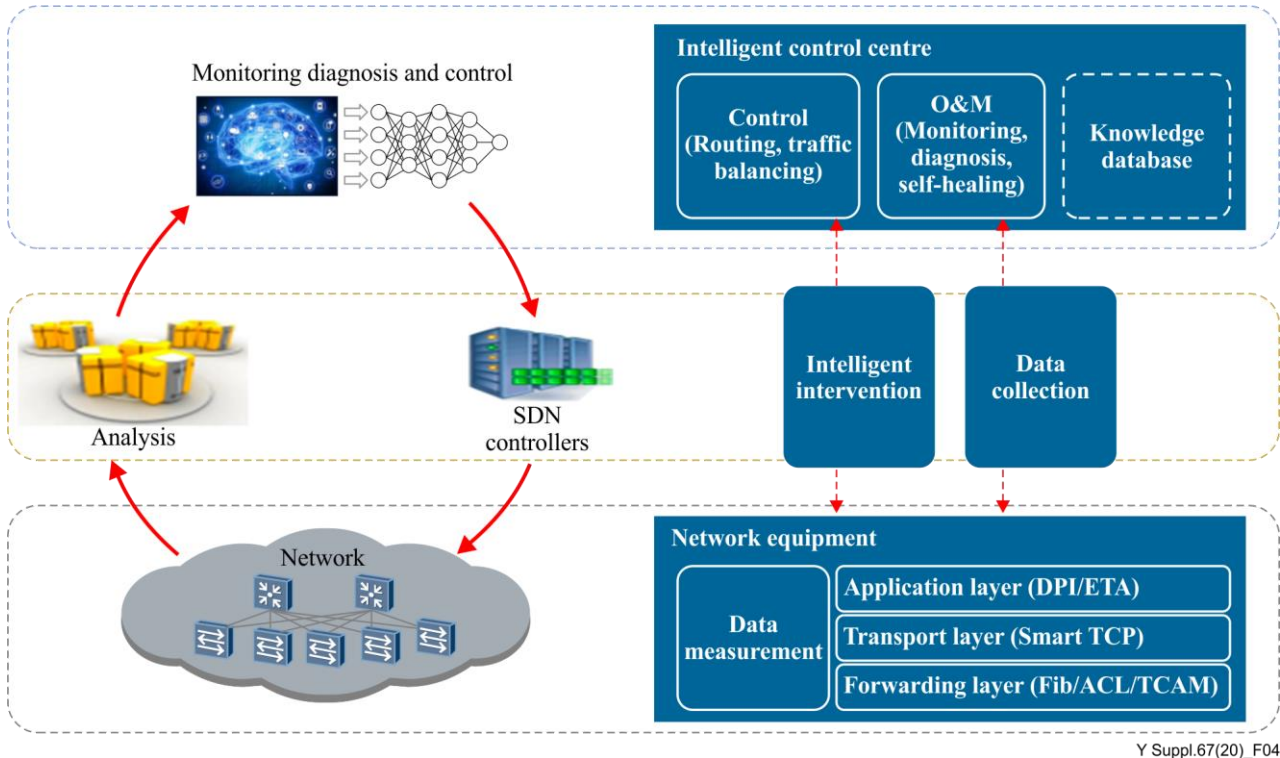

Y Suppl.67(20)\_F04

**Figure 4 – Automated and intelligent closed-loop control**

### I.3.2 Key network requirements

- **Low latency intelligent closed-loop control:** This capability in future networks enables the advanced intelligent operations described previously. The network requires instantaneous collection of network statistics with low latency (in many situations, at the ms or sub-ms level [b-IETF RFC 8678], in order to perform real-time analysis with the assistance of DT-tailored algorithms. If analysis determines that there is a network impairment or an issue with optimization, intelligent management commands are dispatched immediately to enable network recovery or adjustment.
- **Low latency event driven response with data prioritization:** The network will need to report network monitoring information to the intelligent control functionalities from diverse discrete events (e.g., path changes, queue congestion, link breakage, etc.) to implement any intelligent remedial or optimizing actions. Such information should be given a higher priority, as it is expected a need for extremely low latency, at the millisecond level, to support ION applications.
- **High-bandwidth instantaneous data collection for network status:** To truly realise ION-powered networks and the required AI training models will also require intelligent ways to transmit, store and compute the data required by ION-type applications. This implies that we should also consider potential subfunctions related to, for example, network availability, utilization, throughput, congestion states (links, routers/switches), transfer paths for traffic, etc.


- **Programmability and softwarization:** ION requires the network to have capabilities of programmability and softwarization. The network should provide, on demand, programmable and customized data with relevant virtualized functions. Intelligent control functionalities can then (in closed-loop control) react with agility and at pace. In addition, the reported data should be well screened and structured to facilitate analysis by higher layer applications.

## I.4 Network and computing convergence (NCC)

### I.4.1 Use case description

Networking technologies have been developed and deployed over decades to meet the fundamental and ever-increasing requirements of connecting more and more things, people and services. The recent advent of cloud computing and network functions virtualization has resulted in the emergence of network cloudification. Furthermore, with the proliferation of edge computing, computing resources inside a network now extend from a centralized cloud to the network edge, providing almost ubiquitous computing power. However, the computing capability of a single network edge site is normally limited and cannot be flexibly expanded. Therefore, as shown in Figure 5, future networks may require multiple distributed network edge sites to interconnect and collaborate with each other. Orchestration capabilities that are computing aware may need to be supported.

On the other hand, from the perspective of current Internet applications, a serverless oriented micro-service model tends to gradually replace traditional client/server models. Based on new micro-service architectures, together with the availability of ubiquitous computing and storage capabilities throughout the network, individual network edge sites and nodes can become resource providers. As a result, diverse applications can dynamically schedule computing tasks to corresponding computing nodes at different locations according to specific service requirements, real-time network status, and real-time computing resource availability [b-Mobile Edge Computing]. For example, when a client requests low-latency services, the network is enabled to dispatch the request to a nearest light-loaded edge site in order to obtain low-latency responses. If, however, a client requests computation-intensive services, the corresponding tasks may be scheduled to a distant cloud or edge site with high computing power instead.

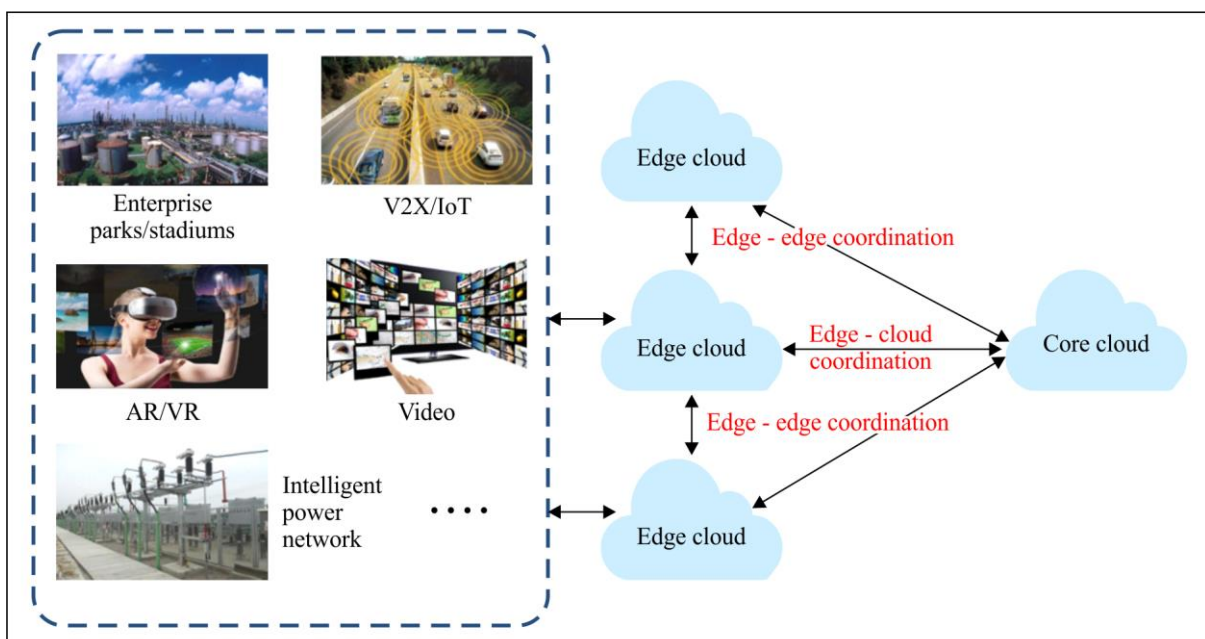

Y Suppl.67(20)\_F05

**Figure 5 – Edge cloud coordination based on network and computing convergence**



Emerging edge applications (for example, AR rendering, autonomous driving and HTC) are characterized by high mobility and other time-varying features. They may require one or more data centres to provide computing resources simultaneously in a coordinated way. In order to support intelligent load-balancing among multiple edge sites, future networks need to support computing-aware network capabilities, with unified management, control and operation in order to guarantee differentiated service experience with much higher granularity than in current networks.

#### **I.4.2 Key network requirements**

- **Computing awareness:** As networks and computing converge, future networks should support controllable in-time computing power allocation, including modelling, measuring, sensing, advertising and operation of computing power, with prescribed time limitations.
- **Joint network and computing resource scheduling:** Future networks should also support joint network and computing resource scheduling. There are two possible ways of performing such scheduling, either in centralized or distributed manners. These two methods can be appropriately utilized to serve as the foundation for agile allocation of computing power based upon diverse services' needs, real-time networking requirements and computing power distribution status.
- **Network protocol programmability:** The resources in future networks should be flexibly configurable, which means that network protocol fields with embedded features be highly programmable, for enhanced realization of NCC applications (e.g., the hybrid coordination of distinct services when there are limited resources). This capability should further satisfy other requirements, such as security, privacy and deterministic delay, while programmability also needs a balanced consideration between protocol overhead and network efficiency. Thus, well-designed mechanisms for network protocol programmability in NCC should be devised.
- **Flexible addressing:** Based on ubiquitous computing resources, every network node can become a resource provider. Flexible addressing capability is thus needed in order to optimally address computing sites, and avoid wasting network resources.
- **Distributed and intelligent network management for verticals:** Taking advantage of ubiquitous computing resources, future networks should support intelligent management capability for every element in the network, enabling autonomic management, self-evolution and self-growth to meet the demand of vertical applications without manual intervention.
- **Multiple access capability:** To cope with the diversity of access modalities from various future computing services, it is expected that future networks support multi-access capability tailored for computing-aware services or (virtual and physical) end points. Such capability should be enabled on a large geographic scale with uniform quality of experience and service.
- **Fast routing and rerouting:** Future networks should support fast routing and rerouting of service traffic flows and computing tasks to the nearest or most available edge site, for real-time processing, under diverse conditions including user mobility, server load variations and other network constraints.

### **I.5 Digital twins (DT)**

#### **I.5.1 Use case description**

A digital twin (DT) is usually defined as a real-time representation of a physical entity in the digital world. Digital twins (DTs) will add value on top of traditional analytical approaches by improving situational awareness, and further enable better responses for physical asset optimization and predictive maintenance. Facilitated by vastly deployed DTs, the digital world and the physical world will also have the potential to be fully intertwined, contributing to formulate a new norm of DT-enabled cyber-physical world in the near future.

Digital twins can be applied to numerous scenarios with physical objects, including cars, buildings, factories, cities, environment, as well as processes and people. Among these scenarios, a digital twin city (DTC) is a case that exhibits typical features of the use of DTs [b-DT Technologies]. To be more specific, a city is a complex system, composed of people, things, processes and lots of events: through the adoption of DT relevant technologies, all the city facilities can be mapped to their DT counterparts, such as streets, communities, schools, hospitals, water supply systems, power systems and even crowd activities and events. This allows city operators to model guideline strategies with potential tactics to deal with issues in the city before they occur. Figure 6 shows an example smart city system reference framework based on the DT paradigm, which interconnects the physical city with the virtualized city in the cyber world.

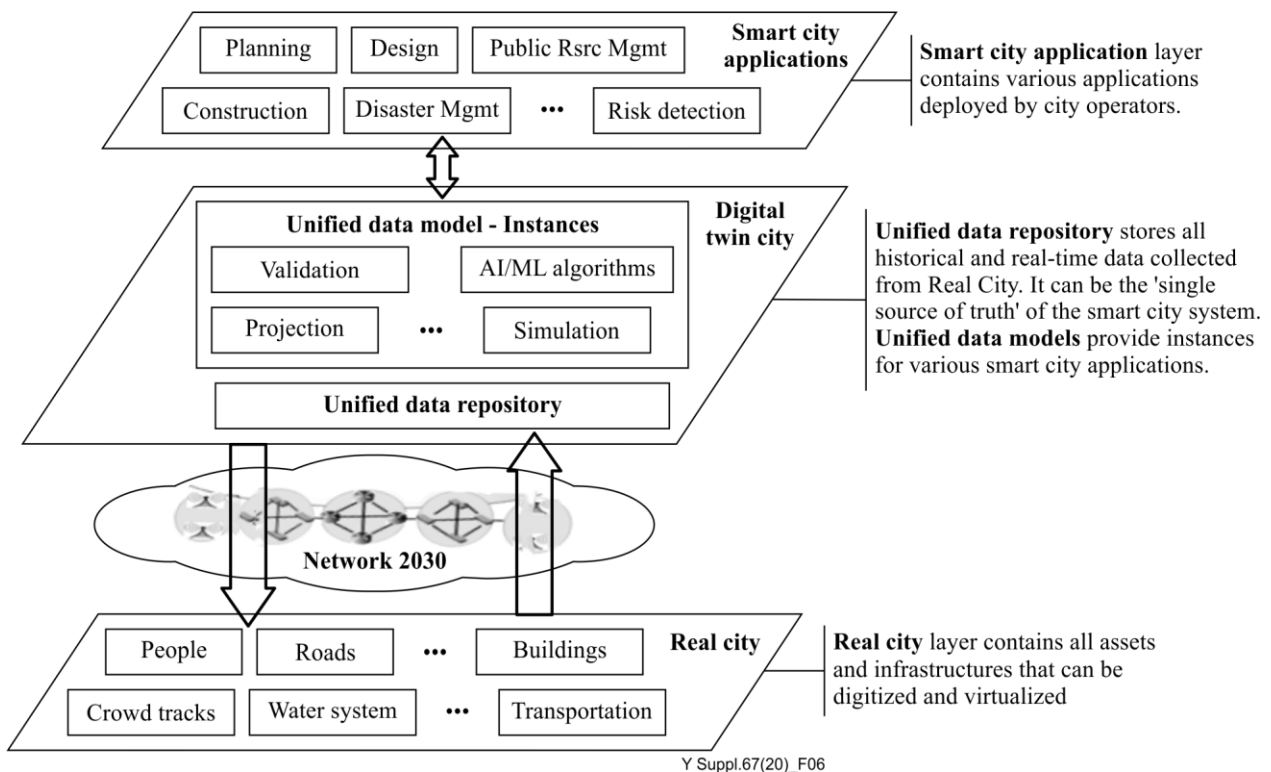


Figure 6 – Example reference framework of a digital twin city (DTC)

### I.5.2 Key network requirements

- **Bandwidth:** Virtualized objects in a DTC may generate extremely large amounts of data (it should be noted that, once the virtual model is mapped, subsequent changes may imply reduced amounts of data). In some cases, the sensory data exchanged between digitized objects or between physical and virtual objects, is quite small; however, in other cases, such as when AR/VR is used to visualize a large-size digital twin entity (e.g., buildings, factories, etc.) for data exchange, a high bandwidth is required, similar to HTC. Furthermore, in the case of applying sensory entities for alarming, it demands a guaranteed bandwidth for instant low-volume data transmission with relatively high priority. Therefore, a highly diversified bandwidth on-demand is a key network requirement for DTC.
- **Latency:** Empowered by DT technologies, city operators need to have timely responses for regular resource management, as well as mission critical applications such as emergency management. Data exchange between a DTC and a real city, needs to be as fast as possible, down to the ms level in the case of critical services, hence requiring extremely low-latency data transmission [b-DT Technologies].

- **Mobility:** In a DTC, some entities (e.g., buildings, water system) never move, whilst others (e.g., citizens, cars, subways) have high mobility or group mobility. Thus, the network needs to flexibly support mobility on-demand and virtualized entity transition in the DT world.
- **Elasticity:** In a DTC, different DTs may request different network resources to meet the requirements from different city applications. Moreover, some digital objects may request network resources only for temporary tasks. Thus, the network should be highly elastic to enable flexible resource scheduling.
- **Security and privacy:** Since most of the data in a DTC will be associated with citizens or public facilities in the real world, the information exchanges in the digital world must be secure enough to avoid attacks and must be well protected to maintain privacy of data. Thus, new security frameworks (i.e., intrinsic security, binding with digital objects) and novel privacy protection mechanisms should emerge in order to achieve end-to-end security and privacy in an integrated cyber-physical world. Note that, a network serving a DTC could be a private network, logically or physically separated from the public network, for example in a factory of the future.
- **Artificial intelligence (AI) for DTC operations:** AI will play an increasingly important role in DTCs, as adoption of AI technologies to efficiently process large-scale heterogeneous data in emerging DT platforms grows. As examples, AI can be deployed to easily detect network attacks and quickly apply recovery strategies, as well as for achieving increased reliability through intelligent operations with full network automation in the DTC.


## **I.6 Space-terrestrial integrated network (STIN)**

### **I.6.1 Use case description**

This use case outlines one scenario of a future seamlessly integrated space and terrestrial Internet framework. In this example, the aim is to leverage interconnected low earth orbit (LEO) satellites and other non-terrestrial networking nodes and platforms to build a parallel Internet network that can peer with its terrestrial counterpart. With such an integrated framework envisaged key benefits include: (i) ubiquitous Internet access at a global scale, including rural areas like oceans, deserts, as well as moving platforms such as ships and planes; (ii) enriched Internet paths that could lead to better data delivery performance compared to those over the terrestrial Internet determined by BGP configurations across domains; (iii) ubiquitous edge caching and computing services provided by lightweight, on-board computing and storage resources on LEO satellites.

Compared to today's satellite network infrastructures, one essential aspect is that future mobile devices (e.g., smart phones, tablets etc.) are able to directly communicate with the locally accessible LEO satellite over the head, but without necessarily relying on traditional ground station infrastructures that are constrained by geographical distributions. Figure 7 below provides a high-level illustration of the use case for a space-terrestrial integrated network (STIN) [b-STIN].



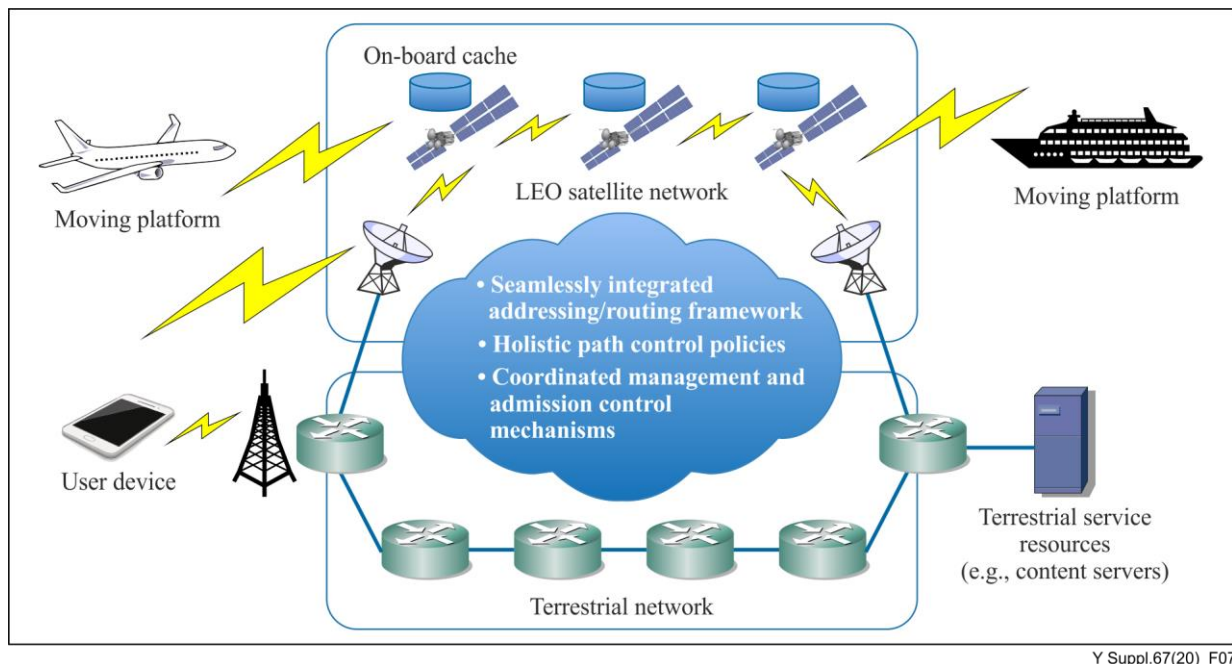

**Figure 7 – Example of LEO satellites and terrestrial Internet integration**

### I.6.2 Key network requirements


- **Flexible addressing and routing:** Today's allocation of IP prefixes is typically done through major regional Internet registries (RIRs) according to specific geographical locations. Consider the IP addressing issue on potentially thousands of LEO satellites with their constellations, the interoperations with the terrestrial Internet infrastructure will incur new challenges, as the IP addresses in the space will dynamically interconnect to different domains (autonomous systems) on the ground with different IP prefixes. The new feature of allowing mobile devices to directly connect to local satellites also requires a cost-efficient addressing scheme for the mobile devices to communicate with local satellites without necessary address translation operations. The IP addressing strategy will also have direct implication to the routing mechanism both within the LEO satellite network and across the network boundaries between it and the terrestrial network infrastructure. The mobility characteristic of LEO satellite network is that the movement of the satellites are dynamic but predictable. The vast majority of network links connecting them are statically configured, while a small number of links can be established and torn down on the fly when two satellites on different orbits meet/depart from each other. Thus, an integrated routing mechanism is highly demanded, with the consideration of unique features in STIN.
- **Bandwidth capacity at the satellite side:** Compared to the high-capacity fibre optical links that constitute the traditional Internet infrastructure backbone as well as cutting edge access networks, the links connecting LEO satellites in the space and the terrestrial Internet infrastructure may become a significant bottleneck in terms of bandwidth capacity. In this scenario, the requirement is to increase the capacity in space, including peering links between satellites and also between satellites and ground stations or user devices in order to match terrestrial capacity for future STIN-based applications.
- **Admission control by satellites:** In contrast to the traditional scenario where ground stations can be responsible for admission control on the traffic intended to be delivered through the space Internet, allowing mobile devices to directly access satellite networks will need to lift the admission control function to individual satellites which will directly interface these mobile devices. In this challenge, it is essential for each satellite (as the access point) to have necessary knowledge about the traffic load in the space network in order to make admission control decisions.

- **Edge computing and storage:** The realisation of edge computing and storage capabilities will incur challenges, in particular the hardware requirements, on the LEO satellite side. For instance, the complexity of data/content processing at each satellite will be constrained by the power or battery capabilities. Lightweight edge computing tasks are still possible, which can be enabled under such constraints. Edge content caching is another application scenario that can be supported by the LEO satellite network for improving user experience, thanks to reduced content access latency from the local cache in space. Similar to the edge computing scenario, content caching will be constrained by the data storage capacity that can be carried by each satellite [b-STIN].

## I.7 Industrial IoT (IIoT) with cloudification

### I.7.1 Use case description

Industrial networks enabled by the Internet of things (IIoT) are fundamentally different from information technology (IT) networks in terms of performance and reliability requirements. They go beyond connecting back offices to factory floors, moving towards integration from the device level all the way through to enterprise business systems, resulting in the automatic operation and control of industrial processes without significant human intervention. These networks therefore need to deliver superior performance and mandate a real-time, secure and reliable factory-wide connectivity, as well as inter-factory connectivity at a large scale in the future.

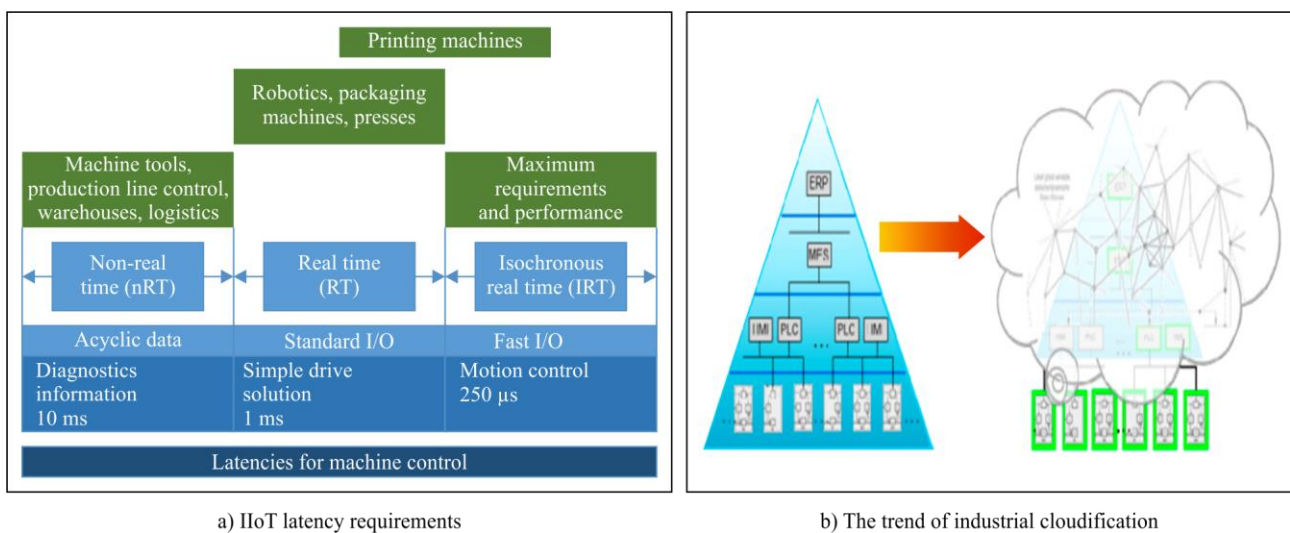

**Figure 8 – Requirements of IIoT with cloudification**

Factory automation and machine control applications typically demand low end-to-end latency ranging (from sub-ms to 10 ms), and small jitter (at 1µs level), to meet the critical closed loop control requirements, as shown in Figure 8. On top of that, many machine control applications are multi-axis applications requiring time synchronization to manage the complex position relationships between axes. Moreover, in some observed instances, a service availability of 99.999999% is demanded by some industrial networks [b-IIoT], [b-5G for IIoT], as any break or suspension in the production line may lead to million-dollar losses. For similar reasons, the security requirements of such systems are also extremely important.

At the same time, as part of the fourth industrial revolution, or Industry 4.0, operational technologies (OTs) and information technology (IT) are converging. Control functions traditionally carried out by customized hardware platforms, such as programmable logic controllers (PLCs), have been slowly virtualized and moved onto the edge or into the cloud in order to reduce the CAPEX and OPEX of the system, and to provide increased system flexibility and capability to handle and analyse 'big data'.

This industrial cloudification places even higher requirements on underlying networks, as the same latency, jitter, security and reliability requirements need to be implemented at larger scales.

### I.7.2 Key network requirements

- **Latency:** IIoT systems contain many control subsystems that run at cycle times ranging from sub-ms to 10 ms [b-IIoT], [b-5G for IIoT]. In such systems, end-to-end control requires in-time signalling delay at the same cycle time level, without malfunctions. These low latency requirements of IIoT applications are increasingly not only relevant to internal system communications, but also becoming essential for the interconnection of remote systems.
- **Synchronization:** It is a fundamental requirement for multiple-axis applications to have time synchronization in order to permit cooperation between various devices, sometimes remotely.
- **Small and bounded jitter:** In order to recover the clock signal and reach precise time synchronization, the machine control, especially the motion control subsystem, requires very small jitter at sub-microsecond level, and such small jitter is expected to have bounded limits under some critical situations.
- **Security and reliability:** IIoT systems demand high reliability and high security to avoid any potential risk of interrupting production. Specifically, the service availability requirement typically ranges from 99.9999% to 99.999999% for IIoT applications [b-5G for IIoT].
- **Large-scale deterministic networking capability:** Due to upcoming wide deployment of industrial cloudification, the aforementioned network requirements should be supported by large-scale deterministic networks in the near future.

## Part II: Use case requirement scoring and analysis


### II.1 Graphic representations of the network requirements

The seven representative use cases described in this supplement have been further evaluated according to five abstract network requirement dimensions, widely discussed in [b-FG 2030 activities], namely: **Bandwidth**, **Time**, **Security**, **Artificial Intelligence (AI)** and **ManyNets**. The relative scores for these five dimensions, ranging from 1 to 10, are shown in figures 9 and 10 using two different graphic representations. (Note that all the scores are given according to the relative importance of a specific network requirement: 1 to 3 are for relatively LOW requirement; 4 to 6 are for MEDIUM requirement; 7 to 9 are for relatively HIGH requirement; and 10 means EXTREMELY demanding requirement.)

The five dimensions identified in this supplement have been abstracted from more than twenty relevant network requirements considered within Subgroup 1 of FG NET-2030, as shown in the table below.

**Table 1 – Abstract dimensions with relevant network requirements**


Abstracted dimensions	Relevant network requirements
Bandwidth	Bandwidth; capacity; QoE; QoS; flexibility; and adaptable transport
Time	Latency; synchronisation; jitter; accuracy; scheduling; coordination; and geolocation accuracy
Security	Security; privacy; reliability; trustworthiness; resilience; traceability; and lawful intercept
AI	Data computation; storage; modelling; collection and analytics; autonomy; and programmability
ManyNets	Addressing; mobility; network interface; and heterogeneous network convergence

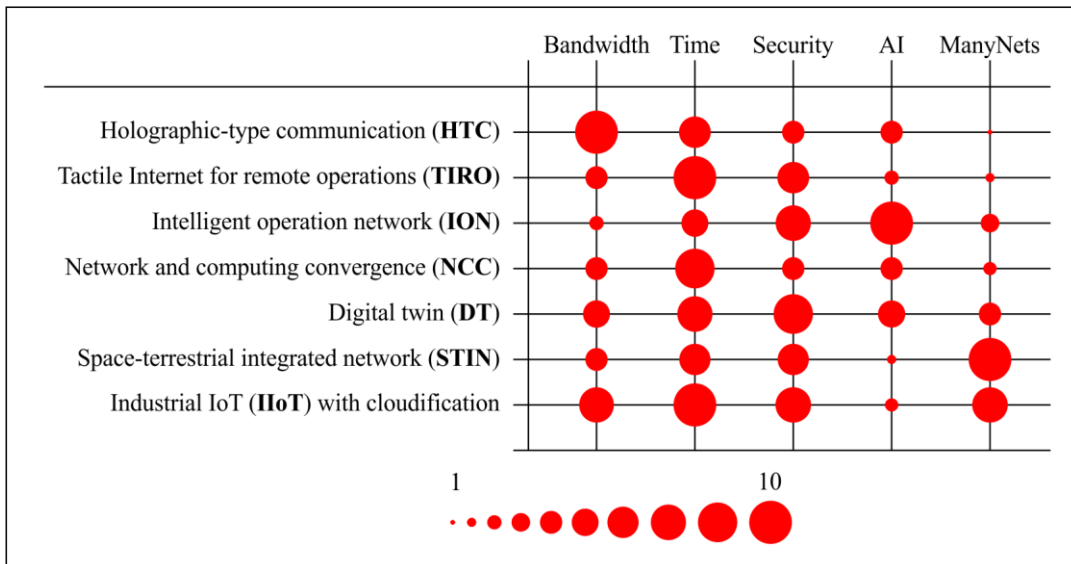

Y Suppl.67(20)\_F09

**Figure 9 – Relative network requirement scores for the 7 representative use cases – ball diameter graph representation**

Reverse spider graph: Use cases with relative requirement scores

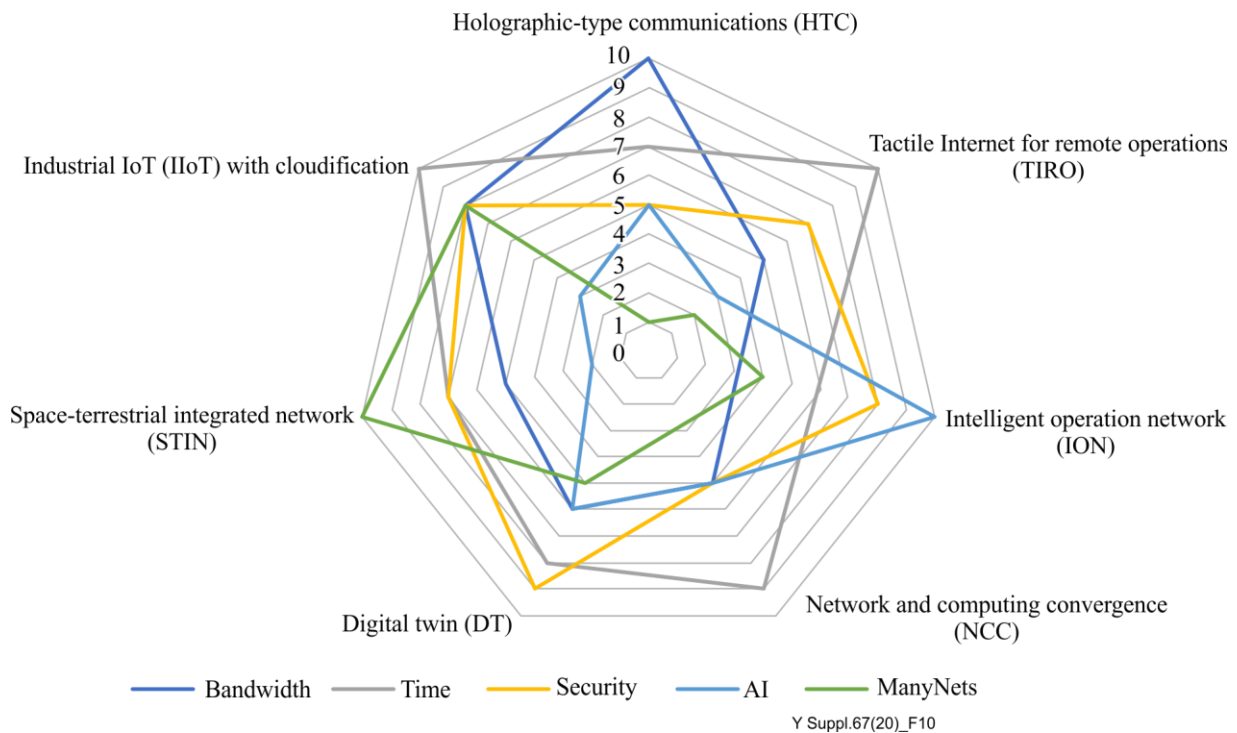


Y Suppl.67(20)\_F10

**Figure 10 – Relative network requirement scores for the 7 representative use cases – reverse spider graph representation**

Both Figure 9 and Figure 10 show the relative significance of each network requirement dimension for a given use case. In Figure 9, the relative importance of network requirements can be easily compared, horizontally for different dimensions of one particular case, or vertically for a specific dimension across multiple use cases. On the other hand, Figure 10 shows the most prominent dimensions for all use cases. The rationale behind the five abstract requirement dimensions and a detailed analysis of the individual use cases are elaborated in subsections II.2 and II.3 respectively.

Additionally, Figure 11 collectively presents the relative importance of each of the five network requirement dimensions by presenting the accumulated scores of each dimension across use cases. From this, the following observations can be derived:

- The **Time** dimension is of the highest importance across all use cases. This pinpoints that deterministic timing, bounded jittering, time-sensitive synchronization should be a primary consideration in future network protocols and architecture designs for Network 2030.
- The **Security** dimension is the second-most prominent one, highlighting that new applications and services will trigger new security requirements, and that, generally, security and privacy issues are always of high priority and even more in future networks which will be highly softwarized
- The **Bandwidth** dimension is highly customized for specific vertical applications; the demand can be extremely high for AR/VR/HTC-style applications, or just of medium level for large-scale monitoring services via IoT sensors.
- The **Artificial Intelligence (AI)** dimension is becoming more and more important; AI is not only applicable to improve networking operations through network status analysis, but also can be widely deployed to enable future intelligent applications and services.
- Lastly, the **ManyNets** dimension targets the seamless coexistence of heterogeneous networks, and is essentially motivated by the integration of terrestrial networks with spatial and marine networks for fully global connectivity coverage. Furthermore, it can also address the integration of vertical industries with the telecommunication networks, as well as more novel network paradigms that will emerge due to the era of network convergence.

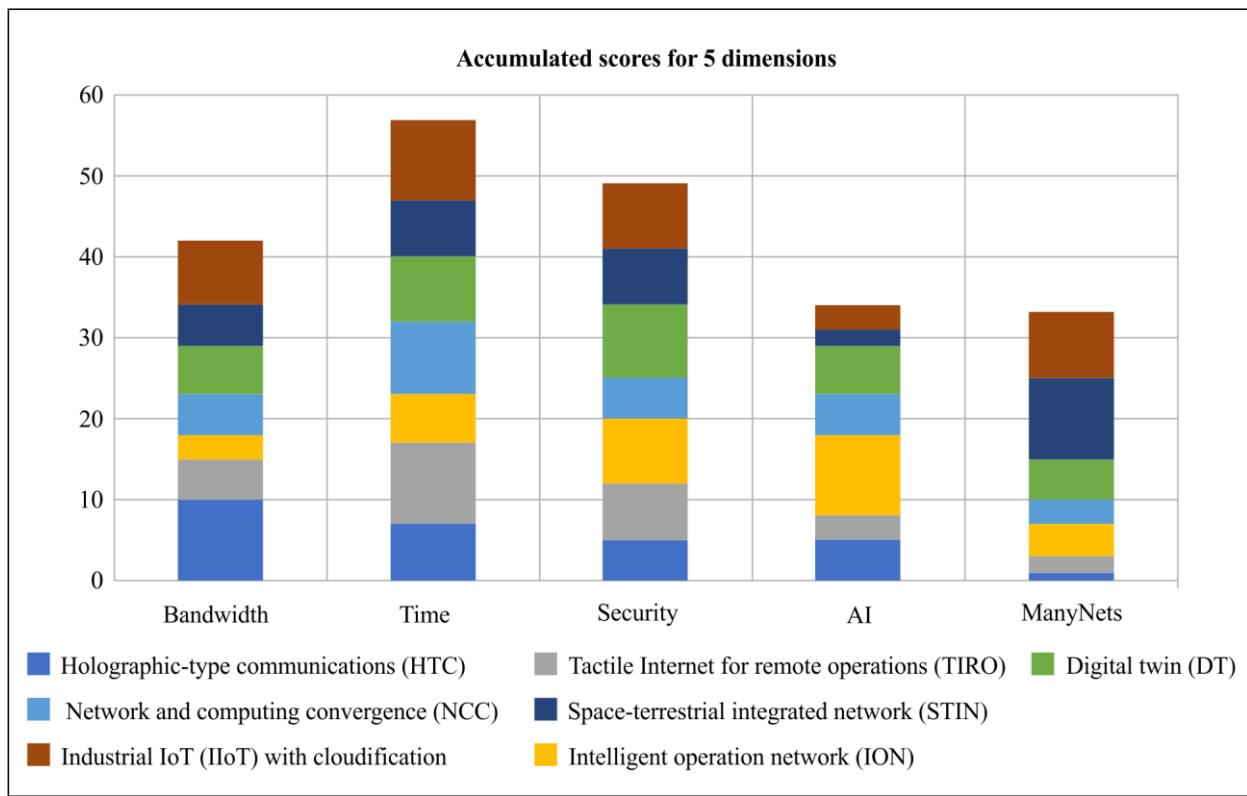

Y Suppl.67(20)\_F11

**Figure 11 – Accumulated dimensional scores for the seven representative use cases**

## II.2 Rationale for consideration of the five abstract requirement dimensions

The representative use cases identified for Network 2030 each have their own requirements in terms of specific network capabilities. In order to plan the deployment of a specific service it is important to understand its requirements at a high level as well as its impact upon the different dimensions. In

simple terms, the views of all stakeholders, from network operators all the way through to end users, have to be considered; for example, bandwidth might be key to an end user's application flow, but an operator will be considering aggregated bandwidth and requirements of applications simultaneously using the network for multiple purposes.

In this context, each dimension adopted in Figure 10 and Figure 11 has been abstracted after considering and consolidating different (but related) factors, as explained below through examples:

- The **Bandwidth** dimension uses higher scores of the 1-10 range to show high bandwidth requirements. The score is obviously very high for 3D multimedia related applications such as HTC. However, in some cases, it should be also considered that flexible 'bandwidth on demand' type of situations may arise, such as in the ION use case. In addition, Industry 4.0 relevant operations (IIoT use case) may require asymmetric flows of high bandwidth in one direction (upstream to controller) and low bandwidth in the other direction (e.g., downstream command to robots).
- The **Time** dimension expresses the notion of latency tolerance, based upon a lower tolerance receiving a higher score. The time dimension may refer to data transmission latency, sensitivity to jitter and timing accuracy, or even synchronized arrival intervals. Since mobility is a requirement of most of these use cases, finding the accuracy of geolocation in real-time may also be partially regarded as a characteristic factor of the time dimension.
- The **Security** dimension encompasses integrity, privacy protection, trustworthiness, resilience, lawful interception and traceability, with a high score indicating stringent requirements. The interpretation of this dimension includes consideration of the requirements and priorities of all stakeholders. The default score for security has been assumed to be relatively high (i.e., 5 or above in our scoring system) as all identified use cases need a secure end-to-end communication infrastructure. Furthermore, crossing regulatory boundaries or working with multi-domain networks may be required; a high score for security in these use case scenarios means that interconnectivity between different networks preserves user's identity and data integrity.
- The **Artificial Intelligence (AI)** dimension increases in relevance and practical impact upon applications almost on a daily basis. Across the use cases identified, the primary consideration is the application of AI and ML techniques that can be implemented in networks, for purposes such as network optimisation, predictive analytics, improved capacity and congestion planning, traffic pattern prediction, anomaly detection dynamic resource allocation, resilience enhancement, and so forth. It is believed that AI will play an important role in future networks, and high scores are used to indicate high importance.
- The **ManyNets** dimension represents the heterogeneity score of the networks, so that network capabilities are normalized. A particular user should be offered the same network capabilities and receive the same network experience through any type and number of networks it attaches to or transits through. A low score suggests that quite homogeneous networks predominate in the use case, like closed factory sites, local-scale IP-based delivery, whereas a high score implies relevant usage of public networks in combination with quite heterogeneous access or transit network technologies.

### II.3 Detailed analysis of the individual use cases

The scores for each use case have been based upon agreed estimates and the relative importance of each dimension in a use case has been benchmarked against the other use cases. For example, in the security dimension, a score of five has been chosen to denote standard security requirements. Where either reduced or above normal levels of security are deemed important or critical, when compared to the other use cases, the score has been adjusted accordingly with qualitative best guess scores applied, after group consent.



In each use case, the most demanding, single flow application, has been the driving consideration when comparing the relevance of each dimension. So, in the HTC use case, it is envisaged that these applications require much higher bandwidth than the baseline bandwidth requirement for other use cases, and with the potential for bandwidth requirements to be extremely large when true hologram-based digital teleportation is fulfilled, the score of this dimension is high.

- **Holographic type communications (HTC)**

The key network requirement for HTC is bandwidth. A single HTC flow is expected to consume from hundreds of megabytes to multi-gigabytes of bandwidth, or even higher for full size, true holograms. Thus, a small number of such live sessions will have big impact on an operator's overall network capacity. In addition, time is also of relatively high importance for this use case, although not as much as in other cases such as IIoT. It is expected that AI or ML algorithms for image sampling or recognition will play a role in managing the bandwidth demands of the future (for example, through the enhancement of the current media formats). Security, as in all other use cases, needs careful consideration. The security requirements may vary slightly depending upon the specific application. The ManyNets dimension is not critical to HTC.

- **Tactile Internet for remote operations (TIRO)**

The TIRO use case addresses applications which are first and foremost reliant and sensitive to the time dimension, and therefore, a corresponding extreme score has been assigned. The average score in bandwidth is on the other hand expected, as requirements will depend upon specific applications and the required degree of sensing and feedback in each communication. Almost all industrial verticals benefit from the feedback of remote operations or from remote entities, hence network operators may wish to plan for a high number of active tactile flows. An average score in security is expected, this score being high for critical tactile applications associated with human lives and high-value machinery. Both ManyNets and AI dimensions are not critical to TIRO-style applications.

- **Intelligent operation network (ION)**

Networks are expected to become more autonomous, self-healing, self-managing and self-configuring, and therefore relying heavily on AI enabled operations. Although ION may require a large amount of real-time telemetry data (which is generally in the control plane), it is by no means comparable to HTC's high volume data; thus, this use case carries a lower bandwidth score, and relatively equivalent score for time. The security of such networks is shown to be of a high importance (and therefore a high score is prescribed) at the infrastructure level. An operator may need to manage heterogeneous network domains for new service capabilities, therefore a reasonable dependency on ManyNets is anticipated.

- **Network and computing convergence (NCC)**

The most prominent feature of the NCC use case is the ability to promptly schedule network resources (networking capability and computing power), whenever demanded in the network; this implies a high score for the time dimension. From the perspective of network operations, the NCC use case is expected to have fair requirements in terms of bandwidth, security and AI. The ManyNets requirement focuses on connecting a variety of networks that may merely adopt NCC-compliant mechanisms, hence its score is relatively low.

- **Digital twins (DT)**

DTs are digital replicas of physical objects, and the core technology for automatic cyber-physical integration. DTs and relevant network enablers are heading towards a variety of applications, which are reflected by above average scores of bandwidth and time dimensions. Securing DT-based operations and identity, assuring trustworthiness and that the data in transit is not compromised, are of utmost importance since DT-based applications and tools

will be a key technology for critical infrastructure. Considering that application level intelligence needs to be distinguished from network level intelligence (as the AI capabilities that will support DT operations are not network related), a medium score for AI is associated with this use case. Fair requirements are also expected in terms of ManyNets.

- **Space-terrestrial integrated network (STIN)**

The particular value that STIN provides is to enable low latency applications and provide connectivity to underserved geographical areas. Satellite networks may be placed as access, edge or backhaul networks in ManyNets, therefore, opening several new opportunities for network infrastructure design. The time and security dimensions are rated high, while average bandwidth capabilities are required and AI is expected to play only a marginal role in service specific path selection, planning or recomputation.

- **Industrial IoT (IIoT) with cloudification**

IIoT is at the heart of Industry 4.0. The types of device involved range from cameras to tiny sensors. Some IIoT devices will beam large amounts of multimedia data, while a large set of sensors will cover all aspects of a factory floor. Recently, the core parts of a PLC tend to be fully cloudified facilitating the application of IIoT at large scales. Basically, other than AI's limited usage (a low score is attributed due to the separation of application level intelligence from the network), the IIoT use case has pervasive high demands across all other requirement dimensions.

## **Conclusion**

Part I of this supplement describes seven representative use cases for Network 2030 with their potential key network requirements, and part II summarizes these network requirements with their relative importance according to five abstract dimensions. The relative scores were also evaluated for each use case, and illustrated in a graphic manner.

Collectively, and within the limits of this restricted exercise, it is believed that these representative use cases may provide a potential vision of new applications and services in the era of Network 2030.



## Bibliography

- [b-3D Holographic] 3D Holographic Display and Its Data Transmission Requirement (2011)  
<<https://ieeexplore.ieee.org/abstract/document/6122872>>
- [b-5G for IIoT] Private 5G Mobile Networks for Industrial IoT (2019)  
<<https://www.qualcomm.com/media/documents/files/private-5g-networks-for-industrial-iiot.pdf>>
- [b-Comm Techniques] Ultrareliable and Low-Latency Communication Techniques for Tactile Internet Services (2019 )  
<<https://arxiv.org/pdf/1907.04474.pdf>>
- [b-DT Technologies] Digital Twin Technologies and Smart Cities (2020)  
<<https://link.springer.com/content/pdf/10.1007/978-3-030-18732-3.pdf>>
- [b-FG 2030 activities] FG Network 2030 Sub-Group 1's interim activities:  
<<https://extranet.itu.int/sites/itu-t/focusgroups/net-2030/SitePages/Sub-Group%201.aspx>>
- [b-HaptoClone] HaptoClone  
<<http://www.hapis.k.u-tokyo.ac.jp/?portfolio=haptoclone&lang=en>>
- [b-Holographic image] Holographic image transmission using blue LED visible light communications (2016)
- [b-Holoportation] Holoportation, Microsoft Research  
<<https://www.microsoft.com/en-us/research/project/holoportation-3>>
- [b-IETF RFC 8678] IETF RFC 8678 (2019), Deterministic Networking Use Cases,  
<<https://tools.ietf.org/html/rfc8578>>
- [b-IIoT] Industrial Networking Enabling IIoT Communication (2018)  
<[https://www.iiconsortium.org/pdf/Industrial\\_Networking\\_Enabling\\_IIoT\\_Communication\\_2018\\_08\\_29.pdf](https://www.iiconsortium.org/pdf/Industrial_Networking_Enabling_IIoT_Communication_2018_08_29.pdf)>
- [b-Mazin Gilbert] Mazin Gilbert (2018), *Artificial Intelligence for Autonomous Networks*, CRC Press.
- [b-Mobile Edge Computing] China Mobile Edge Computing Technical White Paper (2019)  
<<http://cmri.chinamobile.com/wp-content/uploads/2019/02/China-Mobile-Edge-Computing-Technical-White-Paper.pdf>>
- [b-Network 2030] Network 2030: Market Drivers and Prospects (2018), Richard Li, FG NET-2030 Chairman, 1st Network 2030 Plenary Meeting in New York, Oct. <<https://www.itu.int/en/ITU-T/Workshops-and-Seminars/201810/Pages/Programme.aspx>>
- [b-STIN] Haipeng Yao, Luyao Wang, Xiaodong Wang, Zhou Lu, and Yunjie Liu (2018), *The Space-Terrestrial Integrated Network (STIN): An Overview*, IEEE Communications Magazine.
- [b-Survey] A Survey on Holography (2017)
- [b-Tactile Internet] ITU (2014), *The Tactile Internet ITU-T Technology Watch Report August*. <[https://www.itu.int/dms\\_pub/itu-t/opb/gen/T-GEN-TWATCH-2014-1-PDF-E.pdf](https://www.itu.int/dms_pub/itu-t/opb/gen/T-GEN-TWATCH-2014-1-PDF-E.pdf)>
- [b-Teleoperation] Mahya Shahbazi, Seyed Farokh Atashzar, Rajni V. Patel (2018), *A Systematic Review of Multilateral Teleoperation Systems*, IEEE Transactions on Haptics, May.
- [b-Truly Immersive HTC] IEEE (2020), *Toward Truly Immersive Holographic-Type Communication: Challenges and Solutions*, IEEE Communications Magazine, Jan.  
<<http://drrajivdesaimd.com/2017/09/17/hologram>>  
<[http://www.apsipa.org/proceedings\\_2016/HTML/paper2016/234.pdf](http://www.apsipa.org/proceedings_2016/HTML/paper2016/234.pdf)>





## SERIES OF ITU-T RECOMMENDATIONS

Series A	Organization of the work of ITU-T
Series D	Tariff and accounting principles and international telecommunication/ICT economic and policy issues
Series E	Overall network operation, telephone service, service operation and human factors
Series F	Non-telephone telecommunication services
Series G	Transmission systems and media, digital systems and networks
Series H	Audiovisual and multimedia systems
Series I	Integrated services digital network
Series J	Cable networks and transmission of television, sound programme and other multimedia signals
Series K	Protection against interference
Series L	Environment and ICTs, climate change, e-waste, energy efficiency; construction, installation and protection of cables and other elements of outside plant
Series M	Telecommunication management, including TMN and network maintenance
Series N	Maintenance: international sound programme and television transmission circuits
Series O	Specifications of measuring equipment
Series P	Telephone transmission quality, telephone installations, local line networks
Series Q	Switching and signalling, and associated measurements and tests
Series R	Telegraph transmission
Series S	Telegraph services terminal equipment
Series T	Terminals for telematic services
Series U	Telegraph switching
Series V	Data communication over the telephone network
Series X	Data networks, open system communications and security
<b>Series Y</b>	<b>Global information infrastructure, Internet protocol aspects, next-generation networks, Internet of Things and smart cities</b>
Series Z	Languages and general software aspects for telecommunication systems