

## **Presentation Outline**


## What is NGN and how it applies in Mobile Networks?


- > Mobile Networks Architectures
- > Why NGN?




All rights reserved © 2005, Alcatel



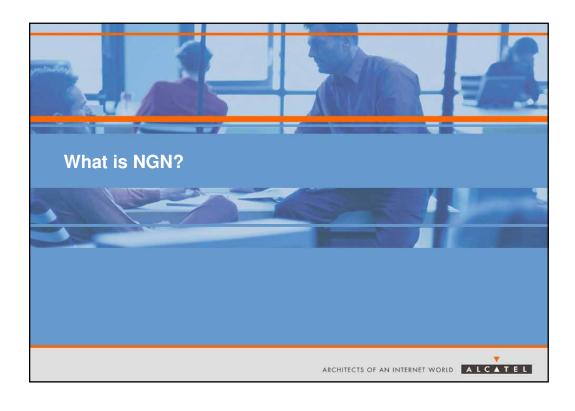


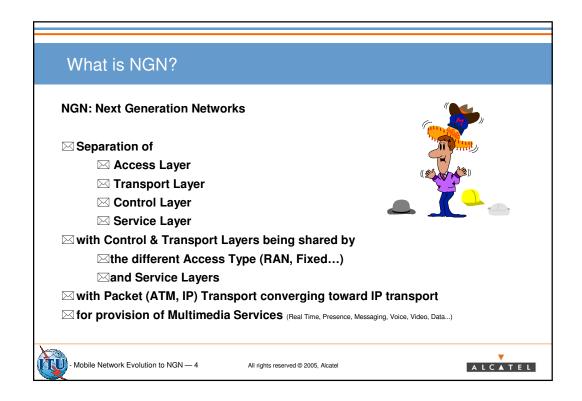


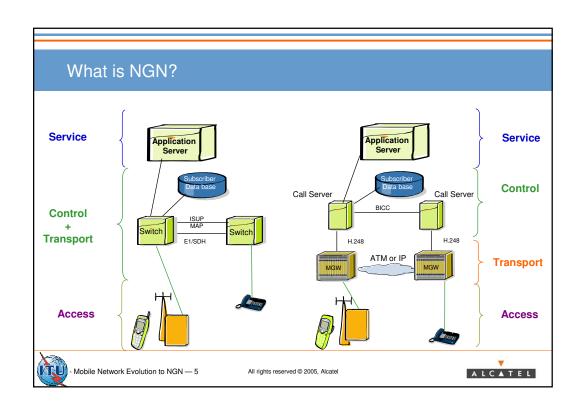






## How NGN Applies in Mobile Networks? ⊠ UMTS R99: □ Largely derived from GSM □ Last non-NGN Release ☑ Features content functionally frozen 12/2000 Still Change Requests ⊠UMTS R4: **⋈** NGN in Cs Domain with Separation of Control and User layers ☑ Introduction of ATM and IP transport instead of TDM ⊠ Standard completed in March 2001 **⊠UMTS R5:** $\bowtie$ NGN for IMS ☑ Introduction of MM Call Server with SIP Call Control Protocol Standard Content frozen in June 2003 Mobile Network Evolution to NGN — 7 All rights reserved © 2005, Alcatel ALCATEL

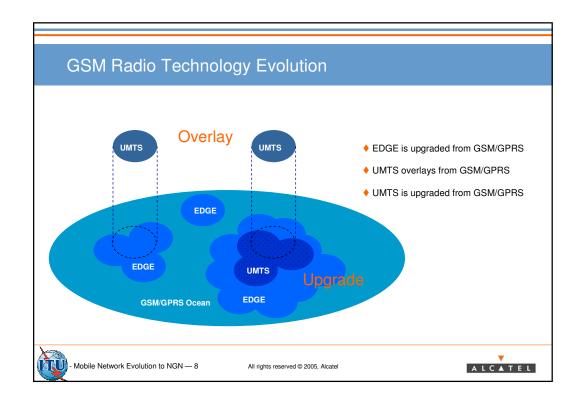


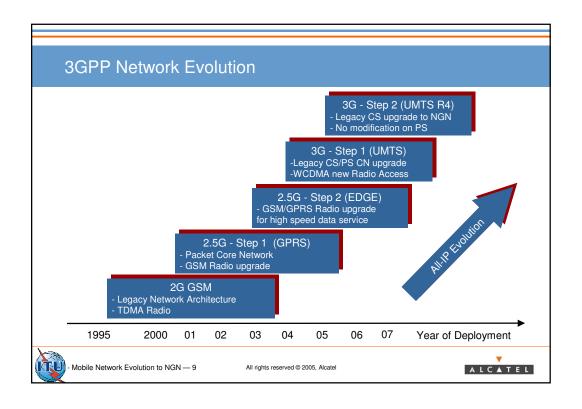


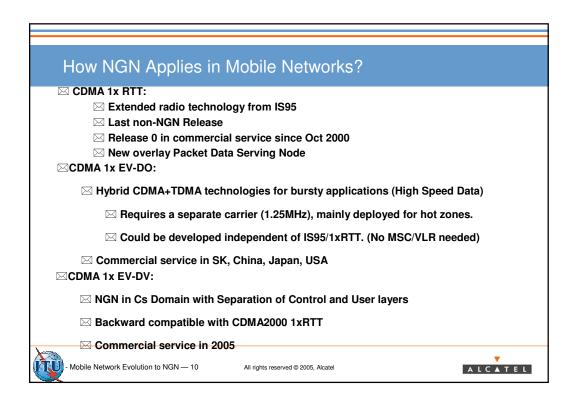


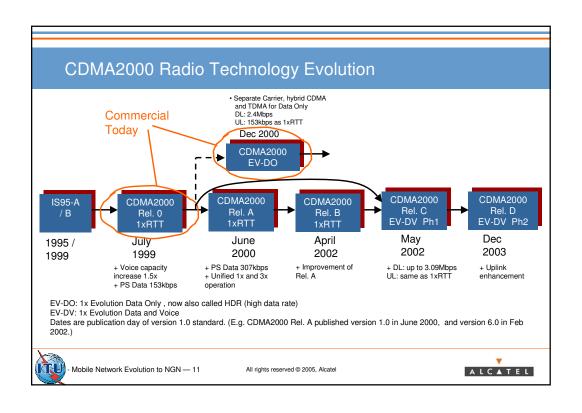


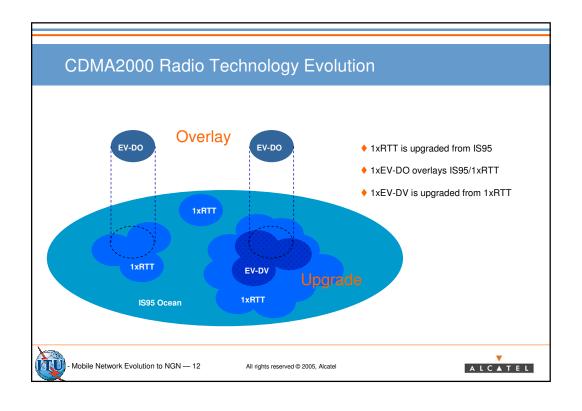


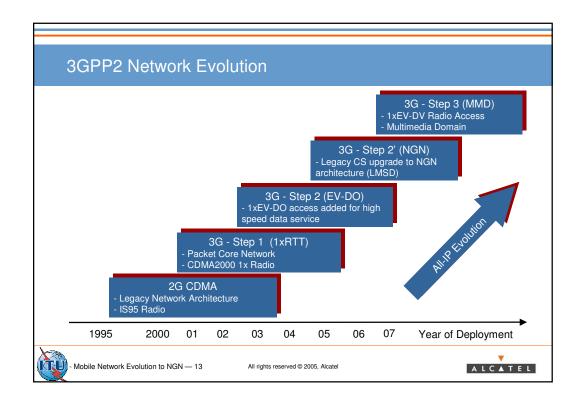


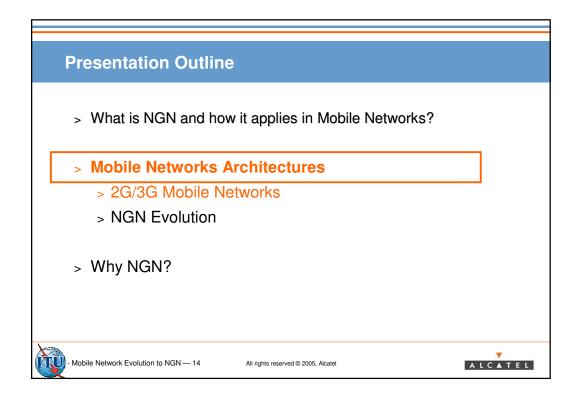


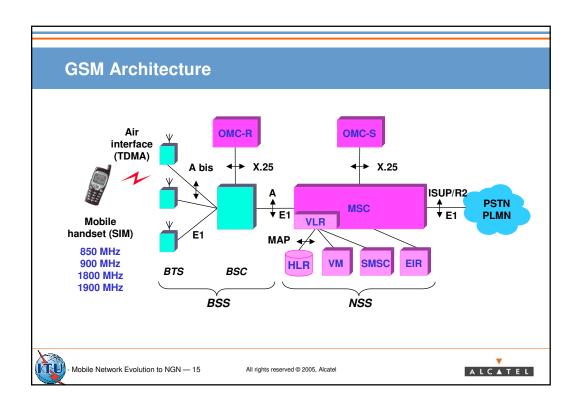


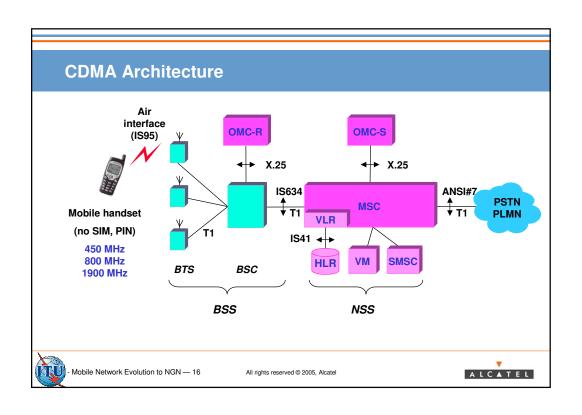


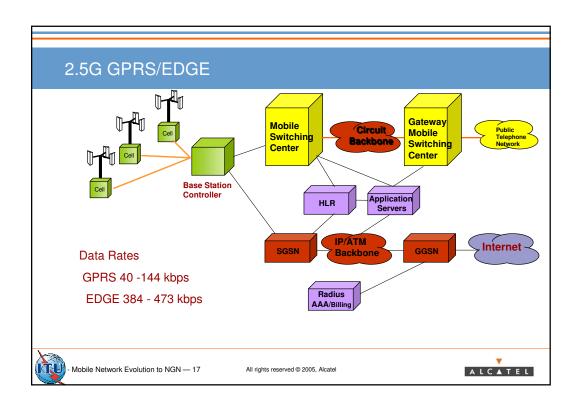


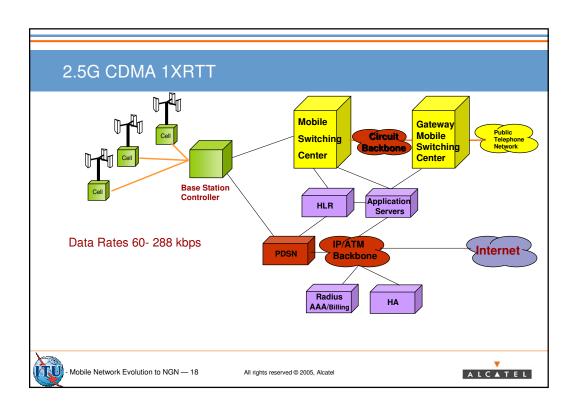


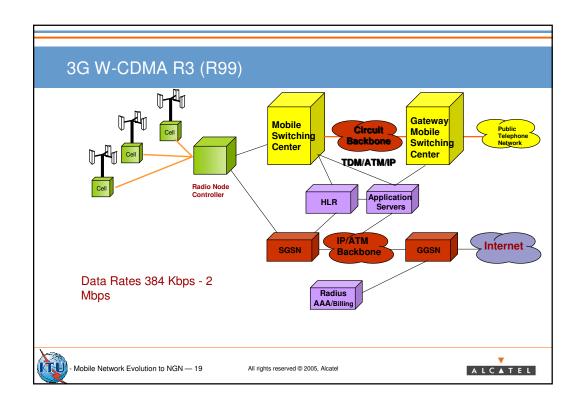


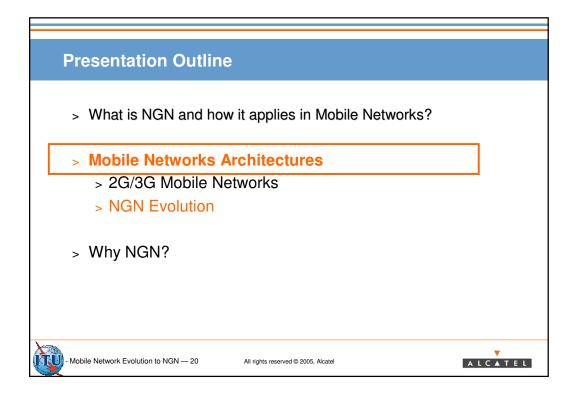


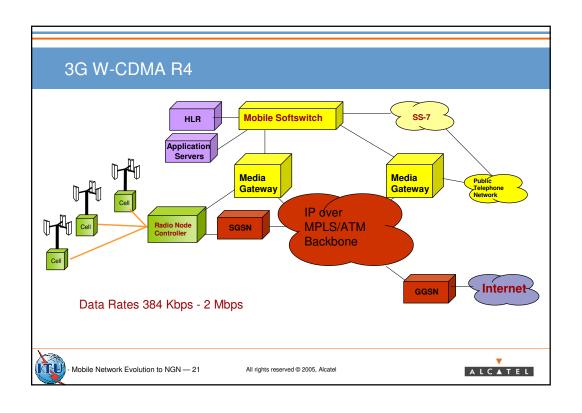


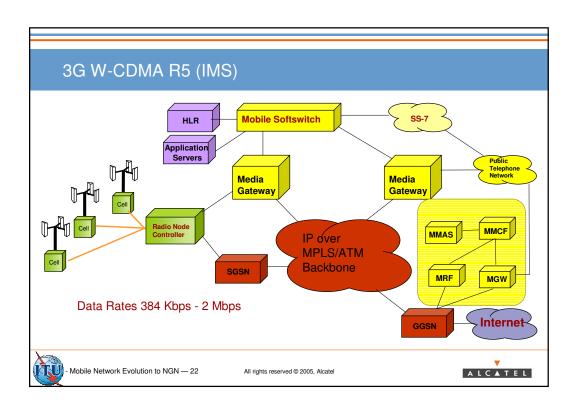


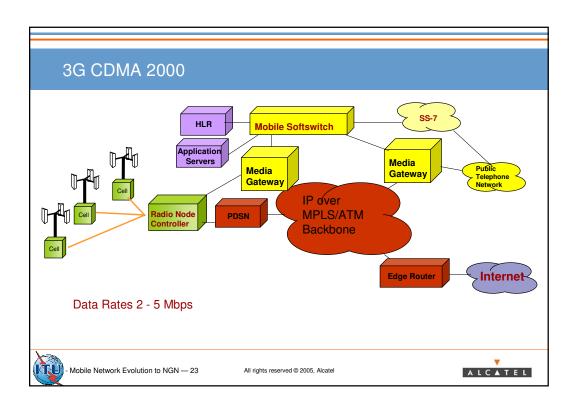


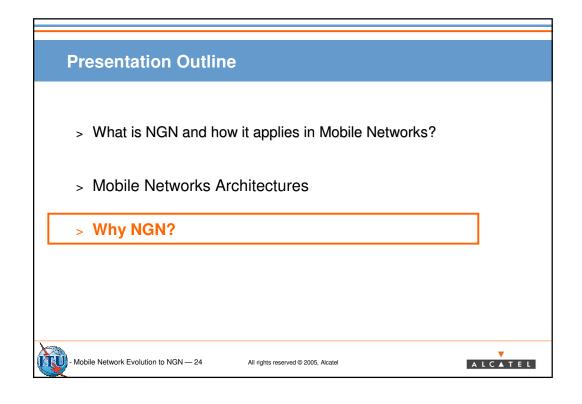


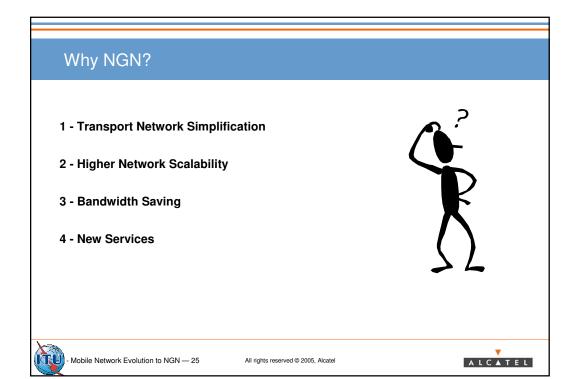


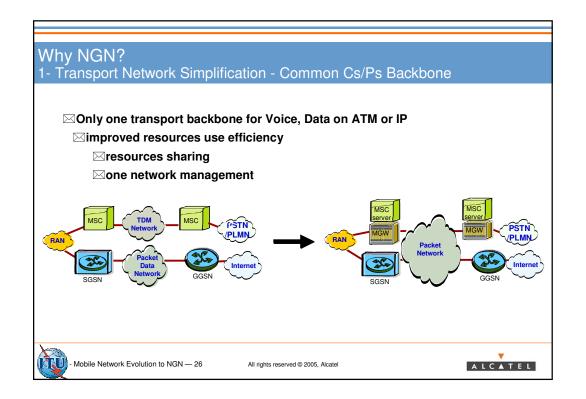


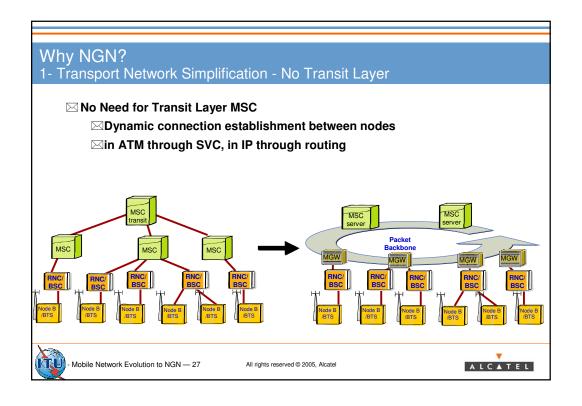

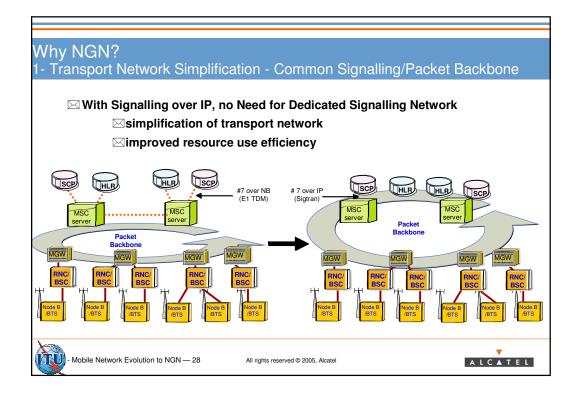

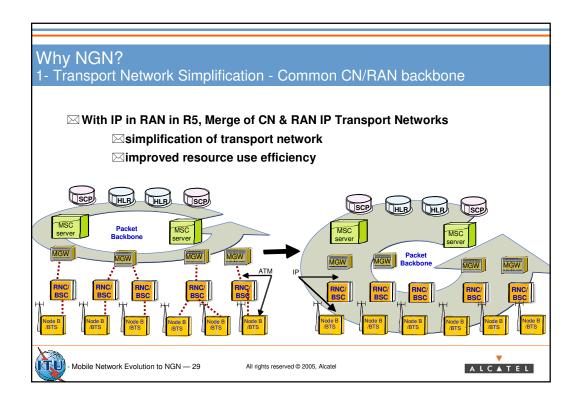


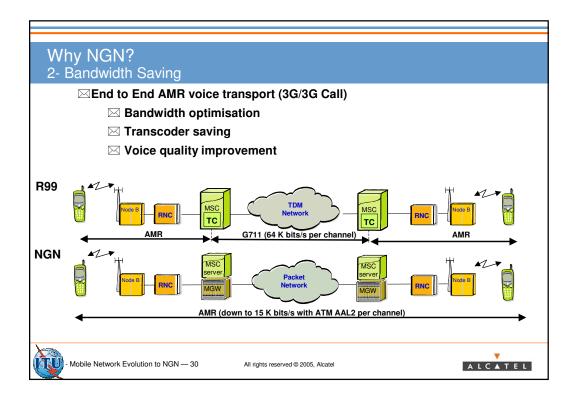


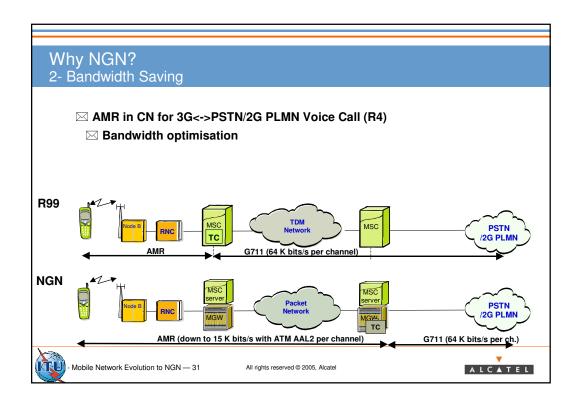


#### Why NGN? 3- Bandwidth Saving (CS domain) Transport Bandwidth Efficiency (from R4 & beyond) G711 over TDM AMR over ATM AAL2 AMR over AMR over IP V6 over transport type AMR over POS IP V4 AMR over AMR over AMR over GE IP V6 POS IP V6 GE IP V4 ATM AAL2 ATM AALS (reference) ATM AAL5 kb/s per voice channel 51 51 85 64 15 34 44 49 59 kb/s per 64kb data ch. 64 121 141 151 171 153 204 N/A 85 $\bowtie$ ATM AAL2: the most efficient for both Voice and 64kb/s Data ⊠ POS: the most efficient of the IP transport but data traffic on Cs should be low w/r to voice traffic Mobile Network Evolution to NGN — 32 All rights reserved © 2005, Alcatel ALCATEL

# 

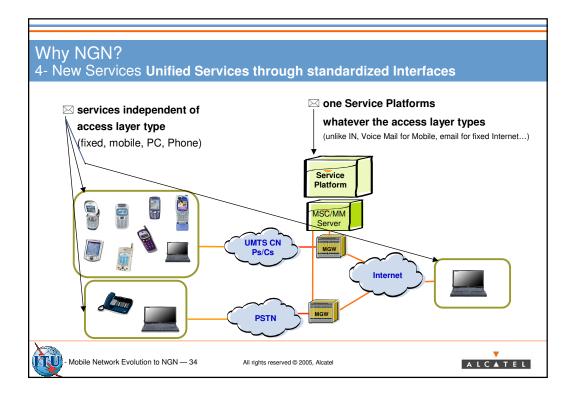

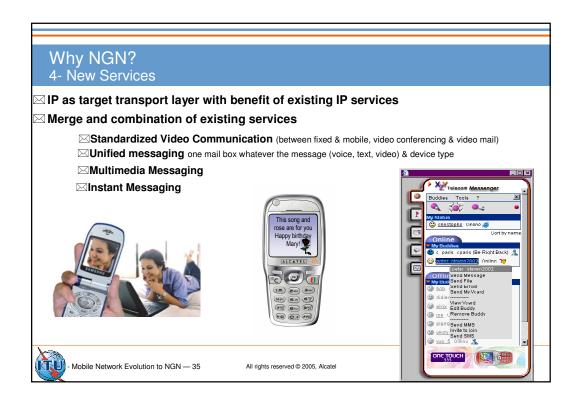

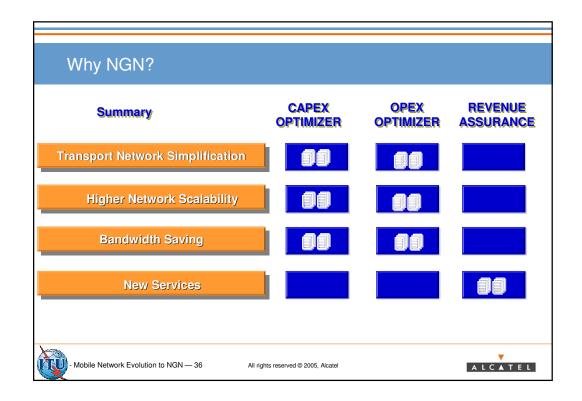

## Conclusion

- > NGN is the separation between Control and Transport
- > NGN is mainly introduced in 3G UMTS R4/R5 and CDMA2000 1x EV-DV
- > Only one transport backbone for Voice, Data on ATM or IP
- > Bandwidth optimisation, Transcoder saving & Voice quality improvement when Mobile to Mobile/PSTN calls using TrFO
- > Unified Services through standardized Interfaces independent of access layer type (fixed, mobile, PC, Phone)
- > News Services (Merge and combination of existing services):

  - □ Unified messaging
  - **⋈** Multimedia Messaging
  - **⋈** Instant Messaging



All rights reserved © 2005, Alcatel



